




# Ventilation

Product catalogue 2019  
for professionals

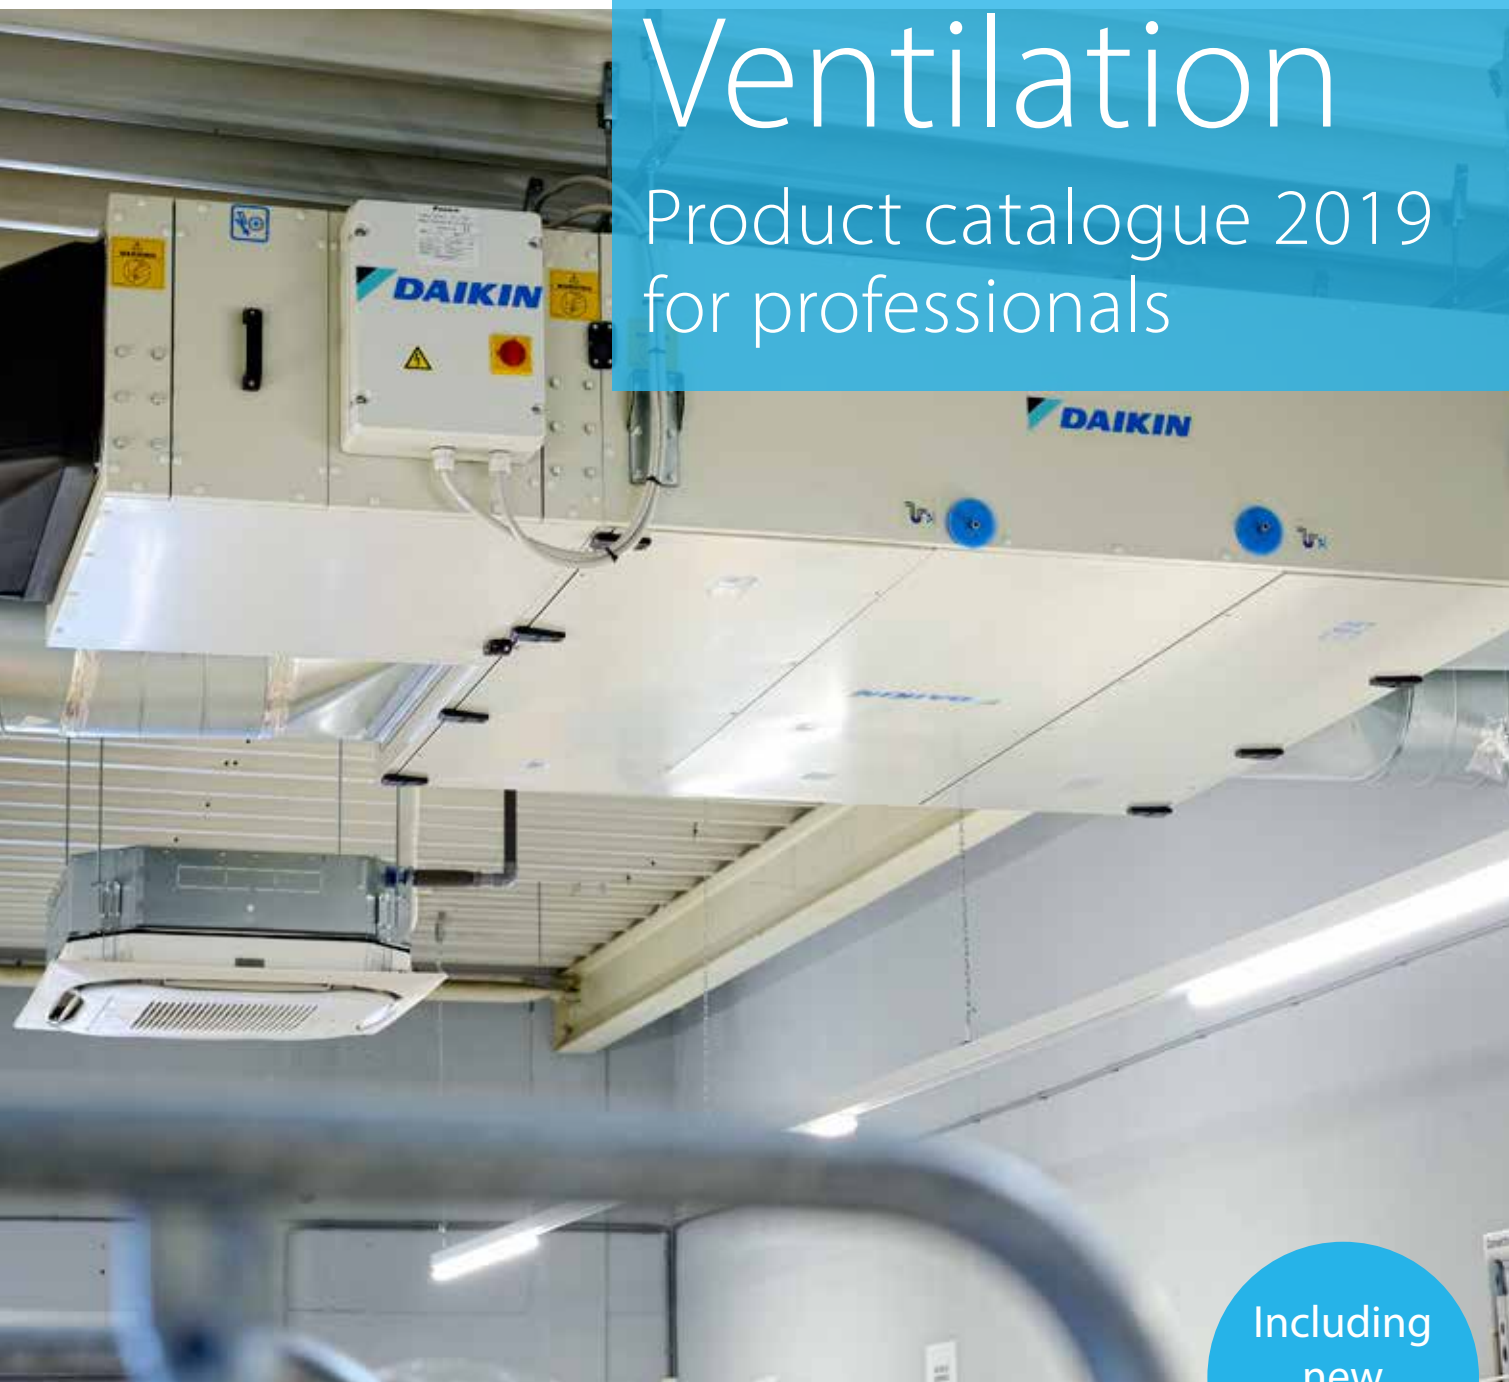

Including  
new  
Modular L

Fresh air for the residential and commercial sector  
Heat reclaim ventilation and air handling applications

MODULAR L (SMART)



D-AHU MODULAR R


# Table of contents

The widest ventilation range on the market	4
ERV / HRV - Heat reclaim ventilation units	9
› Modular L Smart (ALB-RBS/LBS) <b>NEW</b>	
› VAM-FC/J / VKM-GB(M)	
Condensing units for AHU	29
Options & accessories	42
Tools and platforms	49
Technical drawings	57

## 5 reasons why Daikin's ventilation range is unique in the market

### 1 Market leading controls & connectivity

- › Interlock of ventilation and air conditioning system
  - Control ERV/HRV and air conditioning from the same controller
  - Aligns the operation mode between the systems to save energy
- › Easy integration in the total solution
  - Online control and monitoring via the Daikin Cloud Service
  - Full portfolio integration in the intelligent Touch Manager, Daikins cost-effective mini BMS
- › User-friendly controller with premium design
  - Intuitive touch button control

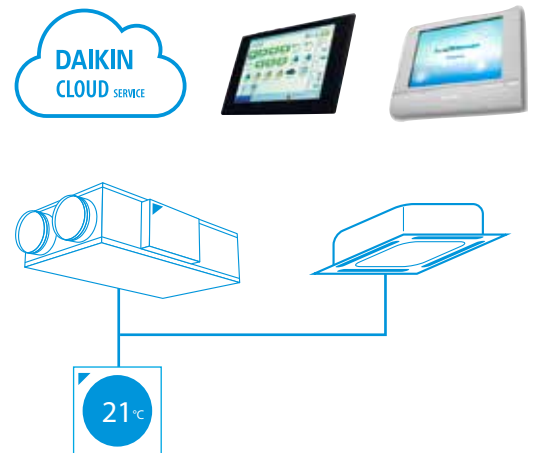

Madoka



red dot award 2018  
winner

### 2 Unique installation benefits

- › Integrates seamlessly in the Daikin total solution, ensuring a single point of contact
- › Total fresh air solution with Daikin supplying both the VAM/Modular L Smart and the electrical heater
- › Daikin AHU and condensing unit connect Plug & Play thanks to same pipe diameters, factory mounted controls, expansion valves, etc.





### 3 High energy efficiency

- › Energy recovery of up to 92%, reducing running costs
- › Free nighttime cooling using fresh outside air
- › Inverter driven centrifugal fans
- › ErP compliant

Up to  
**92%**  
heat recovery

### 4 Best comfort

- › Wide range of units to control fresh air and humidity
- › Wide range of optional filters to suit the application available up to ePM<sub>1</sub> 80% (F9)
- › Special paper heat exchanger recovers heat and moisture from outgoing air to warm up and humidify incoming air to comfortable levels (VAM, VKM)



### 5 Top reliability

- › Most extensive testing before new units leave the factory
- › Widest support network and after sales service
- › All spare parts available in Europe



## Did you know?

CO<sub>2</sub> levels and ventilation rates all have significant, independent impacts on cognitive function:

#### COGNITIVE FUNCTION SCORES ...



**+ 61%**  
IN GREEN BUILDING  
CONDITIONS



**+ 101%**  
IN ENHANCED  
GREEN BUILDING CONDITIONS

# Widest range of DX integrated ventilation on the market

Daikin offers a variety of solutions from small heat recovery ventilation to large-scale air handling units for the provision of fresh air ventilation to homes, or commercial premises.

## Ventilation solutions

Daikin offers state-of-the-art ventilation solutions that can easily be integrated into any project:

- › **Unique portfolio** within DX manufacturers
- › High-quality solutions complying with the **highest Daikin quality standards**
- › **Seamless integration** of all products to provide the best indoor climate
- › All Daikin products connected to a single controller for **complete control** of the HVAC system.

## Heat Reclaim Ventilation - Ventilation with heat recovery as standard


Our heat recovery units **recover sensible heat** (Modular L / Modular L Smart) and **latent heat** (VAM/VKM), substantially reducing the load on the air conditioning system up to 40%.

## Ventilation with DX connection - Control over fresh air temperature


Daikin offers a range of inverter condensing units to be used in combination with Daikin AHUs for ultimate control over the fresh air. There are 4 control possibilities when **combining AHU and Daikin outdoor units** hence offering all the required flexibility for any installation. Indoor units can be combined to the same outdoor unit to reduce the installation costs. For **false-ceiling installations** where space is a constraint, the VKM can fit perfectly to deliver fresh air at a comfortable temperature and it has an optional humidification element.

### Five components of indoor air quality

- › **Ventilation:** Ensures the provision of fresh air
- › **Energy recovery:** Delivers energy savings by transferring heat and moisture between airflows
- › **Air processing:** Delivers the right supply temperature to decrease the indoor unit load
- › **Humidification:** Ensures relative indoor humidity levels are respected
- › **Filtration:** Separates pollen, dust and pollution odours that are harmful to individuals' health

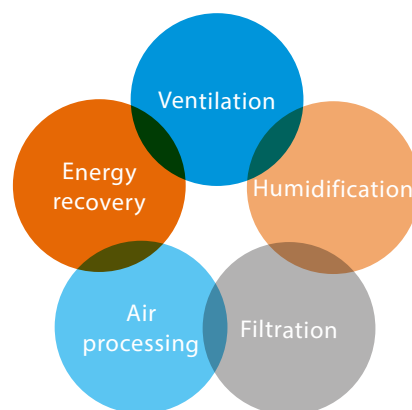

### Fresh air portfolio

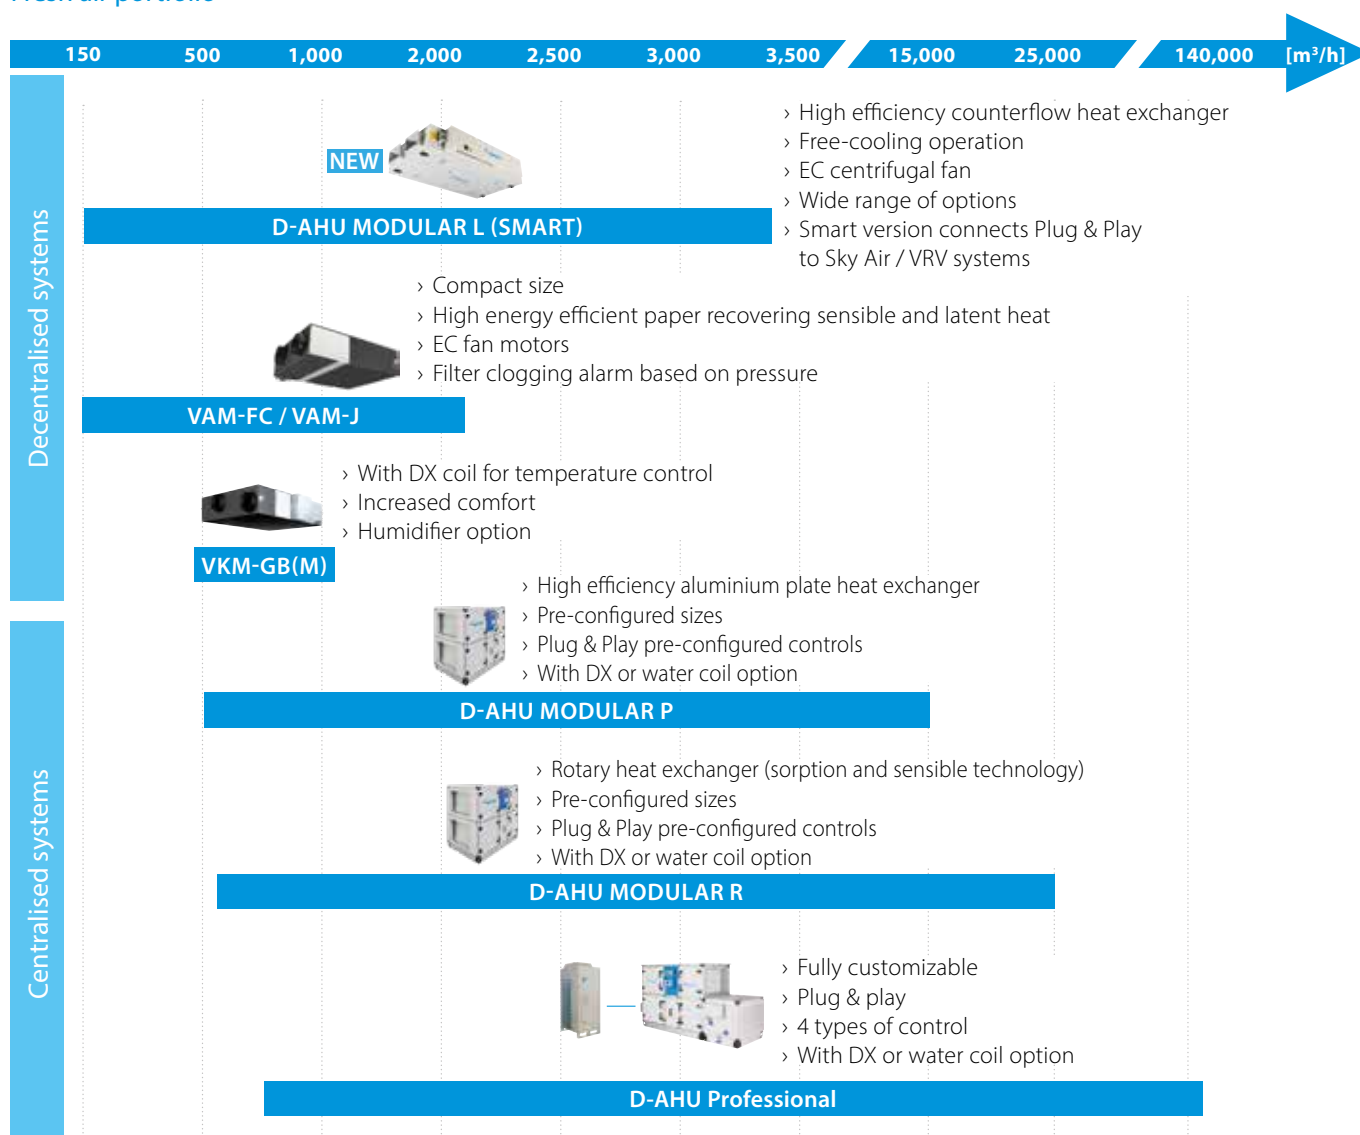




## Direct integration into the Sky Air or VRV control solution

- › Saves up to 40% in running costs
- › Unified control point for the complete air conditioning and ventilation installation

Wide range of decentralised ERV/HRV units to suit the building needs

# Energy / Heat Reclaim Ventilation

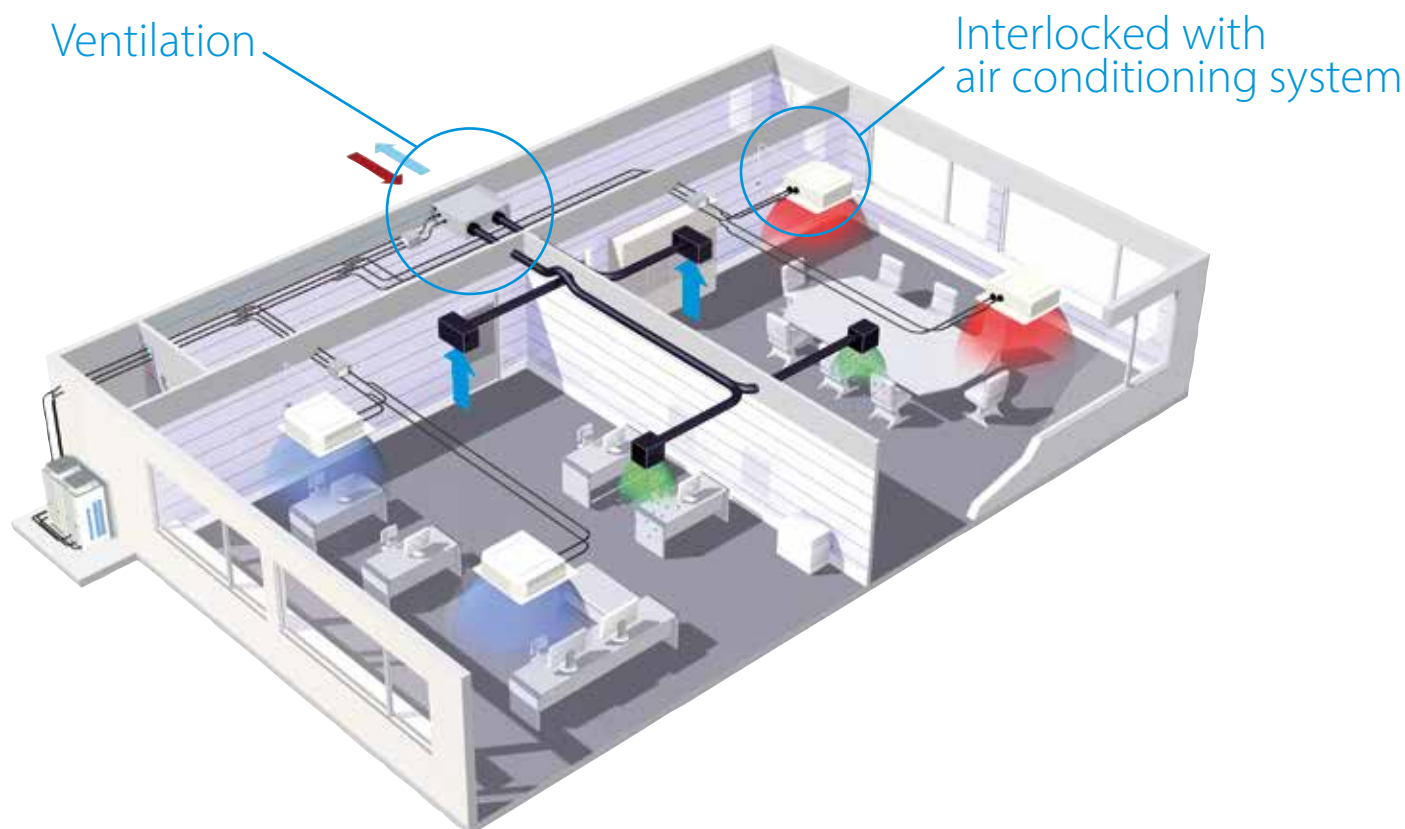

**NEW**



**Premium efficiency heat recovery unit  
Modular L (Smart) (ALB-(RBS/LBS))**

17

- › Heat recovery unit
- › Counter flow plate heat exchanger
- › ESP up to 600 Pa
- › Operates as stand-alone or combined with Sky Air or VRV systems



**Heat reclaim ventilation (VAM-FC/J)**

22

- › Heat and moisture recovery
- › Achieve free cooling with fresh outdoor air
- › Operates as stand-alone or combined with Sky Air or VRV systems



**Heat reclaim ventilation with humidification  
and air processing (VKM-GB(M))**

22

- › Heat and moisture recovery
- › Humidification and air processing (preconditioning) of fresh air
- › Achieve free cooling with fresh outdoor air
- › Plug & Play piping and wiring connection with Daikin VRV unit(s)




Benefits of  
Daikin ERV/HRV systems

# 1 Market leading controls & connectivity

## Interlock of the ventilation operation with the air conditioner operation

Interlock of the ventilation operation with the air conditioner operation greatly simplifies overall system control. The same remote controller centralises air conditioning and ventilation

functions. By incorporating a variety of centralised control equipments, the user can build a large, high grade centralised control system.

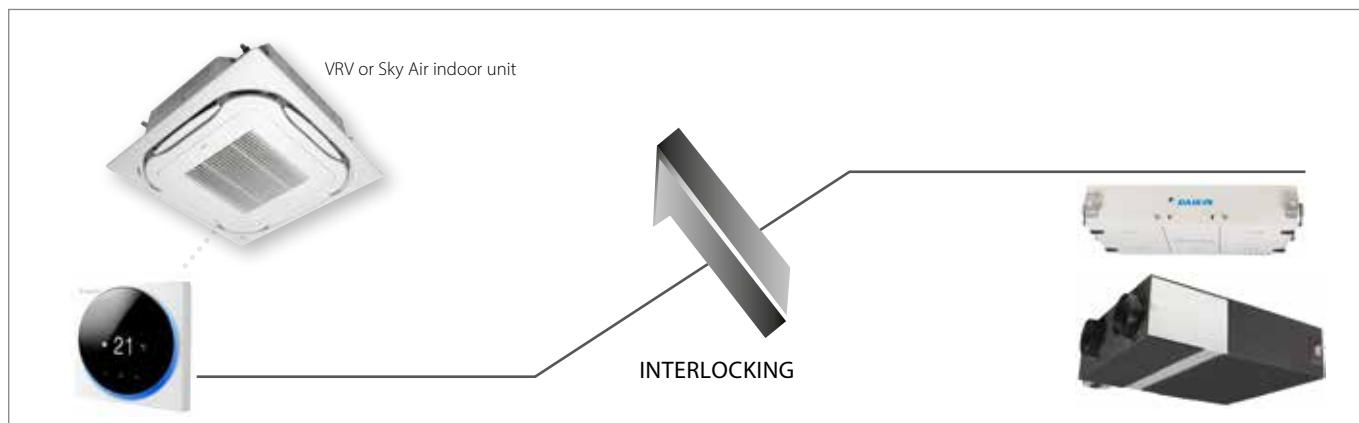

## Madoka

User-friendly wired remote controller with premium design



BRC1H519W/S/K

- › Sleek and elegant design
- › Intuitive touch button control
- › 3 color versions
- › Advanced settings and monitoring can be easily done via your smartphone
- › Flat back for easy wall installation
- › Compact to fit standard size socket boxes



reddot award 2018  
winner



Advanced user settings



Field settings

## Plug & Play - integrated ventilation

- › One-stop shop for all system components, which results in streamlined design and business solutions.
- › Efficient project follow-up, installation and subsequent commissioning and maintenance.
- › Ventilation easily interlocked to air conditioner operation thanks to simplified system control.



## 2 Easy and flexible installation

### High Static Pressure

External static pressure (ESP) up to 600 Pa (ALB) facilitates the use with flexible ducts of varying lengths.


### Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within  $\pm 10\%$

#### Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance → the real air flow may be much lower or higher than designed.

Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (45 fan curves are available on every model (ALB/VAM)), making installation much faster.

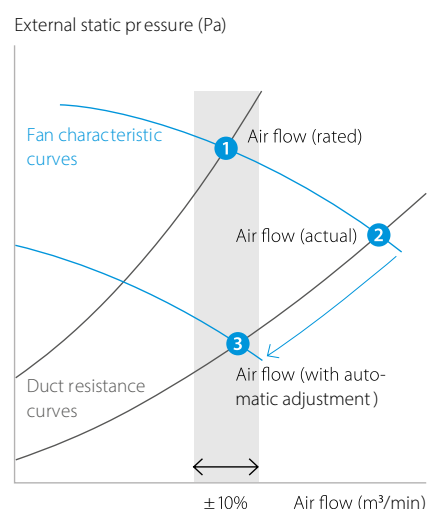

### Wide operation range

The ERV/HRV unit can be installed practically anywhere.

The standard operation range (outdoor temperature) is from  $-15^{\circ}\text{C}$  to  $40^{\circ}\text{CDB}$  for VKM units, from  $-10^{\circ}\text{C}$  ( $+5^{\circ}\text{C}$  in case of upside-down installation) to  $46^{\circ}\text{CDB}$  for VAM units, and can be extended down if a Daikin preheater is installed.


<sup>1</sup> Contact your local dealer for more information and restrictions



Optional pre-heater for VAM



Optional pre-heater for Modular L Smart

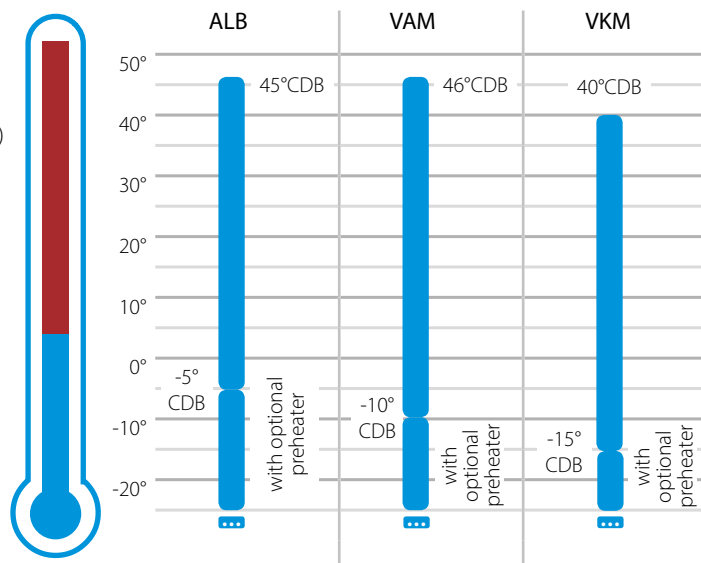

# Flexible installation

## Slim Design


At just 280 mm high, the slim design of the HRV unit enables it to be mounted in narrow ceiling cavities and irregularly shaped spaces



## Flexible

Compared to a standard air handling unit, the HRV models provide much greater flexibility to match the actual building use, in case of a multi-tenant installation. Additionally, the renovation of a building can be carried out in phases.

### ERV/HRV model:

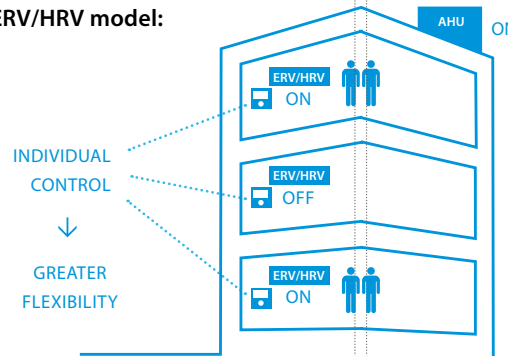


### Standard air handling unit:

CENTRAL CONTROL

## "Super Wiring" System

A Super Wiring system is used to enable the shared use of wiring between indoor units, outdoor units and the centralised remote control. This system makes it easy for the user to retrofit the existing


system with a centralised remote control, simply by connecting it to the outdoor units. Thanks to a non polarity wiring system, incorrect connections become impossible and installation time is reduced.

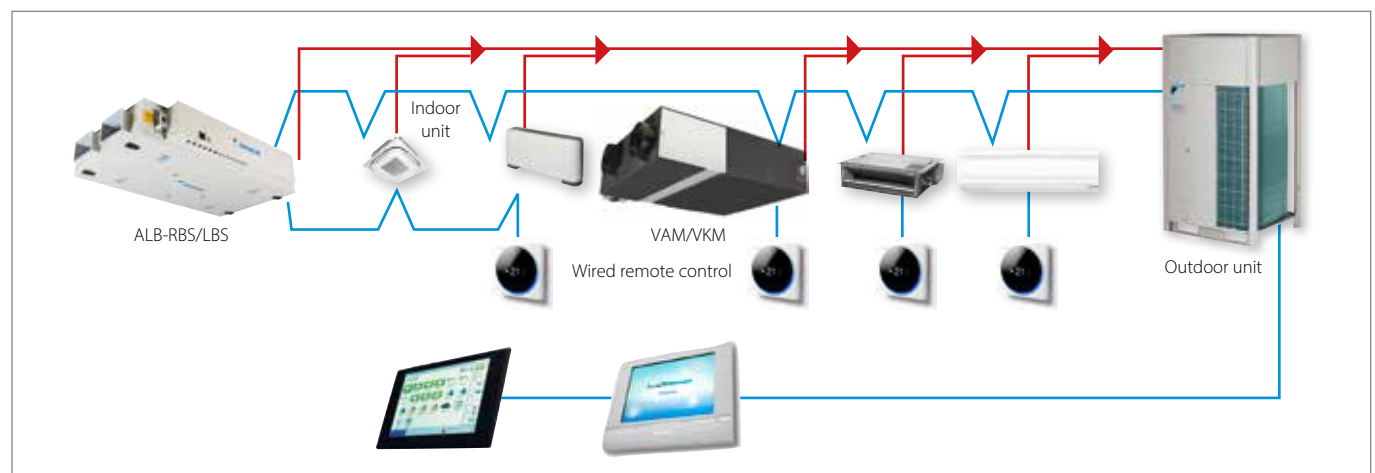

## Connection to field-supplied booster fan increases flexibility even more

- › Longer ducting or use of central duct possible
- › Overcomes actual field situation when ducting is different from calculation
- › Lower cost by using the booster fan instead of replacing with a larger unit when the ESP is not matched

### Example when HRV ESP is not high enough or field situation differs from calculation

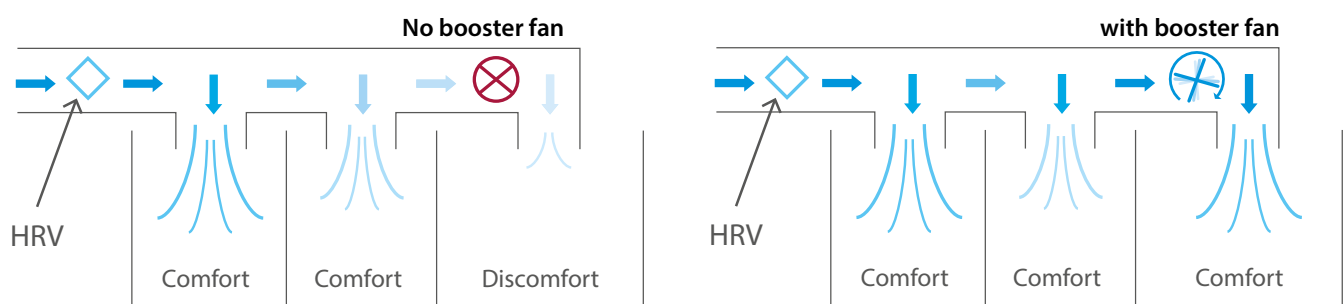

### 3 High efficiency

## Energy saving ventilation via heat recovery of both heat and humidity

Recovers up to  
**92%**  
of wasted heat

Daikin's ERV/HRV solutions prevent energy being wasted by recovering up to 92% waste heat from the outgoing air instead of simply expelling the heat, offering high energy efficiency.




ALB-RBS/LBS

## Reduce the load on the air conditioning system by up to 40%

- › 24% by using heat recovery ventilation (in comparison with normal ventilation fans)
- › 6% by switching over to auto-ventilation mode
- › 2% by using the pre-cool, pre-heat control (reduces air conditioning load by running the HRV unit after the air conditioning is switched on)
- › 5% by enabling the free cooling operation overnight
- › 3% by preventing over-ventilation with the optional CO<sub>2</sub> sensor

### Different operation modes of ERV/HRV units

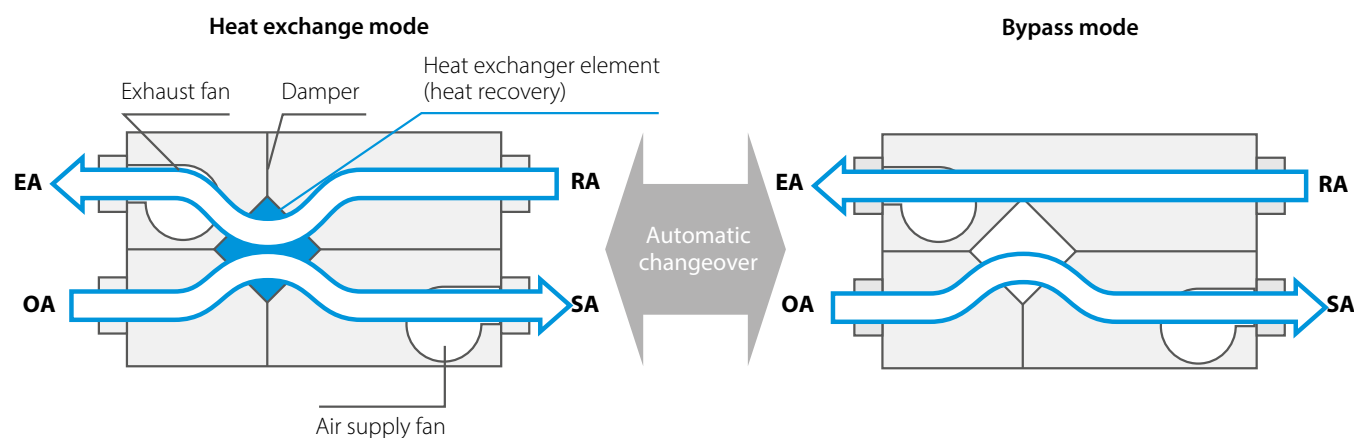


EA: Exhaust air RA: Return air (from room) OA: Outdoor air SA: Supply air (to room)

# Nighttime free cooling

Nighttime free cooling operation is **an energy saving function operating at night** when the air conditioning is switched off. By ventilating rooms containing office equipment that increases room temperature,

free cooling reduces the cooling load when air conditioning is switched on in the morning, reducing the daily running costs.

The VAM and Modular L Smart can also perform nighttime free cooling in stand alone operation. The set temperature is a field setting at installation.

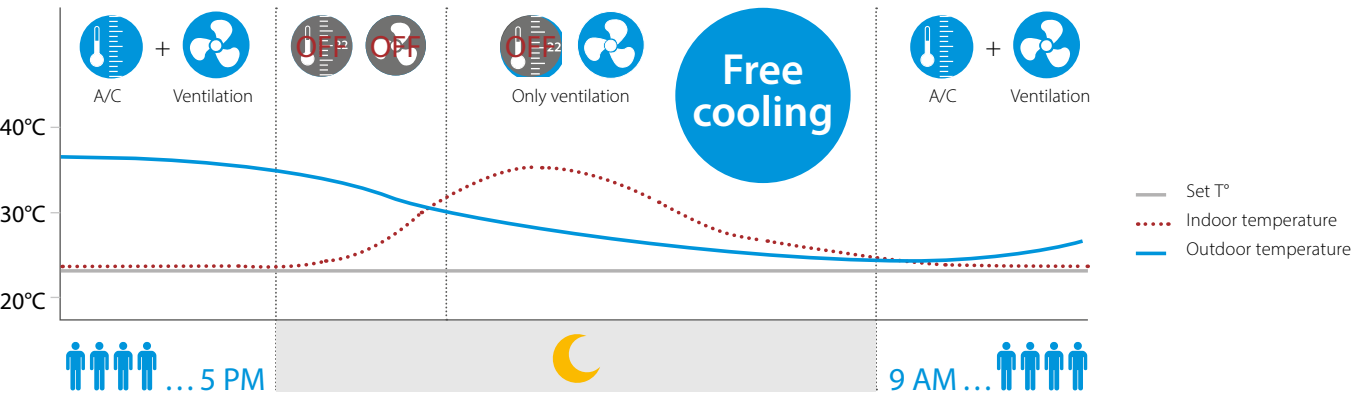


# Prevent energy losses from over-ventilation with CO<sub>2</sub> sensor

Enough fresh air is needed to create an enjoyable environment, but ventilating constantly is leading to energy waste. Therefore an optional CO<sub>2</sub> sensor can be

installed which switches off the ventilation system when there is enough fresh air in the room, thus saving energy.

Example of CO<sub>2</sub> sensor operation in a meeting room:

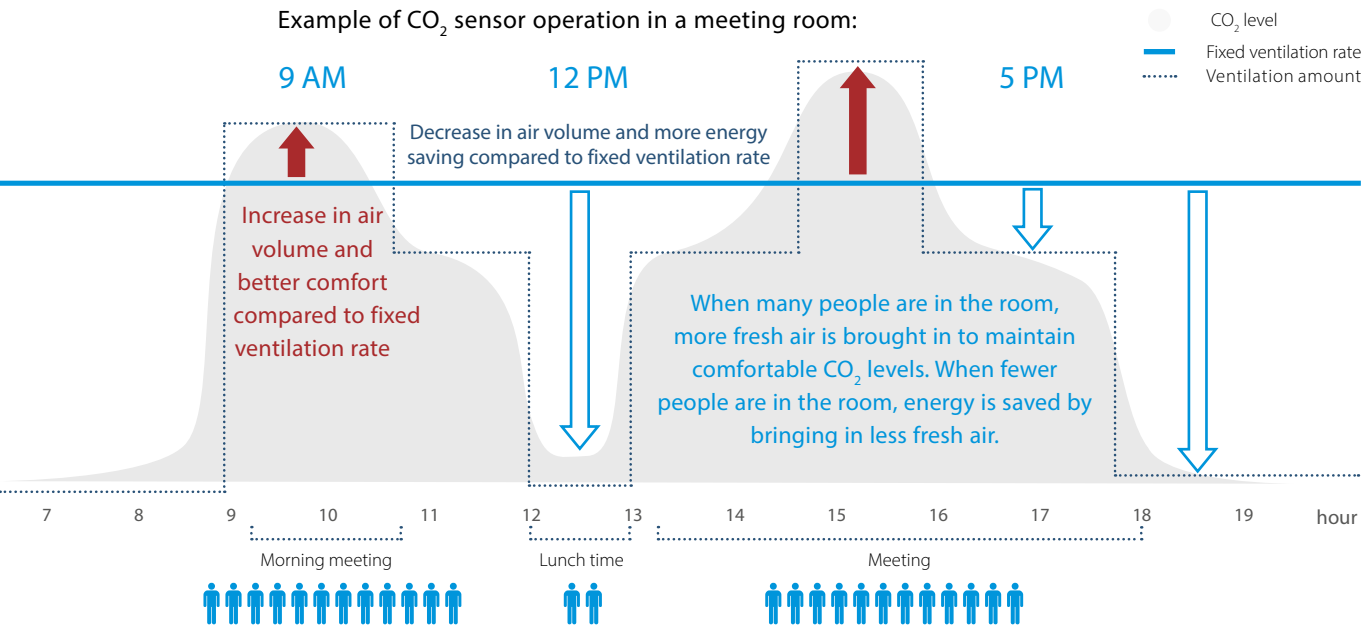

## Up to 75% less energy consumed for ventilation in Herten building

A two-year test at a 'netZero Energy Building' in Herten has revealed that a huge energy saving is possible by using CO<sub>2</sub> sensors in conjunction with the Daikin VAM systems.

## 4 Best Comfort

- High quality indoor air
- Whisper quiet

### Optional medium and fine dust filters available

Optional filters up to ePM<sub>1</sub> 70% (F8, VAM) and ePM<sub>1</sub> 80% (F9, ALB) are available to meet your customer request or the local legislation.




The optional filter comply with ISO 16890

### Can operate in over and underpressure to prevent unpleasant odours

The user can select 2 fresh-up modes via the remote control for a more comfortable air environment.

#### 1. Supply rich mode (overpressure):

A higher air supply than air exhaust maintains proper room pressure to prevent back-flow of toilet/kitchen odours or moisture inflow.

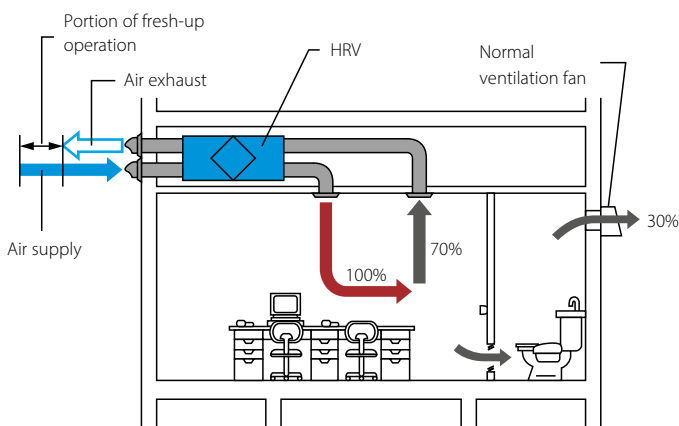


eg. Office

Preventing that toilet odours flow to the office

#### 2. Exhaust fresh-up (underpressure):

A higher exhaust air than air supply decreases room pressure to prevent the leaking of odours or floating bacteria into other rooms.

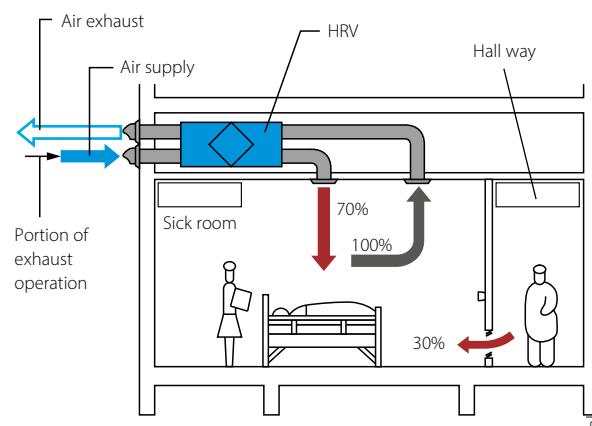

eg. Hospital

No bacteria can flow from the sick room to the hall way

### Low operation sound level

Continuous research by Daikin into reducing operation sound levels has resulted in sound pressure levels down to 20.5dBA (VAM150).

Daikin ERV/HRV unit →

DBA	PERCEIVED LOUDNESS	SOUND
0	Threshold of hearing	-
20	Extremely soft	Rustling leaves
40	Very soft	Quiet room
60	Moderately loud	Normal conversation
80	Very loud	City traffic noise
100	Extremely loud	Symphonic orchestra
120	Threshold of feeling pain	Jet taking off


# Modular L Smart

## Premium Efficiency Heat Recovery Unit

NEW



ALB-RBS/LBS

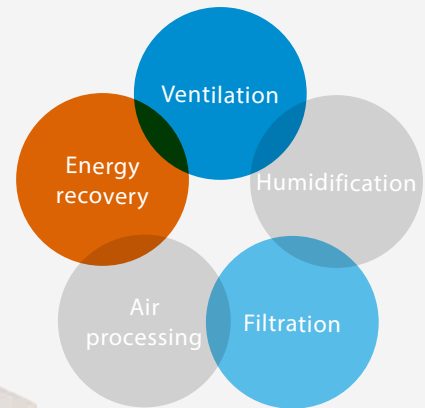

### Highlights

- › Connects Plug&Play into the Sky Air and VRV control network
- › Easy installation and commissioning
- › Internal pre-filter stage (up to ePM<sub>1</sub> 50% (F7) + ePM<sub>1</sub> 80% (F9)) making the unit reach highest indoor air quality requirements.
- › Wide air flow coverage from 150m<sup>3</sup>/h to 3,450m<sup>3</sup>/h
- › Exceeding ERP 2018 requirements
- › Best choice when compactness is needed (only 280 mm height up to 550 m<sup>3</sup>/h)
- › 50 mm double skin panel (120 kg/m<sup>3</sup>) for a maximum sound and thermal insulation

### Heat exchanger

- › Premium quality counter flow plate heat exchanger
- › Up to 92% of the thermal energy recovered
- › High grade aluminum allowing optimum corrosion protection

### EC centrifugal fan

- › Maximum ESP available 600 Pa (depending on model sizes and airflow)
- › Inverter driven with IE4 premium efficiency motor
- › High-efficient blade profiling
- › Reduced energy consumption
- › Optimized SFP (Specific Fan Power) for an efficient unit operation




# Premium quality to meet most sophisticated needs




## Heat exchanger

- › Premium quality counterflow plate heat exchanger
- › Up to 92% of the thermal energy recovered
- › High grade aluminium that allows best corrosion protection
- › Completely joint sealing
- › No screws or rivets in any part

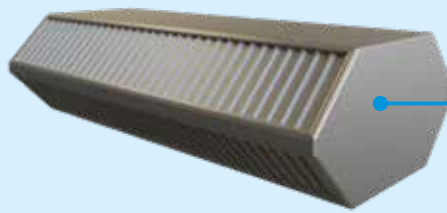

## Filters

- › Easy replaceable compact filters with large surface area, which can be removed from bottom access
- › Up to ePM<sub>1</sub> 50% (F7) + ePM<sub>1</sub> 80% (F9) filtration efficiency
- › No tools are needed to change the filters
- › Fresh air filters\* (ePM<sub>1</sub> 50% (F7) efficiency as standard)
- › Return filters\* (ePM<sub>10</sub> 75% (M5) efficiency as standard)




\*Optional additional filter and pre-filter stage coarse 55% (G4), ePM<sub>10</sub> 75% (M5), ePM<sub>1</sub> 50% (F7), ePM<sub>1</sub> 80% (F9)



## Supply/Return fan

- › Fan/motor combination with very low noise level
- › Reduced energy consumption
- › Inverter driven with IE4 motor efficiency
- › Infinitely variable speed
- › Ultra-efficient blade profiling
- › Maintenance-free ball bearings
- › No screws or rivets in any part



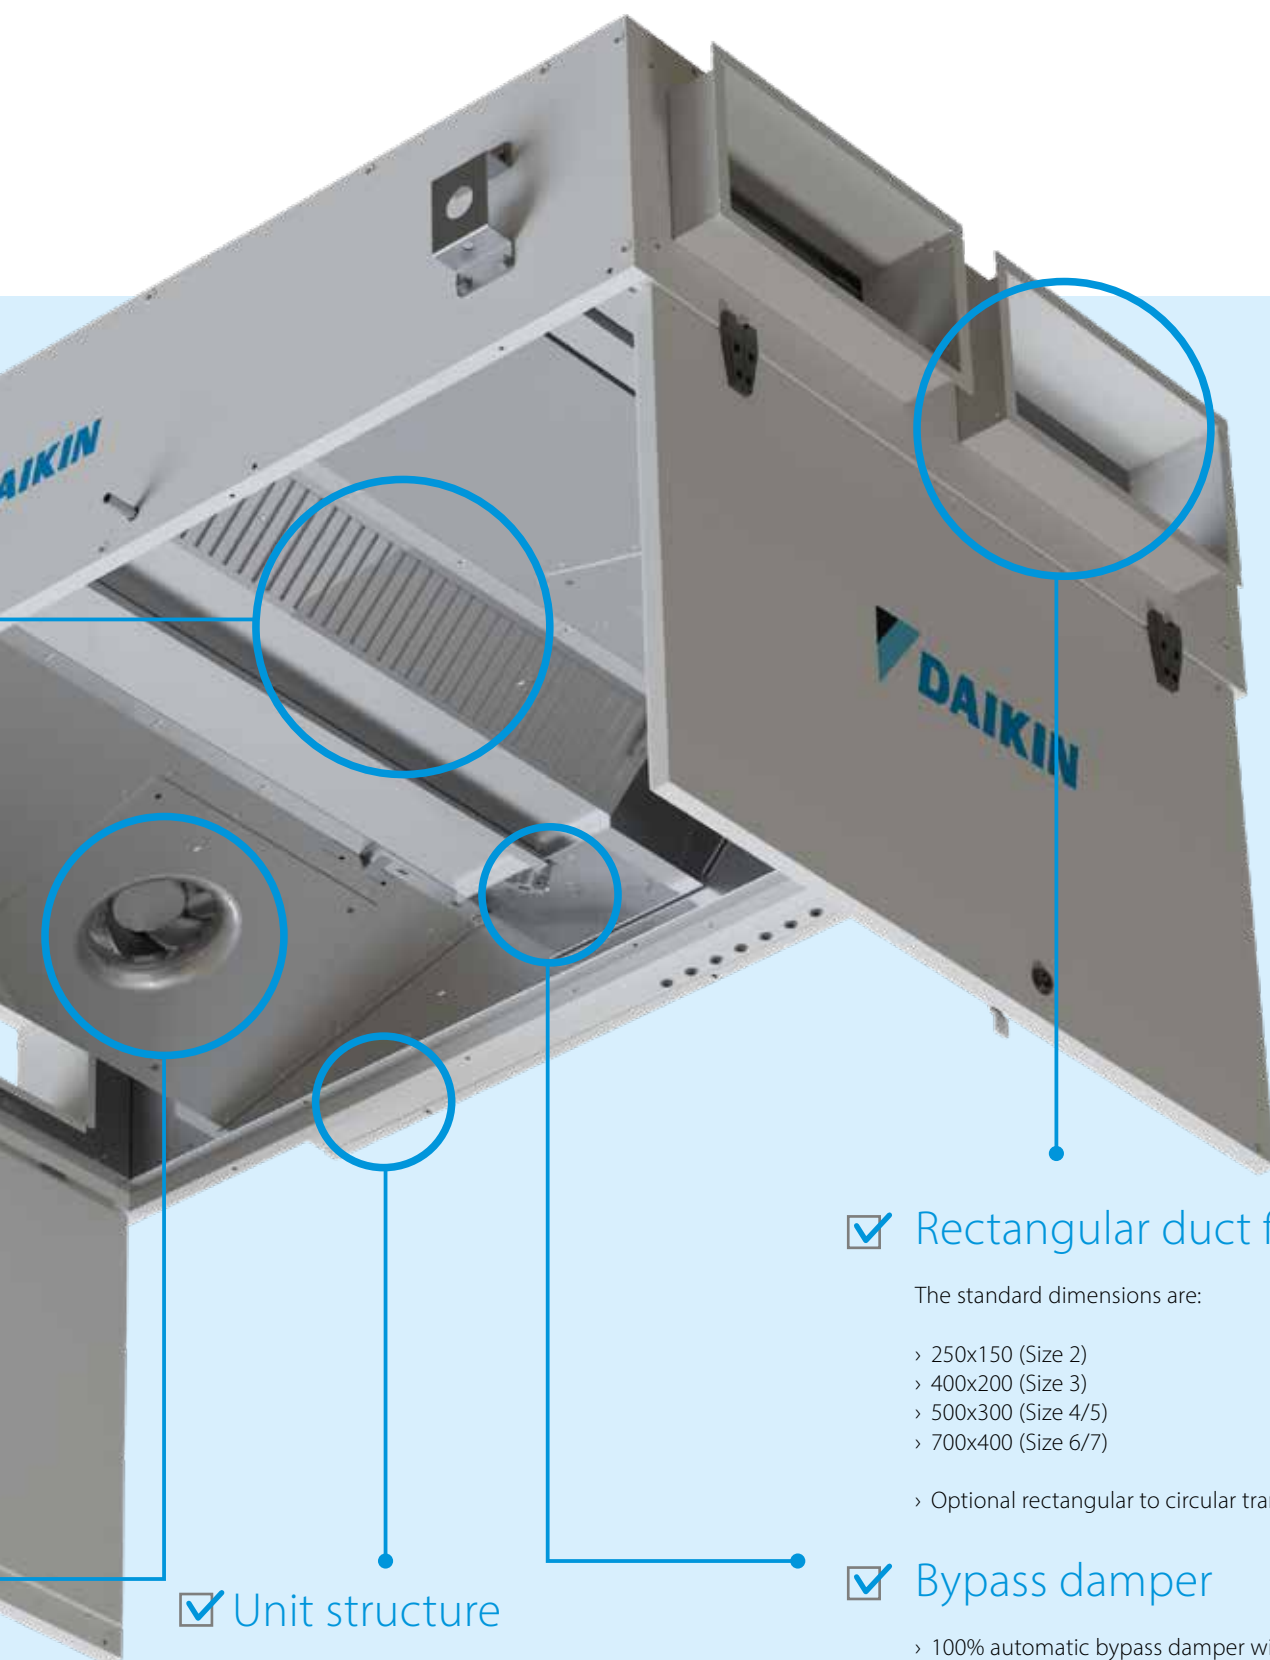

### ✓ Unit structure

- › External pre – painted metal sheet
- › Internal Aluzinc
- › 50 mm Double skin panel thickness
- › Mineral wool insulated
- › Great sound absorption and low noise
- › Hinged or fully removable bottom doors make the unit easy accessible for service and maintenance
- › Unit is accessible from bottom panels
- › Best choice when compactness is needed (only 280 mm height for up to 550 m<sup>3</sup>/h of air flow)

### ✓ Rectangular duct flange

The standard dimensions are:

- › 250x150 (Size 2)
- › 400x200 (Size 3)
- › 500x300 (Size 4/5)
- › 700x400 (Size 6/7)
- › Optional rectangular to circular transition

### ✓ Bypass damper

- › 100% automatic bypass damper with proportional opening for antifreeze and free cooling operation

### ✓ Fully integratable in the DIII network (Sky Air and VRV)

## Technical details




### Control logic

- › Air quality analysis with the capability of monitoring and control of the actual level of CO<sub>2</sub> through optional sensor (accessory)
- › Full automatic bypass to manage free cooling
- › Filter alarm in accordance with the EU Reg 1253
- › DIII-net integration through Daikin building air conditioning control systems (D-BACS)
- › BMS integration through dedicated interfaces (Modbus, BACnet)

### Air flow range

Modular L Smart is available in 6 sizes covering a wide range of applications such as hotels, offices, schools and light commercial buildings

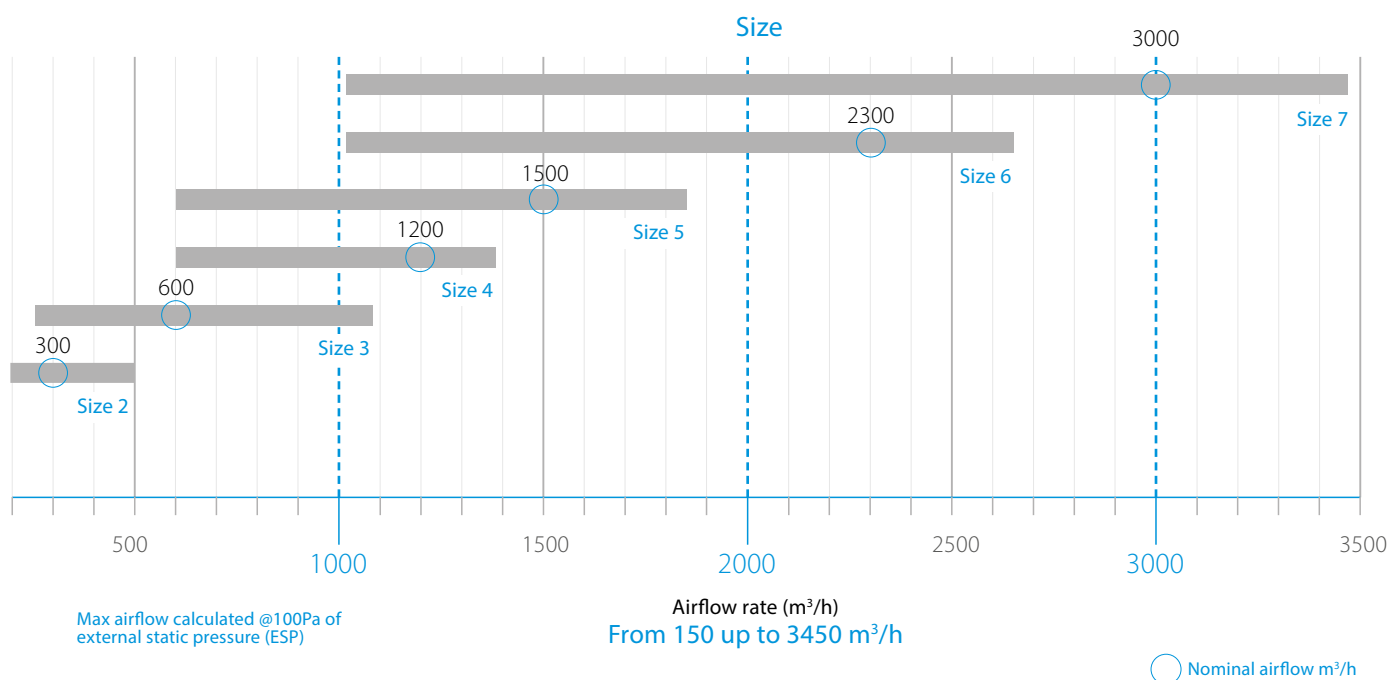



Right drain connection (ALB-RBS)



Left drain connection (ALB-LBS)

## Technical details

D-AHU Modular L Smart		ALB-RBS/LBS	02	03	04	05	06	07
Airflow		m³/h	300	600	1200	1500	2300	3000
Heat exchanger thermal efficiency <sup>1</sup>		%	90	91	90	90	92	91
External static pressure	Nom.	Pa	100	100	100	100	100	100
Temperature after heat exchanger <sup>1</sup>	Nom.	°C	19,4	19,5	19,4	19,2	19,8	19,5
Max ESP @ nom. airflow		Pa	400	450	260	270	250	210
Current	Nom.	A	0,52	1,17	1,91	2,48	3,76	5,39
Power input	Nom.	kW	0,12	0,27	0,44	0,57	0,87	1,24
SFPv <sup>2</sup>		kW/m³/s	1,24	1,49	1,28	1,32	1,32	1,46
ERP compliant			ErP 2018 Compliant					
Electrical supply	Phase	ph	1	1	1	1	1	1
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60
	Voltage	V	220/240 Vac	220/240 Vac	220/240 Vac	220/240 Vac	220/240 Vac	220/240 Vac
Main unit dimensions	Width	mm	920	1100	1600	1600	2000	2000
	Height	mm	280	350	415	415	500	500
	Length	mm	1660	1800	2000	2000	2000	2000
Rectangular duct flange	Width	mm	250	400	500	500	700	700
	Height	mm	150	200	300	300	400	400
Unit Sound Power Level (Lwa)		dB	48	54	57	53	60	57
Unit Sound Pressure Level <sup>3</sup>		dBA	34	39	41	37	44	41
Weight unit		kg	125	180	270	280	355	360

1. Winter design condition: Outdoor: -5°C, 90% Indoor: 22°C, 50%


2. SFPv is a parameter that quantifies the fan efficiency (the lower it is the better will be). This reduces if airflow decreases.

3. According to EN3744. Surrounding, Directivity (Q) = 2, @ 1,5m distance


# ERV

## energy reclaim ventilation

Heat reclaim ventilation, air processing and humidification

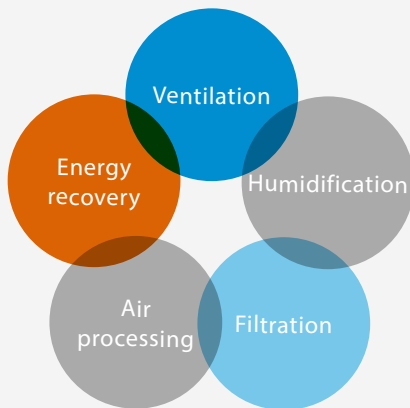

VAM-FC / VAM-J

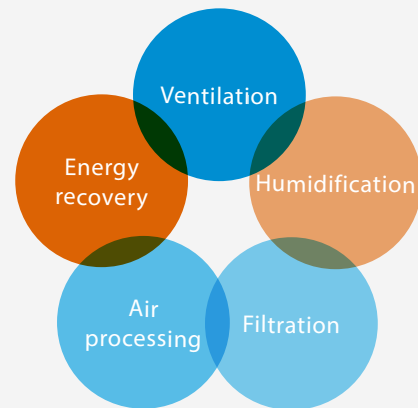

VKM-GB(M)

### High efficiency

- › Energy saving ventilation via enthalpy recovery of both heat and humidity
- › Reduce the load on the air conditioning system by up to 40%
- › Nighttime free cooling
- › Prevent energy losses from over-ventilation with CO<sub>2</sub> sensor

### Maximum flexibility

- › Plug & Play - integrated ventilation
- › Flexible installation
- › Wide range of units
- › High static pressure
- › Wide operation range
- › Connection to field-supplied booster fan increases flexibility even more (VAM-FC/J only)
- › No drain needed (VAM-FC/J only)

### High indoor air quality & whisper quiet operation

- › Optional medium and fine dust filters (VAM-FC/J only)
- › Can operate in over and underpressure to prevent unpleasant odours
- › Low operation sound level

## Energy saving ventilation via enthalpy recovery of both heat and humidity

Recovers up to  
**85%**  
of waste heat



Daikin's ERV solutions prevent energy being wasted by recovering up to 85% waste heat from the outgoing air instead of simply expelling the heat, offering high energy efficiency.

### Specially developed heat exchange element

The heat exchange element rapidly recovers heat contained in latent heat (vapour).

Operation of the high efficiency paper.

Cross flow of air to exchange heat and moisture.

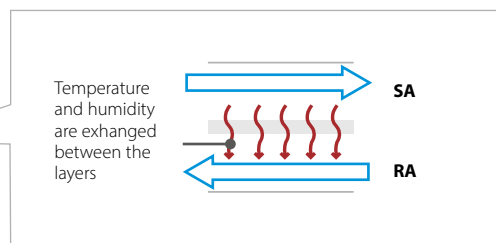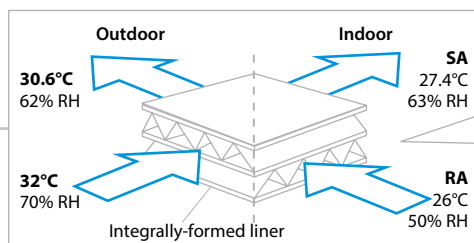

RH: Relative Humidity  
SA: Supply Air (to room)  
RA: Return Air (from room)



## High indoor comfort

Thanks to the heat and moisture exchange the hot and humid outside air is brought to levels close to indoor conditions saving on the air conditioning running cost and maintaining comfort.

## Can be installed horizontally, upside down or vertically

The VAM models do not require a drain, giving greater flexibility for the installation of the units.

In case of upside down or vertical installation the minimum outside temperature is +5°C instead of -10°C.

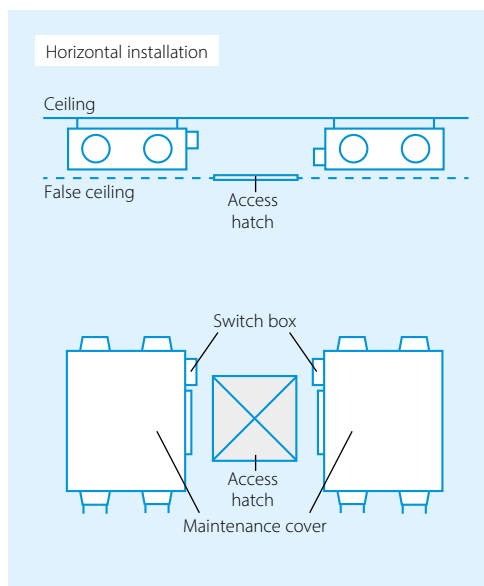




# Creating a high quality environment



Maintain a comfortable indoor environment without fluctuations in room temperature.

## How do the ERV units work?

### In heating

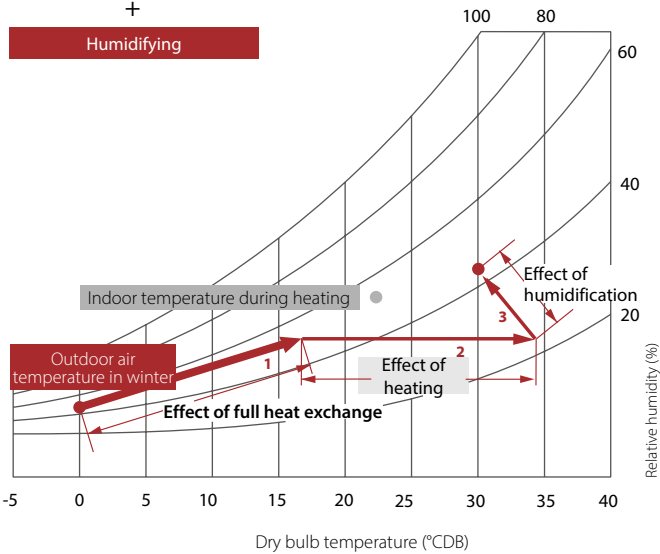

### In cooling

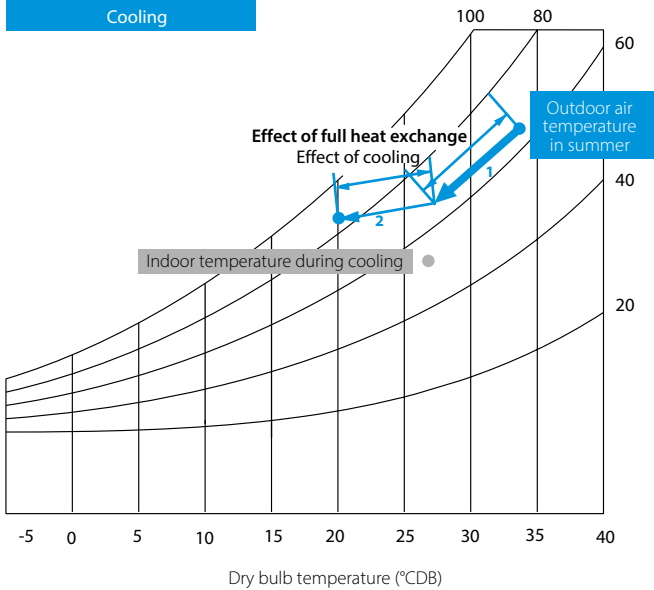

In heating we bring in cold outdoor fresh air and want to avoid cold draught and dry air.

**1.** Cold outside air is crossed with hot inside air.  
In the example the incoming air is heated up from 0 to 16°CDB while keeping the same relative humidity. This is the effect of the heat and moisture exchange.

**2.** The DX coil further heats up the air to prevent cold draught. In the example the incoming air is further heated from 16 to 34°CDB. Because the air is heated up the relative humidity decreases.

**3.** To counter negative effects of dry air the air passes the humidifier which adds moisture in case needed.  
In the example the relative humidity rises from 22 to a comfortable 42%.

The result is incoming fresh air with the same humidity and slightly higher temperature for perfect comfort.

In cooling we bring in hot outdoor fresh air and want to prevent additional load on the air conditioning system and too hot indoor temperatures.

**1.** Hot outside air is crossed with cold inside air.  
In the example the incoming air is cooled down from 34 to 27°CDB while keeping the same relative humidity. This is the effect of the heat and moisture exchange.

**2.** The DX coil further cools down the air to prevent hot indoor temperatures and reduce the load on the air conditioning system.  
In the example the incoming air is further cooled down from 27 to 20°CDB.


**3.** No humidification is needed in cooling as the air is not dried out

The result is incoming fresh air with a slightly lower temperature for perfect comfort.




## Humidification

Operation example: humidification & air processing (heating mode)<sup>1</sup>

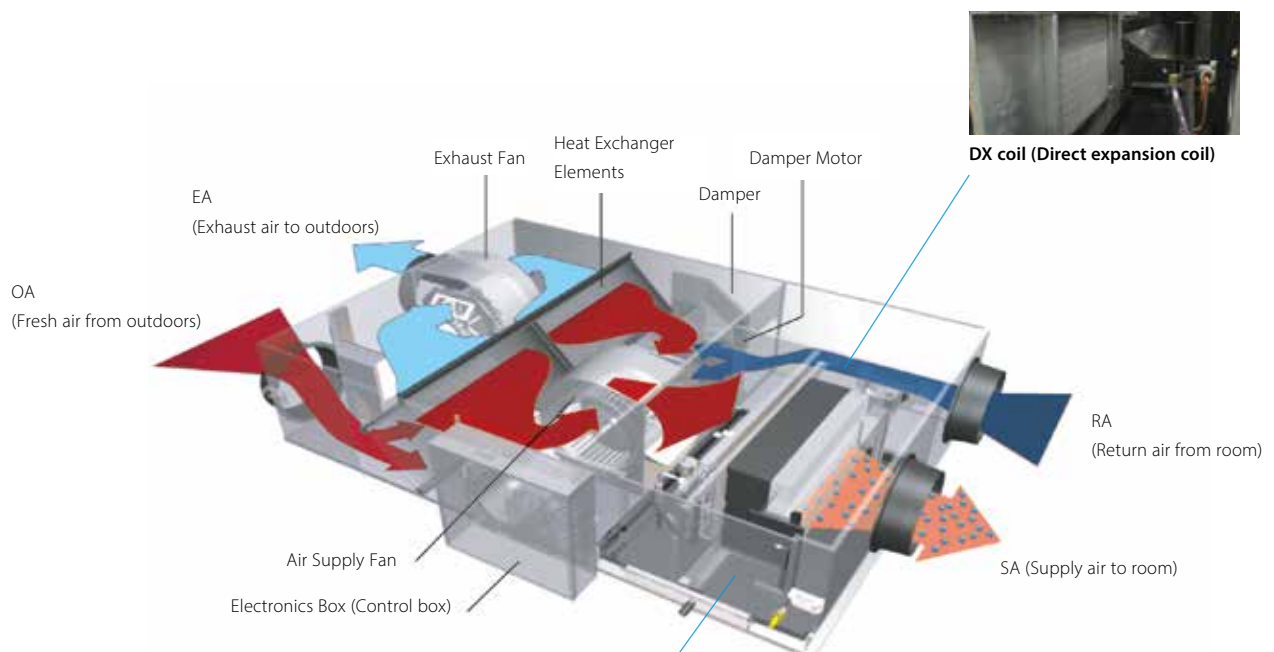

### Humidifier element:

Utilizing the principle of capillary action, water is permeated throughout the humidifier element. The heated air from the DX coil passes through the humidifier and absorbs the moisture.

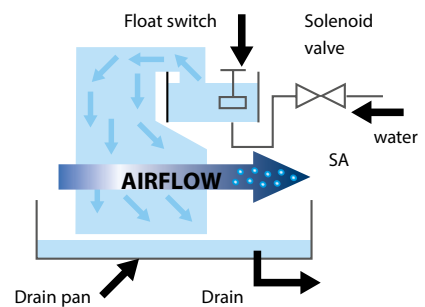


<sup>1</sup> VKM-GM example

# Energy reclaim ventilation

## Ventilation with heat recovery as standard

- **NEW** Thinnest High Efficiency Enthalpy Heat Exchanger in the market (J-series)
- Energy saving ventilation using indoor heating, cooling and moisture recovery
- Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- Prevent energy losses from over-ventilation while improving indoor air quality with optional CO<sub>2</sub> sensor
- **NEW** Possibility to change ESP via wired remote control allows optimisation of the supply air volume (J - series)
- Can be used as stand alone or integrated in the Sky Air or VRV system
- Wide range of units: air flow rate from 150 up to 2,000 m<sup>3</sup>/h
- Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- No drain piping needed
- Can operate in over- and under pressure
- Total solution for fresh air with Daikin supply of both VAM / VKM and electrical heaters

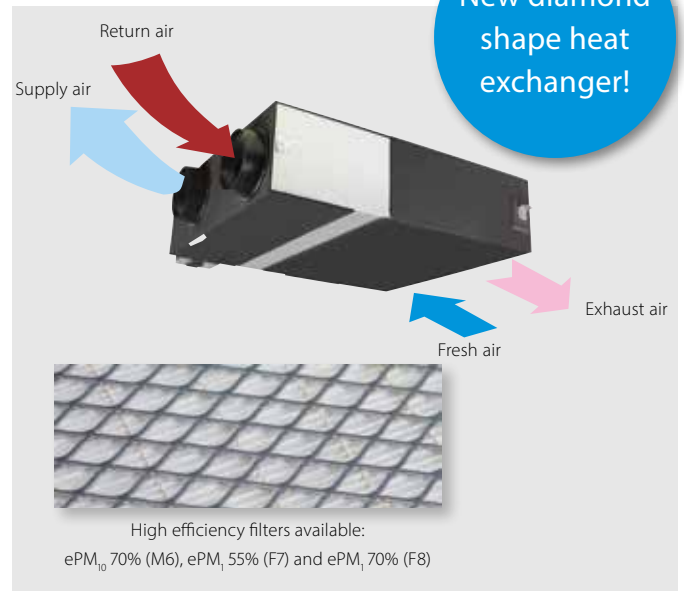

Ventilation				VAM/VAM	150FC	250FC	350J	500J	650J	800J	1000J	1500J	2000J
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.097/0.070 / 0.039	0.164/0.113/ 0.054	0.247/0.173/ 0.081	0.303/0.212/ 0.103	0.416/0.307/ 0.137	0.548/0.384/ 0.191	0.833/0.614/ 0.273
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.085/0.061/ 0.031	0.148/0.100/ 0.045	0.195/0.131/ 0.059	0.289/0.194/ 0.086	0.417/0.300/ 0.119	0.525/0.350/ 0.156	0.835/0.600/ 0.239
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	77.0 (1)/72.0 (2)/78.3 (1)/72.3 (2)/82.8 (1)/73.2 (2)	74.9 (1)/69.5 (2)/76.0 (1)/70.0 (2)/80.1 (1)/72.0 (2)	85.1/86.7/90.1	80.0/82.5/87.6	84.3/86.4/90.5	82.5/84.2/87.7	79.6/81.8/86.1	83.2/84.8/88.1	79.6/81.8/86.1
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	60.3 (1)/61.9 (1)/67.3 (1)	60.3 (1)/61.2 (1)/64.5 (1)	65.2/67.9/74.6	59.2/61.8/69.5	59.2/63.8/73.1	67.7/70.7/76.8	62.6/66.4/74.0	68.9/71.8/77.5	62.6/66.4/74.0
	Heating	Ultra high/High/Low		%	66.6 (1)/67.9 (1)/72.4 (1)	66.6 (1)/67.4 (1)/70.7 (1)	75.5/77.6/82.0	69.0/72.2/78.7	73.1/76.3/82.7	72.8/75.3/80.2	68.6/71.7/77.9	73.8/76.1/80.8	68.6/71.7/77.9
Operation mode					Heat exchange mode, bypass mode, fresh-up mode								
Heat exchange system					Air to air cross flow total heat (sensible + latent heat) exchange								
Heat exchange element					Specially processed non-flammable paper								
Dimensions	Unit	HeightxWidthxDepth		mm	285x776x525		301x1,113x886		368x1,354x920		368x1,354x1,172		731x1,354x1,172
Weight	Unit			kg	24.0		46.5		61.5		79.0		157
Casing	Material				Galvanised steel plate								
Fan	Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m³/h	150/140/105	250/230/155	350 (1)/300 (1)/200 (1)	500 (1)/425 (1)/275 (1)	650 (1)/550 (1)/350 (1)	800 (1)/680 (1)/440 (1)	1,000 (1)/850 (1)/550 (1)	1,500 (1)/1,275 (1)/825 (1)	2,000 (1)/1,700 (1)/1,100 (1)
		Bypass mode	Ultra high/High/Low	m³/h	150/140/105	250/230/155	350 (1)/300 (1)/200 (1)	500 (1)/425 (1)/275 (1)	650 (1)/550 (1)/350 (1)	800 (1)/680 (1)/440 (1)	1,000 (1)/850 (1)/550 (1)	1,500 (1)/1,275 (1)/825 (1)	2,000 (1)/1,700 (1)/1,100 (1)
	External static pressure - 50Hz	Ultra high/High/Low		Pa	90/87/40	70/63/25	90 (1)/70.0/50.0 (1)						
Air filter	Type				Multidirectional fibrous fleeces		Multidirectional fibrous fleeces (G3)						
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low		dBA	27.0/26.0/20.5	28.0/26.0/21.0	34.5 (1)/32.0 (1)/29.0 (1)	37.5 (1)/35.0 (1)/30.5 (1)	39.0 (1)/36.0 (1)/31.0 (1)	39.0 (1)/36.0 (1)/30.5 (1)	42.0 (1)/38.5 (1)/32.5 (1)	42.0 (1)/39.0 (1)/33.5 (1)	45.0 (1)/41.5 (1)/36.0 (1)
	Bypass mode	Ultra high/High/Low		dBA	27.0/26.5/20.5	28.0/27.0/21.0	34.5 (1)/32.0 (1)/28.0 (1)	38.0 (1)/35.0 (1)/29.5 (1)	38.0 (1)/34.5 (1)/30.5 (1)	40.0 (1)/36.5 (1)/30.5 (1)	42.5 (1)/40.0 (1)/32.5 (1)	42.0 (1)/39.0 (1)/32.5 (1)	45.0 (1)/41.0 (1)/35.0 (1)
Operation range	Around unit			°CDB	-		0°C~40°CDB, 80% RH or less						
Connection duct diameter				mm	100	150	200		250			2x250	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220								
Current	Maximum fuse amps (MFA)			A	15.0		16.0						
Specific energy consumption (SEC)	Cold climate			kWh/(m².a)	-56.0 (5)	-60.5 (5)	-						
	Average climate			kWh/(m².a)	-22.1 (5)	-27.0 (5)	-						
	Warm climate			kWh/(m².a)	-0.100 (5)	-5.30 (5)	-						
SEC class				D / See note 5 B / See note 5					-				
Maximum flow rate at 100 Pa ESP	Flow rate			m³/h	130	207	-						
	Electric power input			W	129	160	-						
Sound power level (Lwa)				dB	40	43	51	54	58		61	62	65
Annual electricity consumption				kWh/a	18.9 (5)	13.6 (5)	-						
Annual heating saved	Cold climate			kWh/a	41.0 (5)	40.6 (5)	-						
	Average climate			kWh/a	80.2 (5)	79.4 (5)	-						
	Warm climate			kWh/a	18.5 (5)	18.4 (5)	-						

(1) Measured according to JIS B 8628 | (2) Measured at reference flow rate according to EN13141-7 | Measured according to EN308 : 1997 | In accordance with commission regulation (EU) No 1254/2014 | In accordance with commission regulation (EU) No 1253/2014 | At reference flow rate in accordance with commission regulation (EU) No 1254/2014 | Clean the filter when the filter icon appears on the controller screen. Regular filter cleaning is important for delivered air quality and for the unit's energy efficiency.


# Energy reclaim ventilation, humidification and air processing

Pre heating or cooling of fresh air for lower load on the air conditioning system

- › Energy saving ventilation using indoor heating, cooling and moisture recovery
- › Creates a high quality indoor environment by pre conditioning incoming fresh air
- › Humidification of the incoming air results in comfortable indoor humidity level, even during heating
- › Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- › Low energy consumption thanks to DC fan motor
- › Prevent energy losses from over-ventilation while improving indoor air quality with optional CO2 sensor
- › Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- › Specially developed heat exchange element with High Efficiency Paper (HEP)
- › Can operate in over- and under pressure



Ventilation			VKM-GB/VKM-GBM		50GB	80GB	100GB	50GBM	80GBM	100GBM
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.170	0.330/0.280/0.192	0.410/0.365/0.230	0.270/0.230/0.170	0.330/0.280/0.192	0.410/0.365/0.230
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.140	0.330/0.280/0.192	0.410/0.365/0.230	0.270/0.230/0.170	0.330/0.280/0.192	0.410/0.365/0.230
Fresh air conditioning load	Cooling			kW	4.71 / 1.91 / 3.5	7.46 / 2.96 / 5.6	9.12 / 3.52 / 7.0	4.71 / 1.91 / 3.5	7.46 / 2.96 / 5.6	9.12 / 3.52 / 7.0
Temperature	Heating			kW	5.58 / 2.38 / 3.5	8.79 / 3.79 / 5.6	10.69 / 4.39 / 7.0	5.58 / 2.38 / 3.5	8.79 / 3.79 / 5.6	10.69 / 4.39 / 7.0
exchange efficiency - 50Hz	Ultra high/High/Low			%	76/76/77.5	78/78/79	74/74/76.5	76/76/77.5	78/78/79	74/74/76.5
Enthalpy exchange efficiency - 50Hz	Cooling		Ultra high/High/Low	%	64/64/67	66/66/68	62/62/66	64/64/67	66/66/68	62/62/66
	Heating		Ultra high/High/Low	%	67/67/69	71/71/73	65/65/69	67/67/69	71/71/73	65/65/69
Operation mode					Heat exchange mode / Bypass mode / Fresh-up mode					
Heat exchange system					Air to air cross flow total heat (sensible + latent heat) exchange					
Heat exchange element					Specially processed non-flammable paper					
Humidifier				System	-			Natural evaporating type		
Dimensions	Unit	HeightxWidthxDepth		mm	387x1,764x832	387x1,764x1,214		387x1,764x832	387x1,764x1,214	
Weight	Unit			kg	94	110	112	100	119	123
Casing	Material				Galvanised steel plate					
Fan-Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m³/h	500/500/440	750/750/640	950/950/820	500/500/440	750/750/640	950/950/820	
	Bypass mode	Ultra high/High/Low	m³/h	500/500/440	750/750/640	950/950/820	500/500/440	750/750/640	950/950/820	
Fan-External static pressure - 50Hz	Ultra high/High/Low			Pa	210/170/140	210/160/110	150/100/70	200/150/120	205/155/105	110/70/60
Air filter	Type				Multidirectional fibrous fleeces					
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low	dBA	39/37/35	41.5/39/37	41/39/36.5	38/36/34	40/37.5/35.5	40/38/35.5	
	Bypass mode	Ultra high/High/Low	dBA	40/38/35.5	41.5/39/37	41/39/36.5	39/36/34.5	41/38/36	41/39/35.5	
Operation range	Around unit		°CDB				0°C~40°CDB, 80% RH or less			
	Supply air		°CDB				-15°C~40°CDB, 80% RH or less			
	Return air		°CDB				0°C~40°CDB, 80% RH or less			
	On coil temperature	Cooling/Max./Heating/Min.	°CDB		-15/43			-15/43		
Refrigerant					Electronic expansion valve					
	Control Type				R-410A					
	GWP				2,087.5					
Connection duct diameter			mm	200	250		200		250	
Piping connections	Liquid	OD	mm				6.35			
	Gas	OD	mm				12.7			
	Water supply		mm			-		6.4		
	Drain		mm							
Power supply	Phase/Frequency/Voltage			Hz/V	PT3/4 external thread					
Current	Maximum fuse amps (MFA)			A	1~/50/220-240					
					15					

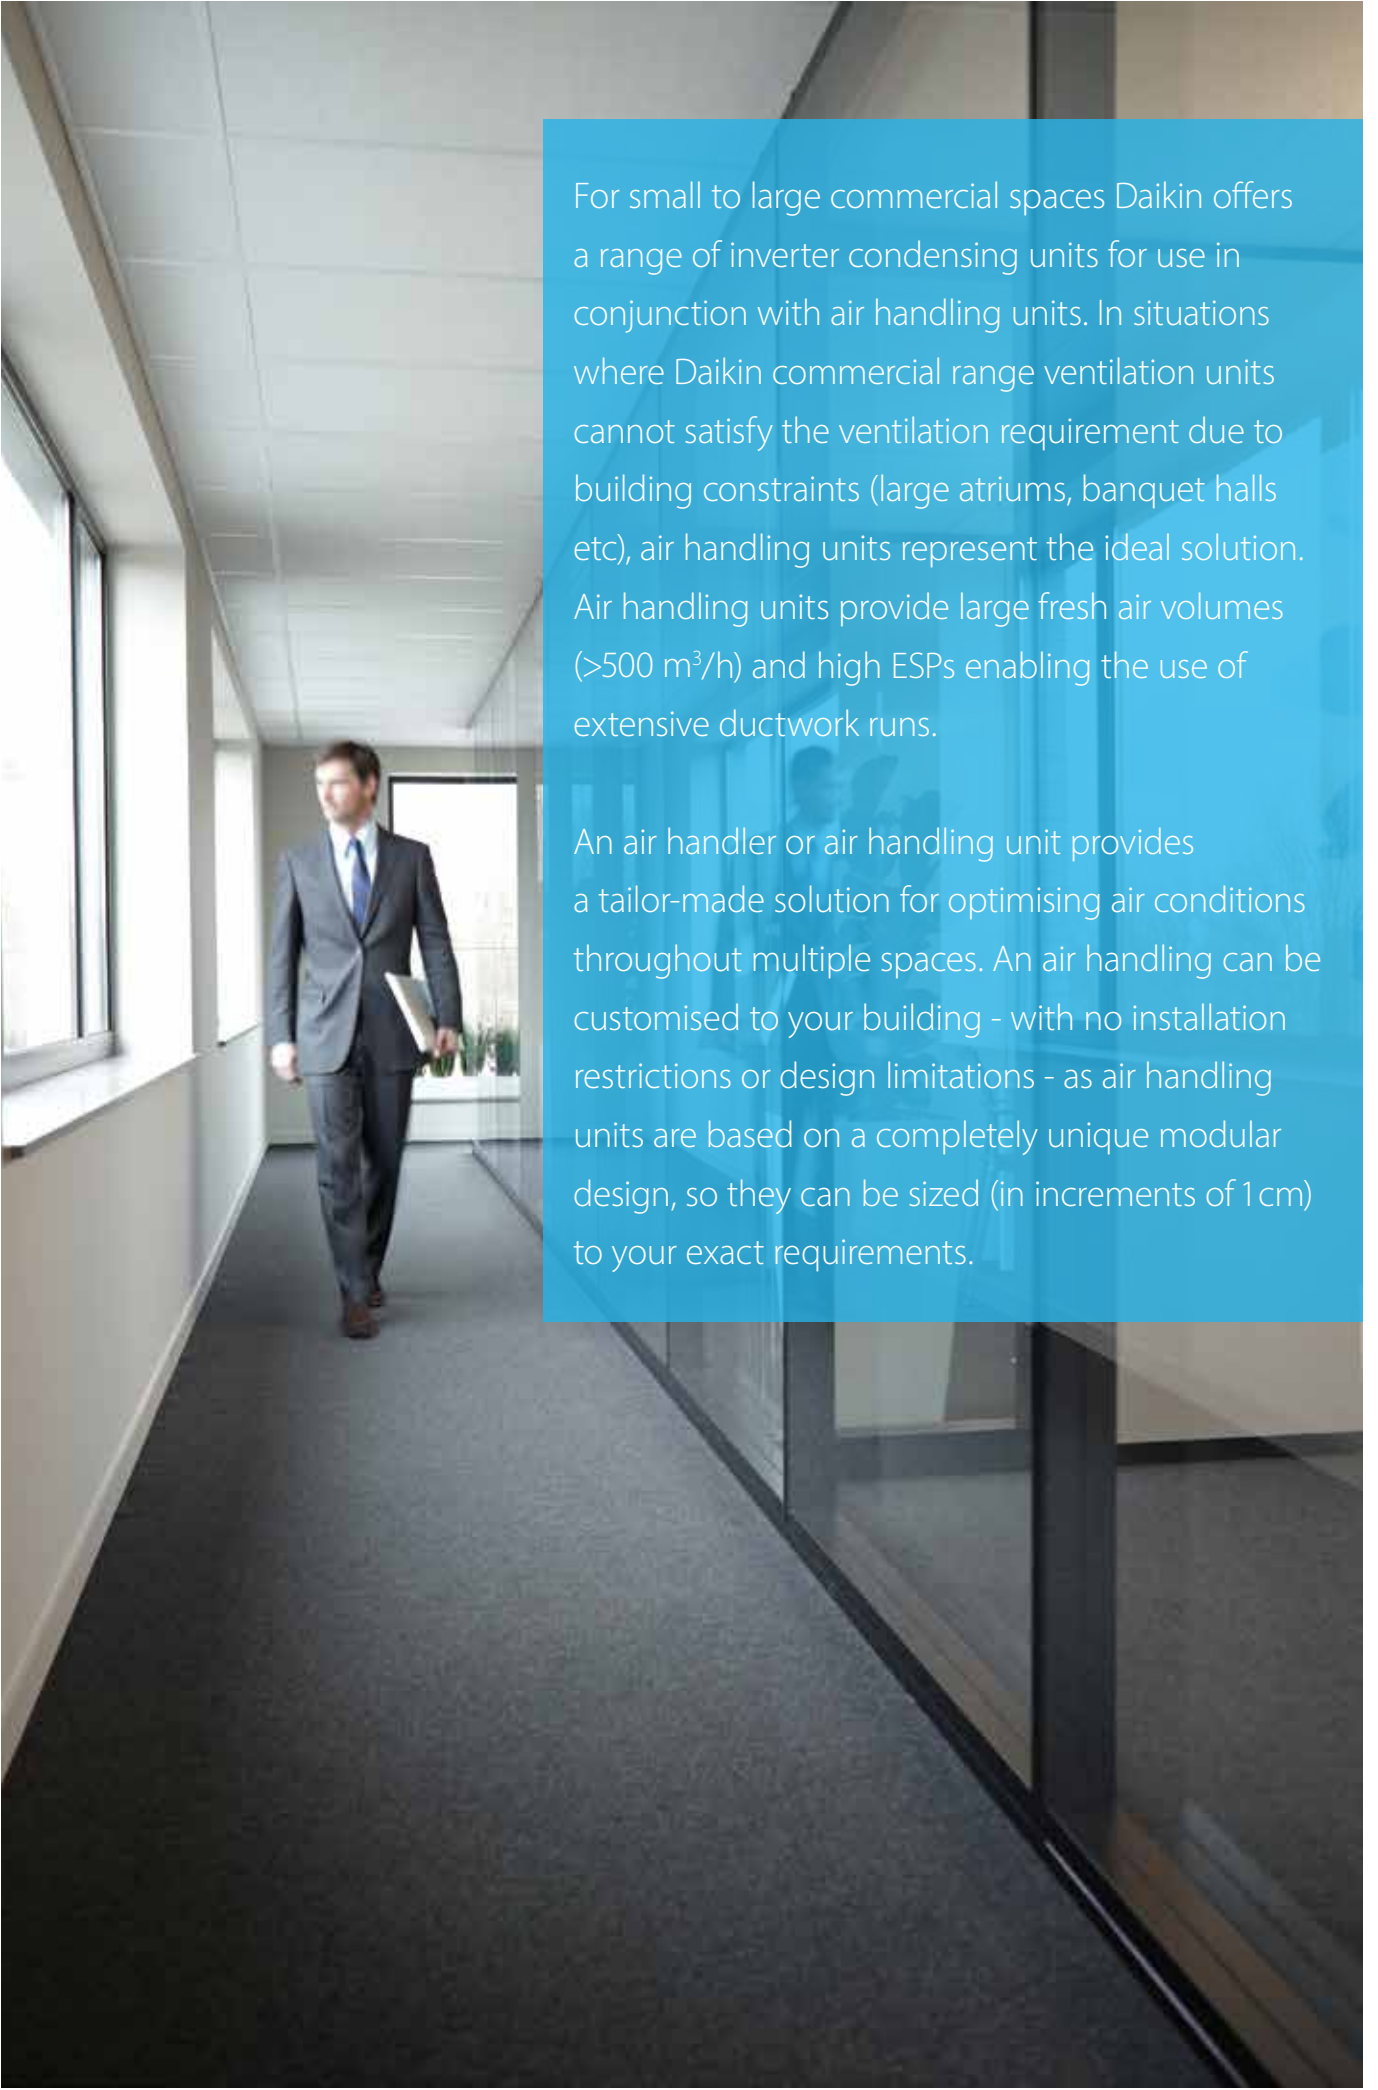

For small to large commercial spaces Daikin offers a range of inverter condensing units for use in conjunction with air handling units. In situations where Daikin commercial range ventilation units cannot satisfy the ventilation requirement due to building constraints (large atriums, banquet halls etc), air handling units represent the ideal solution. Air handling units provide large fresh air volumes (>500 m<sup>3</sup>/h) and high ESPs enabling the use of extensive ductwork runs.

An air handler or air handling unit provides a tailor-made solution for optimising air conditions throughout multiple spaces. An air handling can be customised to your building - with no installation restrictions or design limitations - as air handling units are based on a completely unique modular design, so they can be sized (in increments of 1 cm) to your exact requirements.

# Daikin

# air handling units



## Air handling unit applications

Why choose Daikin air handling units with a DX connection?	30
Why use VRV and ERQ condensing units for connection to air handling units?	32
In order to maximise installation flexibility, 4 types of control systems are offered	33
VRV - for larger capacities (from 8 to 54HP)	34
ERQ - for smaller capacities (from 100 to 250 class)	35
Integration of VRV and ERQ in third party air handling units	36
Pair and multi application selection	37

# Daikin air handling units solutions

You will find your match

## Why choose Daikin air handling units with a DX connection?



### Simplifying business

The unique total solution approach by Daikin helps businesses to propose better cross-pillar solutions, to increase their success ratio by providing unmatched product combinations to the end-user and to simplify the life of installers by supplying high-quality products coming from the same manufacturer. Contrary to other manufacturers, Daikin does not use OEM products in its AHU with DX offer. Many competitors are either offering OEM DX outdoor units or OEM AHU which create additional problems when warranties or faults arise. **Having a single interface for your business makes Daikin the right choice.**

### One stop shop

Daikin is the only global manufacturer in the market **capable of offering a true Plug & Play solution** where Daikin AHUs manufactured by Daikin Applied Europe and certified by Eurovent, offer off-the-shelf compatibility with Daikin's unique VRV outdoor unit range for the best performance in the market. This unique integration of cross-pillar products under the same umbrella, gives the customer both peace-of-mind and added value when promoting a total solution approach.

### Complete range of possibilities

Thanks to the **most complete offer in the market**, Daikin has the solution for all types of commercial applications requiring fresh air. Daikin provides ventilation solutions based on AHU from 2,500 m<sup>3</sup>/h up to 140,000 m<sup>3</sup>/h either with natural heat recovery or more advanced ventilation solutions where a VRV outdoor unit can be connected to the Daikin AHU for ultimate climate control. The harmonized control between the VRV outdoor unit and the AHU offer outstanding 24h/7 control of the system when connected to an iTM.

## Advantages

- › Unique manufacturer offering a complete range
- › Plug & Play solution
- › Direct iTM compatibility

# Daikin's fresh air solution



High efficient EC fan



Factory fitted and tested DX heat exchanger



Efficient filtration




Heat wheel for heat recovery

## Why use VRV and ERQ condensing units for connection to air handling units?

### High Efficiency

Daikin heat pumps are renowned for their high energy efficiency. Integrating the AHU with a heat recovery system is even more effective since an office system can frequently be in cooling mode

while the outdoor air is too cold to be brought inside in an unconditioned state. In this case heat from the offices is merely transferred to heat up the cold incoming fresh air.

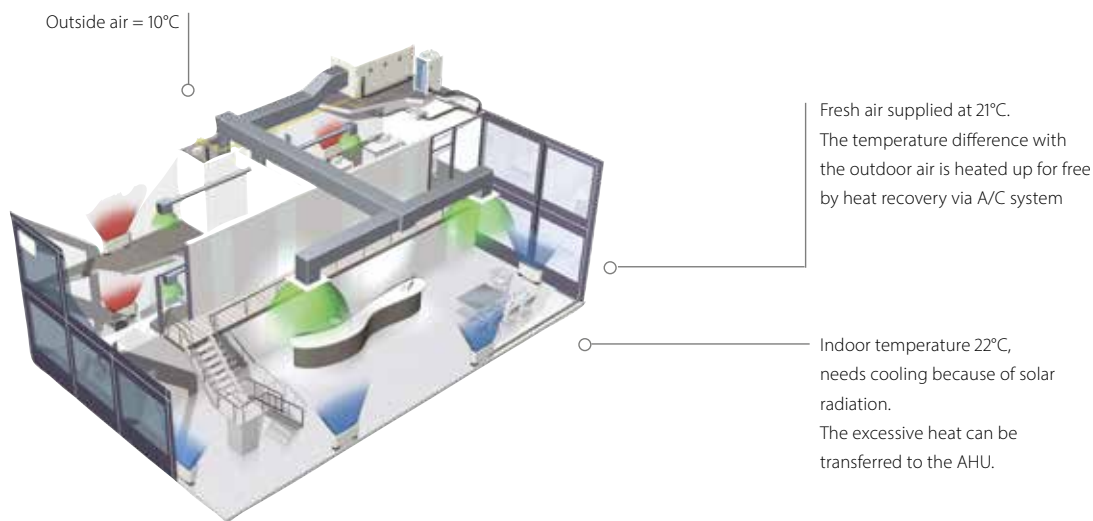

### Fast response to changing loads resulting in high comfort levels


Daikin ERQ and VRV units respond rapidly to fluctuations in supply air temperature, resulting in a steady indoor temperature and resultant high comfort levels for the end user. The ultimate is the VRV range which improves comfort even more by offering continuous heating, also during defrost.

### Easy Design and Installation

The system is easy to design and install since no additional water systems such as boilers, tanks and gas connections etc. are required. This also reduces both the total system investment and running cost.

### Daikin Fresh air package

- › Plug & Play connection between VRV/ERQ and the entire D-AHU modular range.
- › Factory fitted and welded control and expansion valve kits.

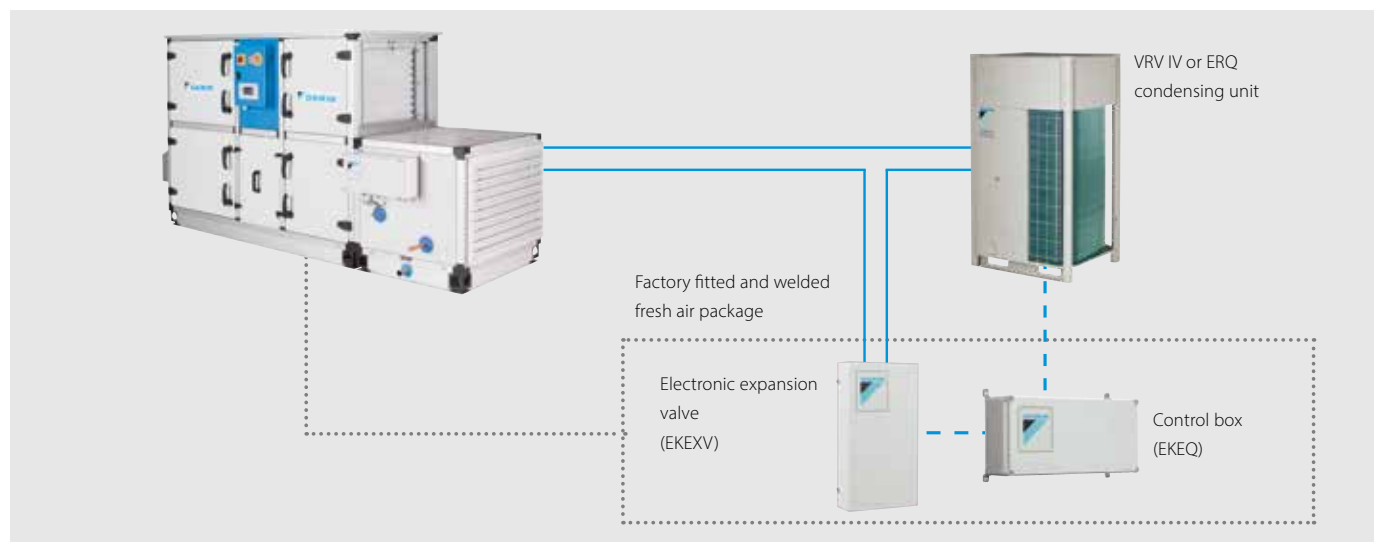

## In order to maximise installation flexibility, 4 types of control systems are offered

**W control:** Off the shelf control of air temperature (discharge temperature, suction temperature, room temperature) via any DDC controller, easy to setup

**X control:** Precise control of air temperature (discharge temperature, suction temperature, room temperature) requiring a preprogrammed DDC controller (for special applications)


**Z control:** Control of air temperature (suction temperature, room temperature) via Daikin control (no DDC controller needed)

**Y control:** Control of refrigerant ( $T_e/T_c$ ) temperature via Daikin control (no DDC controller needed)

### 1. W control ( $T_s/T_r/T_{ROOM}$ control):

#### Air temperature control via DDC controller


Room temperature is controlled as a function of the air handling unit suction or discharge air (customer selection). The DDC controller is translating the temperature difference between set point and air suction temperature (or air discharge temperature or room temperature) into a proportional 0-10V signal which is transferred to the Daikin control box (EKEQFCBA). This voltage modulates the capacity requirements of the outdoor unit.

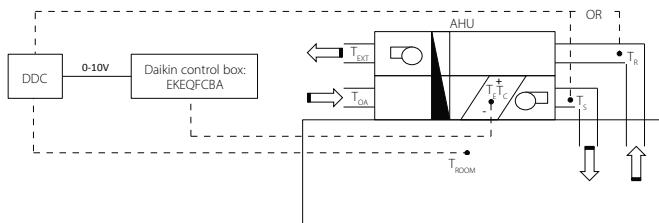

### 2. X control ( $T_s/T_r/T_{ROOM}$ control):

#### Precise air temperature control via DDC controller


Room temperature is controlled as a function of the air handling unit suction or discharge air (customer selection). The DDC controller is translating the temperature difference between set point and air suction temperature (or air discharge temperature or room temperature) into a reference voltage (0-10V) which is transferred to the Daikin control box (EKEQFCBA). This reference voltage will be used as the main input value for the compressor frequency control.

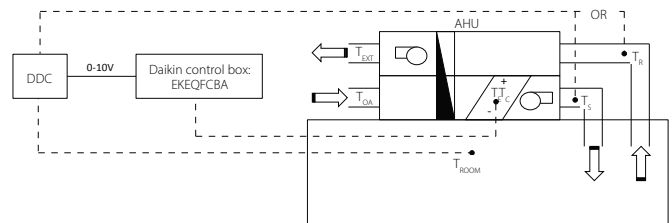

### 3. Y control ( $T_e/T_c$ control):

#### By fixed evaporating /condensing temperature


A fixed target evaporating or condensing temperature can be set by the customer. In this case, room temperature is only indirectly controlled. A Daikin wired remote control (BRC1\* - optional) have to be connected for initial set-up but not required for operation.

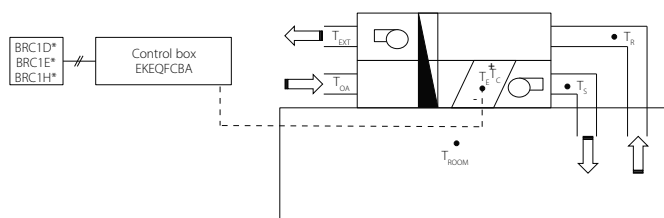

### 4. Z control ( $T_s/T_{ROOM}$ control):

#### Control your AHU just like a VRV indoor unit with 100% fresh air

Allows the possibility to control the AHU just like a VRV indoor unit. Meaning temperature control will be focused on return air temperature from the room into the AHU. Requires BRC1\* for operation. The only control that allows the combination of other indoor units to the AHU at the same time.

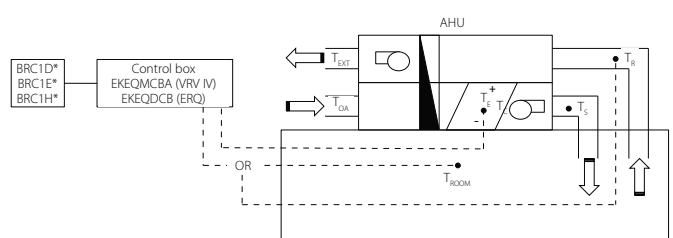

$T_s$ = Supply air temperature	$T_r$ = Return air temperature	$T_{OA}$ = Outdoor air temperature	$T_{ROOM}$ = Room air temperature
$T_{EXT}$ = Extraction air temperature	$T_e$ = Evaporating temperature	$T_c$ = Condensing temperature	

	Option kit	Features
Possibility W	EKEQFCBA	Off-the-shelf DDC controller that requires no pre-configuration
Possibility X		Pre-configured DDC controller required
Possibility Y		Using fixed evaporating temperature, no set point can be set using remote control
Possibility Z	EKEQDCB EKFQMCBA*	Using Daikin infrared remote control BRC1* Temperature control using air suction temperature or room temperature (via remote sensor)


\* EKEQMCB (for 'multi' application)

## **VRV** - for larger capacities (from 8 to 54HP)


### An advanced solution for both pair and multi application

- › Inverter controlled units
- › Heat recovery, heat pump
- › R-410A
- › Control of room temperature via Daikin control
- › Large range of expansion valve kits available
- › BRC1H519W/S/K is used to set the set point temperature (connected to the EKEQMCBA).
- › Connectable to all VRV heat recovery and heat pump systems

#### W, X, Y control for VRV IV heat pump

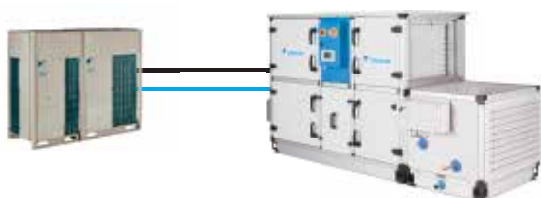

#### Z control for all VRV outdoor units

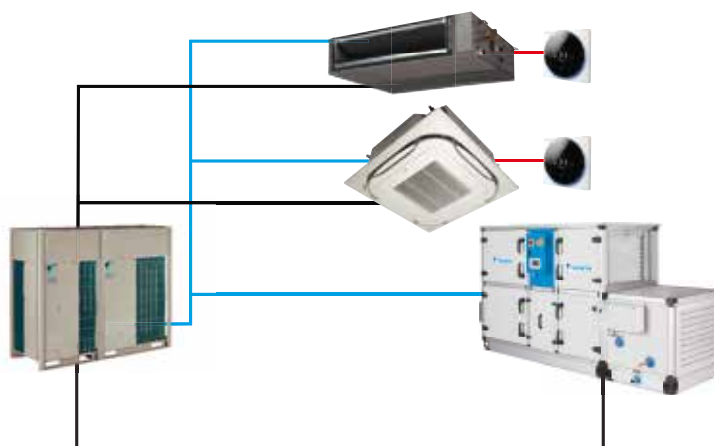

- Refrigerant piping
- F1-F2
- P1-P2



## ERQ - for smaller capacities (from 100 to 250 class)

### A basic fresh air solution for pair application

- › Inverter controlled units
- › Heat pump
- › R-410A
- › Wide range of expansion valve kits available
- › Perfect for the Daikin Modular air handling unit

The "Daikin Fresh Air Package" provides a complete Plug & Play Solution including AHU, ERQ or VRV Condensing Unit and all unit control (EKEQ, EKEX, DDC controller) factory mounted and configured. The easiest solution with only one point of contact.



Ventilation				ERQ	100AV1	125AV1	140AV1
Capacity range				HP	4	5	6
Cooling capacity	Nom.			kW	11.2	14.0	15.5
Heating capacity	Nom.			kW	12.5	16.0	18.0
Power input	Cooling	Nom.		kW	2.81	3.51	4.53
	Heating	Nom.		kW	2.74	3.86	4.57
EER						3.99	3.42
COP					4.56	4.15	3.94
Dimensions	Unit	HeightxWidthxDepth	mm		1,345x900x320		
Weight	Unit		kg		120		
Casing	Material				Painted galvanized steel plate		
Fan-Air flow rate	Cooling	Nom.	m <sup>3</sup> /min		106		
	Heating	Nom.	m <sup>3</sup> /min		102	105	
Sound power level	Cooling	Nom.	dBA		66	67	69
Sound pressure level	Cooling	Nom.	dBA		50	51	53
	Heating	Nom.	dBA		52	53	55
Operation range	Cooling	Min./Max.	°CDB		-5/46		
	Heating	Min./Max.	°CWB		-20/15.5		
	On coil temperature	Heating/Min./Cooling/Max.	°CDB		10/35		
Refrigerant	Type				R-410A		
	Charge		kg		4.0		
			TCO <sub>2</sub> eq		8.4		
	GWP				2,087.5		
	Control				Expansion valve (electronic type)		
Piping connections	Liquid	OD	mm		9.52		
	Gas	OD	mm		15.9		19.1
	Drain	OD	mm		26x3		
Power supply	Phase/Frequency/Voltage		Hz/V		1N~/50/220-240		
Current	Maximum fuse amps (MFA)		A		32.0		

Ventilation				ERQ	125AW1	200AW1	250AW1
Capacity range				HP	5	8	10
Cooling capacity	Nom.			kW	14.0	22.4	28.0
Heating capacity	Nom.			kW	16.0	25.0	31.5
Power input	Cooling	Nom.		kW	3.52	5.22	7.42
	Heating	Nom.		kW	4.00	5.56	7.70
EER					3.98	4.29	3.77
COP					4.00	4.50	4.09
Dimensions	Unit	HeightxWidthxDepth	mm		1,680x635x765	1,680x930x765	
Weight	Unit		kg		159	187	240
Casing	Material				Painted galvanized steel plate		
Fan-Air flow rate	Cooling	Nom.	m <sup>3</sup> /min		95	171	185
	Heating	Nom.	m <sup>3</sup> /min		95	171	185
Sound power level	Nom.		dBA		72	78	
Sound pressure level	Nom.		dBA		54		58
Operation range	Cooling	Min./Max.	°CDB		-5/43		
	Heating	Min./Max.	°CWB		-20/15		
	On coil temperature	Heating/Min./Cooling/Max.	°CDB		10/35		
Refrigerant	Type				R-410A		
	Charge		kg		6.2	7.7	8.4
			TCO <sub>2</sub> eq		12.9	16.1	17.5
	GWP				2,087.5		
	Control				Electronic expansion valve		
Piping connections	Liquid	OD	mm		9.52		
	Gas	OD	mm		15.9	19.1	22.2
Power supply	Phase/Frequency/Voltage		Hz/V		3N~/50/400		
Current	Maximum fuse amps (MFA)		A		16	25	

# Integration of ERQ and VRV in third party air handling units

a wide range of expansion valve kits and control boxes

## Combination table

		Control box			Expansion valve kit										Mixed connection with VRV indoor units
		EKEQDCB	EKEQFCBA	EKEQMCBA	EKE XV50	EKE XV63	EKE XV80	EKE XV100	EKE XV125	EKE XV140	EKE XV200	EKE XV250	EKE XV400	EKE XV500	
		Z control	W,X,Y control	Z control	-	-	-	-	-	-	-	-	-	-	
1-phase	ERQ100	P	P	-	-	P	P	P	P	-	-	-	-	-	Not possible
	ERQ125	P	P	-	-	P	P	P	P	P	-	-	-	-	
	ERQ140	P	P	-	-	-	P	P	P	P	-	-	-	-	
3-phase	ERQ125	P	P	-	-	P	P	P	P	P	-	-	-	-	
	ERQ200	P	P	-	-	-	-	P	P	P	P	P	-	-	
	ERQ250	P	P	-	-	-	-	-	P	P	P	P	-	-	
VRV III		-	-	n1	n1	n1	n1	n1	n1	n1	n1	n1	n1	n1	Mandatory
VRV IV H/P / VRV IV W-series VRV IV S-series		-	P (1 -> 3)	n2	n2	n2	n2	n2	n2	n2	n2	n2	n2	n2	Possible (not mandatory)
VRV IV H/R VRV IV i-series		-	n1	-	n1	n1	n1	n1	n1	n1	n1	n1	n1	n1	Mandatory

- P (pair application): combination depends on the capacity of the air handling unit.
- n1 (multi application) - Combination of AHUs and VRV DX indoors (mandatory). To determine the exact quantity please refer to the engineering data book.
- n2 (multi application) - Combination of AHUs and VRV DX indoors (not mandatory). To determine the exact quantity please refer to the engineering data book.
- Control box EKEQFA can be connected to some types of VRV IV outdoor units (with a maximum of 3 boxes per unit). Do not combine EKEQFA control boxes with VRV DX indoor units, RA indoor units or hydroboxes.

## Capacity table

### Cooling

EKE XV Class	Allowed heat exchanger capacity (kW)			Allowed heat exchanger volume (dm <sup>3</sup> )	
	Minimum	Standard	Maximum	Minimum	Maximum
50	5.0	5.6	6.2	1.33	1.65
63	6.3	7.1	7.8	1.66	2.08
80	7.9	9.0	9.9	2.09	2.64
100	10.0	11.2	12.3	2.65	3.30
125	12.4	14.0	15.4	3.31	4.12
140	15.5	16.0	17.6	4.13	4.62
200	17.7	22.4	24.6	4.63	6.60
250	24.7	28.0	30.8	6.61	8.25
400	35.4	45.0	49.5	9.26	13.2
500	49.6	56.0	61.6	13.2	16.5

Saturated evaporating temperature: 6°C  
Air temperature: 27°C DB / 19°C WB

### Heating

EKE XV Class	Allowed heat exchanger capacity (kW)			Allowed heat exchanger volume (dm <sup>3</sup> )	
	Minimum	Standard	Maximum	Minimum	Maximum
50	5.6	6.3	7.0	1.33	1.65
63	7.1	8.0	8.8	1.66	2.08
80	8.9	10.0	11.1	2.09	2.64
100	11.2	12.5	13.8	2.65	3.30
125	13.9	16.0	17.3	3.31	4.12
140	17.4	18.0	19.8	4.13	4.62
200	19.9	25.0	27.7	4.63	6.60
250	27.8	31.5	34.7	6.61	8.25
400	39.8	50.0	55.0	9.26	13.2
500	55.1	63.0	69.3	13.2	16.5

Saturated condensing temperature: 46°C  
Air temperature: 20°C DB

## EKE XV - Expansion valve kit for air handling applications

Ventilation		EKE XV	50	63	80	100	125	140	200	250	400	500
Dimensions	Unit	mm	401x215x78									
Weight	Unit	kg	2.9									
Sound pressure level	Nom.	dBA	45									
Operation range	On coil	Heating Min.	10 (1)									
	temperature	Cooling Max.	35 (2)									
Refrigerant	Type / GWP		R-410A / 2.087,5									
Piping connections	Liquid	OD	mm	6.35	9.52						12.7	15.9

(1) The temperature of the air entering the coil in heating mode can be reduced to -5°CDB. Contact your local dealer for more information. (2) 45% Relative humidity.

## EKEQ - Control box for air handling applications

Ventilation			EKEQ	FCBA	DCB	MCBA
Application				See note	Pair	Multi
Outdoor unit				ERQ / VRV	ERQ	VRV
Dimensions	Unit	mm	132x400x200			
Weight	Unit	kg	3.9		3.6	
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/230	

The combination of EKEQFCBA and ERQ is in pair application. The EKEQFCBA can be connected to some type of VRV IV outdoor units with a maximum of 3 control boxes. The combination with DX indoor units, hydroboxes, RA outdoor units, ... is not allowed. Refer to the combination table drawing of the outdoor unit for details.

## Pair application selection

- › **the outdoor unit is connected to ONE COIL (with single circuit or maximum 3 interlaced circuits) using up to 3 control boxes**
- › **indoor unit combination is not allowed**
- › **only works with X, W, Y control**

### Step 1: Required AHU capacity

An AHU with double flow, heat recovery and 100% fresh air is to be installed in Europe where the outdoor sizing temperature is 35 °CDB and the target supply air temperature for fresh air is 25 °CDB. Load calculations point to a required capacity of 45kW. By checking on the EKEXV capacity table, for cooling operation, 40kW falls within the 400 class valve. Since 40kW is not the nominal capacity, a class adjustment has to be done.  $40/45=0,89$  and  $0,89 \times 400=356$ . So the capacity class of the expansion valve kit is 356.

### Step 2: Outdoor unit selection

For this AHU, a VRV IV heat pump model with continuous heating is going to be used (RYYQ-T series). For a capacity of 40kW at 35 °CDB, an outdoor of 14HP (RYYQ14T) is selected. The capacity class of the 14 HP outdoor unit is 350.

Total connection ratio of the system is  $356/350=102\%$  hence it falls within the range 90-110%.

### Step 3: Control box selection

In this particular case, the control will work with precise air temperature control. Only W or X control allow this. Since the consultant wants to use an "off-the-shelf" DDC module, the EKEQFCBA box with W control allows easy set-up due to pre-set factory values.

## Multi application selection

- › **the outdoor unit can be connected to MULTIPLE COILS (and their control boxes)**
- › **indoor units are also connectable but not mandatory**
- › **only works with Z control**

### Step 1: Required AHU capacity

An AHU with double flow, heat recovery and 100% fresh air is to be installed in Europe where the outdoor sizing temperature is 35 °CDB and the target supply air temperature for fresh air is 25 °CDB. On top of this, for this building, 5 round-flow cassette units FXFQ50A will also be connected to this OU. Load calculations point to a required capacity of 20kW for the AHU and 22,5 kW for the indoor units. By checking on the EKEXV capacity table, for cooling operation, 20kW falls within the 200 class valve. Since 22,4 kW is the nominal capacity, a class adjustment has to be done.  $20/22,4=0,89$  and  $0,89 \times 200=178$ . So the capacity class of the expansion valve kit is 178. Total capacity class of the indoor unit system is  $178+250=428$

### Step 2: Outdoor unit selection


For this system where a AHU is connected with indoor units, it is mandatory to use a heat recovery unit. By consulting the engineering databook for REYQ-T, the total required capacity of 42,5 kW requires a 16HP model REYQ16T. Which will deliver 45kW at the design temperature of 35 °CDB. This unit has a capacity class of 400. Total connection ratio of the system is  $428/400=107\%$  hence it falls within the range 50-110%.

### Step 3: Control box selection

In this particular case, the only available control is Z control and the combination of AHU and VRV DX indoor units requires EKEQMCBA control box.

## Pair application examples

### Pair application layout #1: Example for W or X control with EKEQFCBA box

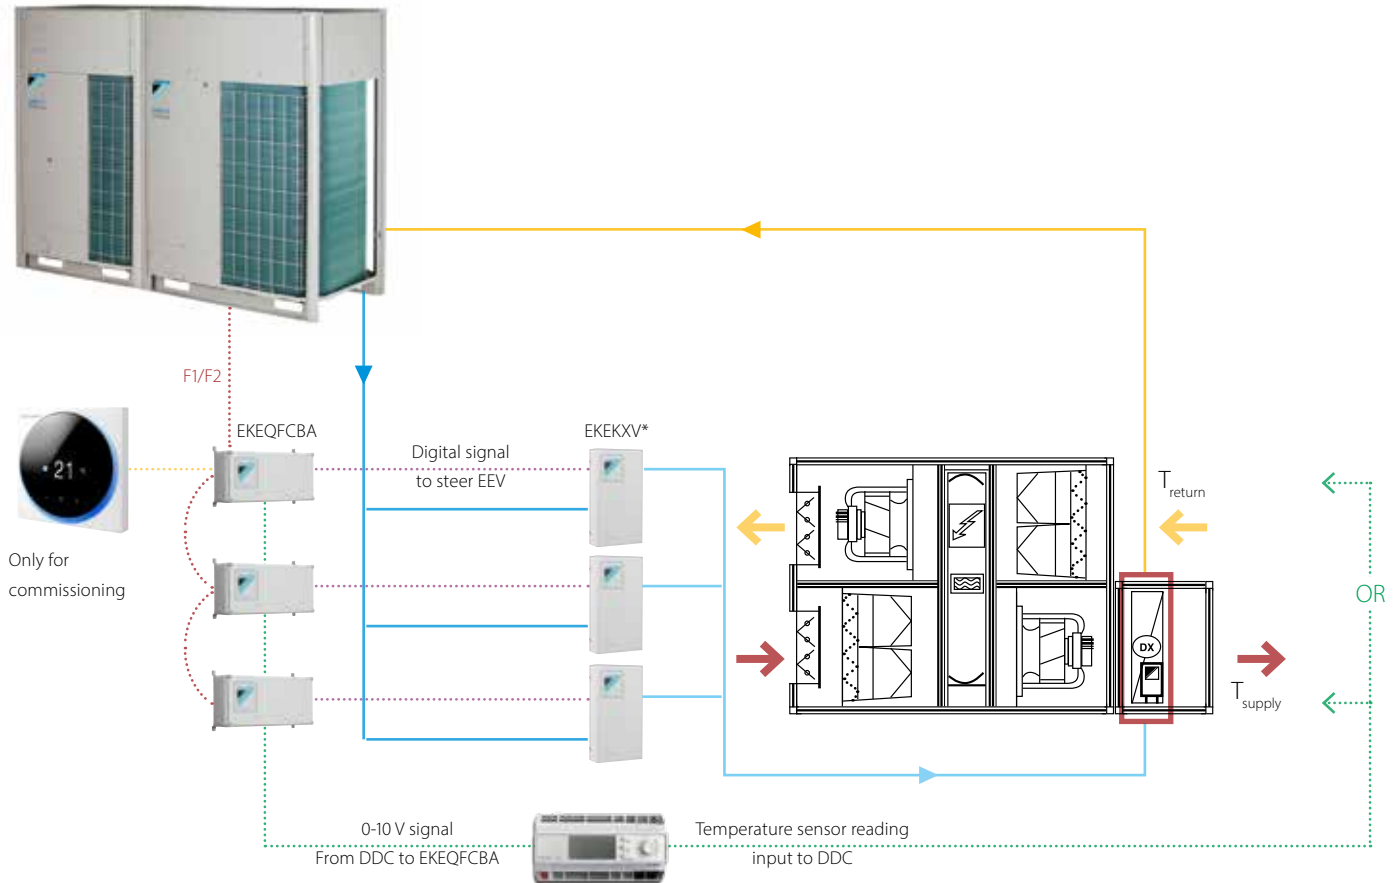

### Outdoor unit compatibility

RYYQ8T > RYYQ54T

RXYQ8T > RXYQ54T

RWEYQ8T9 > RWEYQ30T9

ERQ100 > ERQ250<sup>1</sup>

(1) Only available in 1 to 1 combination

### Connection restrictions




Connection Ratio VRV: between 90-110%

Connection Ratio ERQ: between 50-110%


$$CR = \frac{\sum IU CC}{\sum OU CC} = \frac{\sum (CF \times EKEKXV CC)_{1-3}}{\sum OU CC}$$

CF is the correction factor

CC is the capacity class

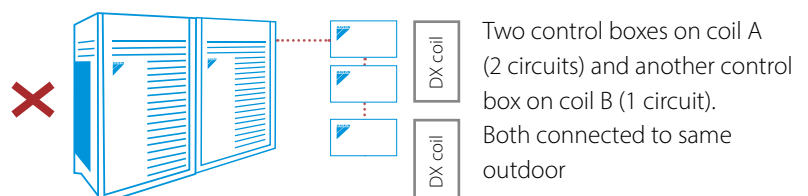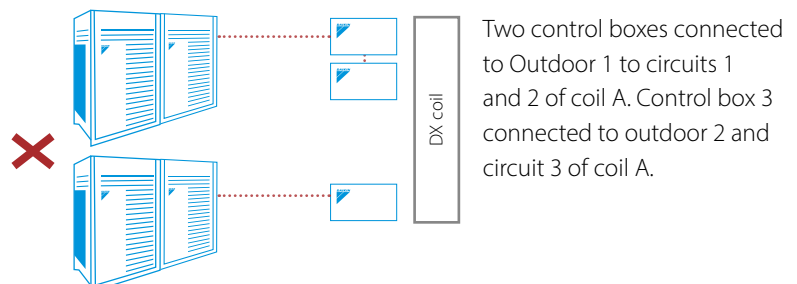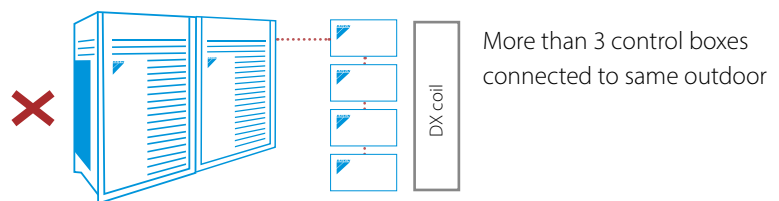

## Pair application layout #2: Example for Y control with EKEQFCBA box

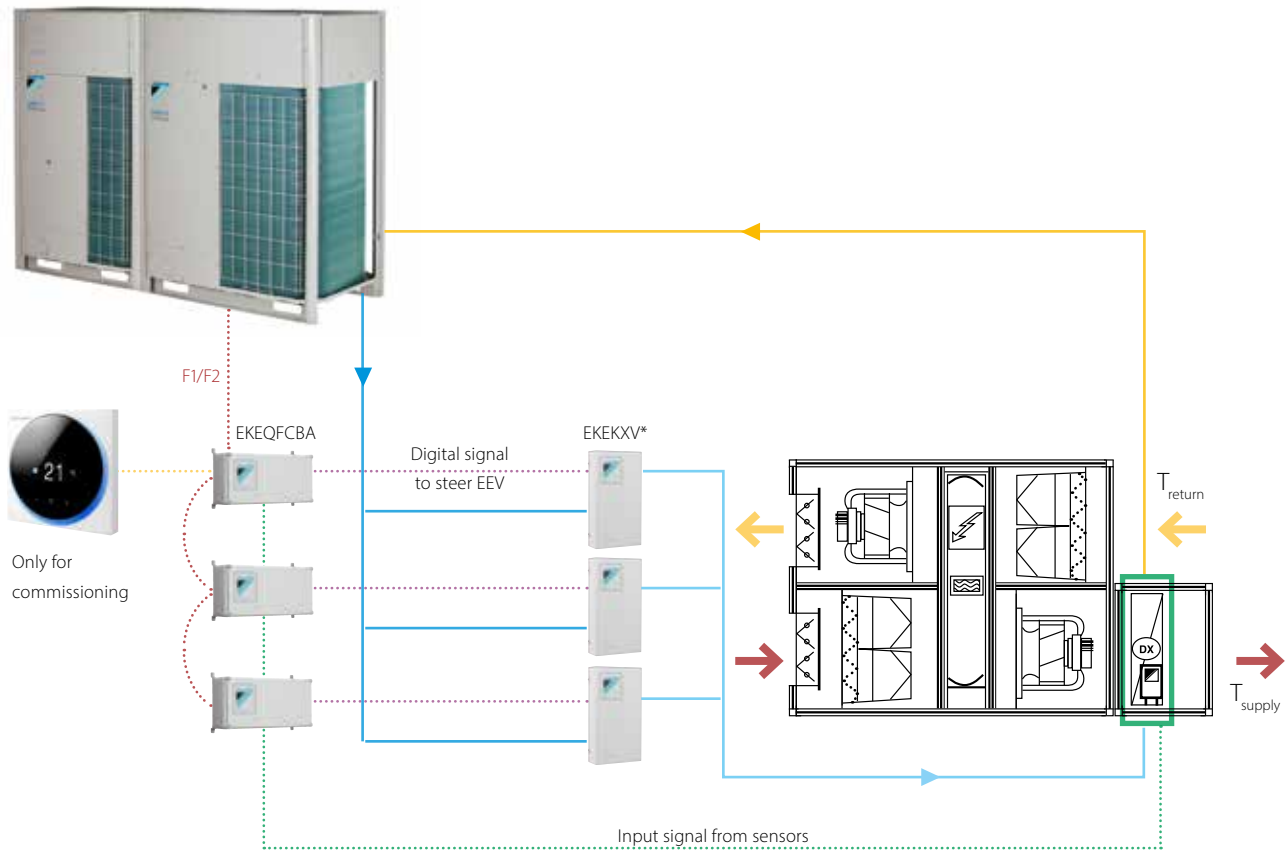

## Outdoor unit compatibility

RYYQ8T &gt; RYYQ54T

RXYQ8T &gt; RXYQ54T

RWEYQ8T9 &gt; RWEYQ30T9

ERQ100 > ERQ250<sup>1</sup>

(1) Only available in 1 to 1 combination

## Connection restrictions




Connection Ratio between 90-110%

Connection Ratio ERQ: between 50-110%

$$CR = \frac{\sum IU CC}{\sum OU CC} = \frac{\sum (CF \times EKEKXV CC)_{1-3}}{\sum OU CC}$$


CF is the correction factor

CC is the capacity class

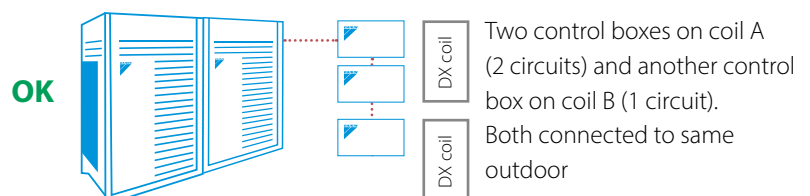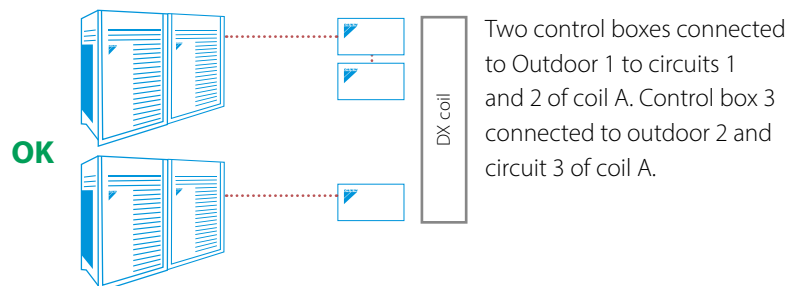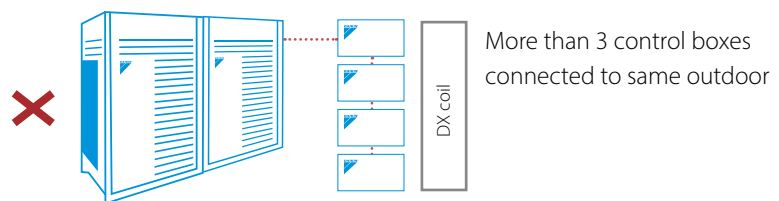

## Multi application examples

### Multi application layout #1: Example for Z control with EKEQMCBA box and no VRV indoor units

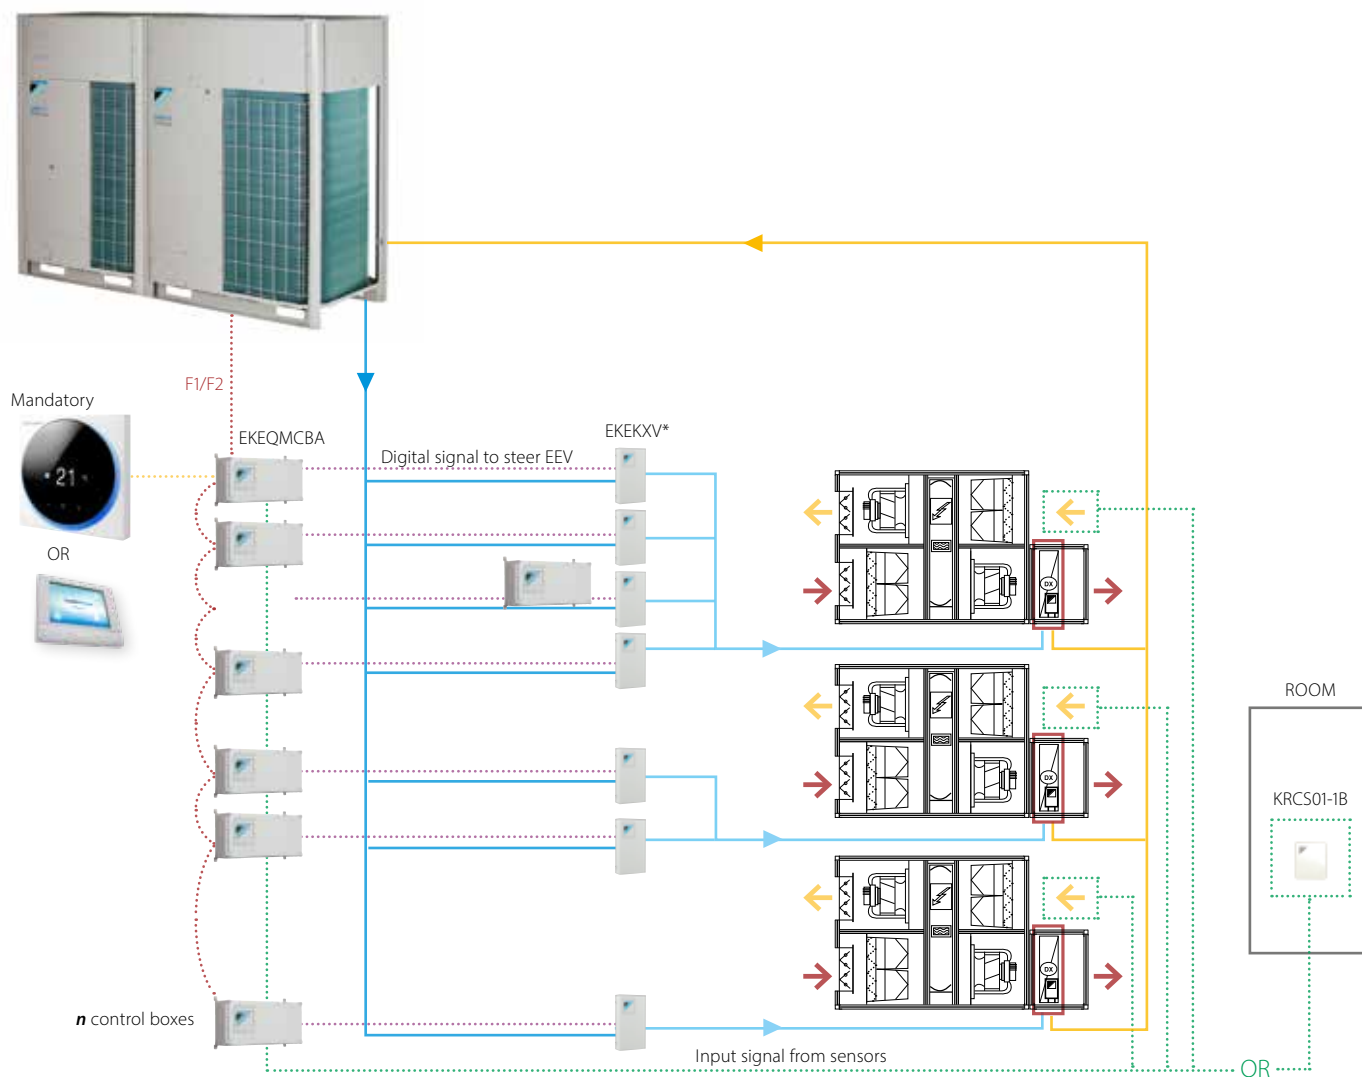

#### Outdoor unit compatibility

RYYQ8T > RYYQ54T

RXYQ8T > RXYQ54T

RWEYQ8T9 > RWEYQ30T9

EKEQMCBA control box

ERQ100 > ERQ250<sup>1</sup>

EKEQDCB control box

(1) Only available in 1 to 1 combination

#### Connection restrictions


Connection Ratio between 90-110%

Connection Ratio ERQ: between 50-110%


$$CR = \frac{\sum IU CC}{\sum OU CC} = \frac{\sum (CF \times EKEV CC)_{1-n}}{\sum OU CC}$$

CF is the correction factor


CC is the capacity class



More than 3 control boxes connected to same outdoor

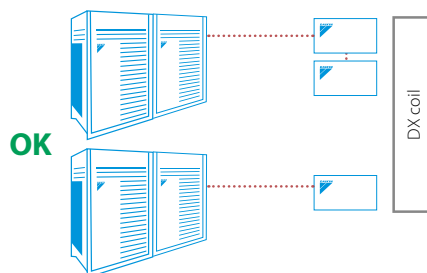


Two control boxes connected to Outdoor 1 to circuits 1 and 2 of coil A. Control box 3 connected to outdoor 2 and circuit 3 of coil A.



Two control boxes on coil A (2 circuits) and another control box on coil B (1 circuit). Both connected to same outdoor

## Multi application layout #2: Example for Z control with EKEQMCBA box and VRV indoor units

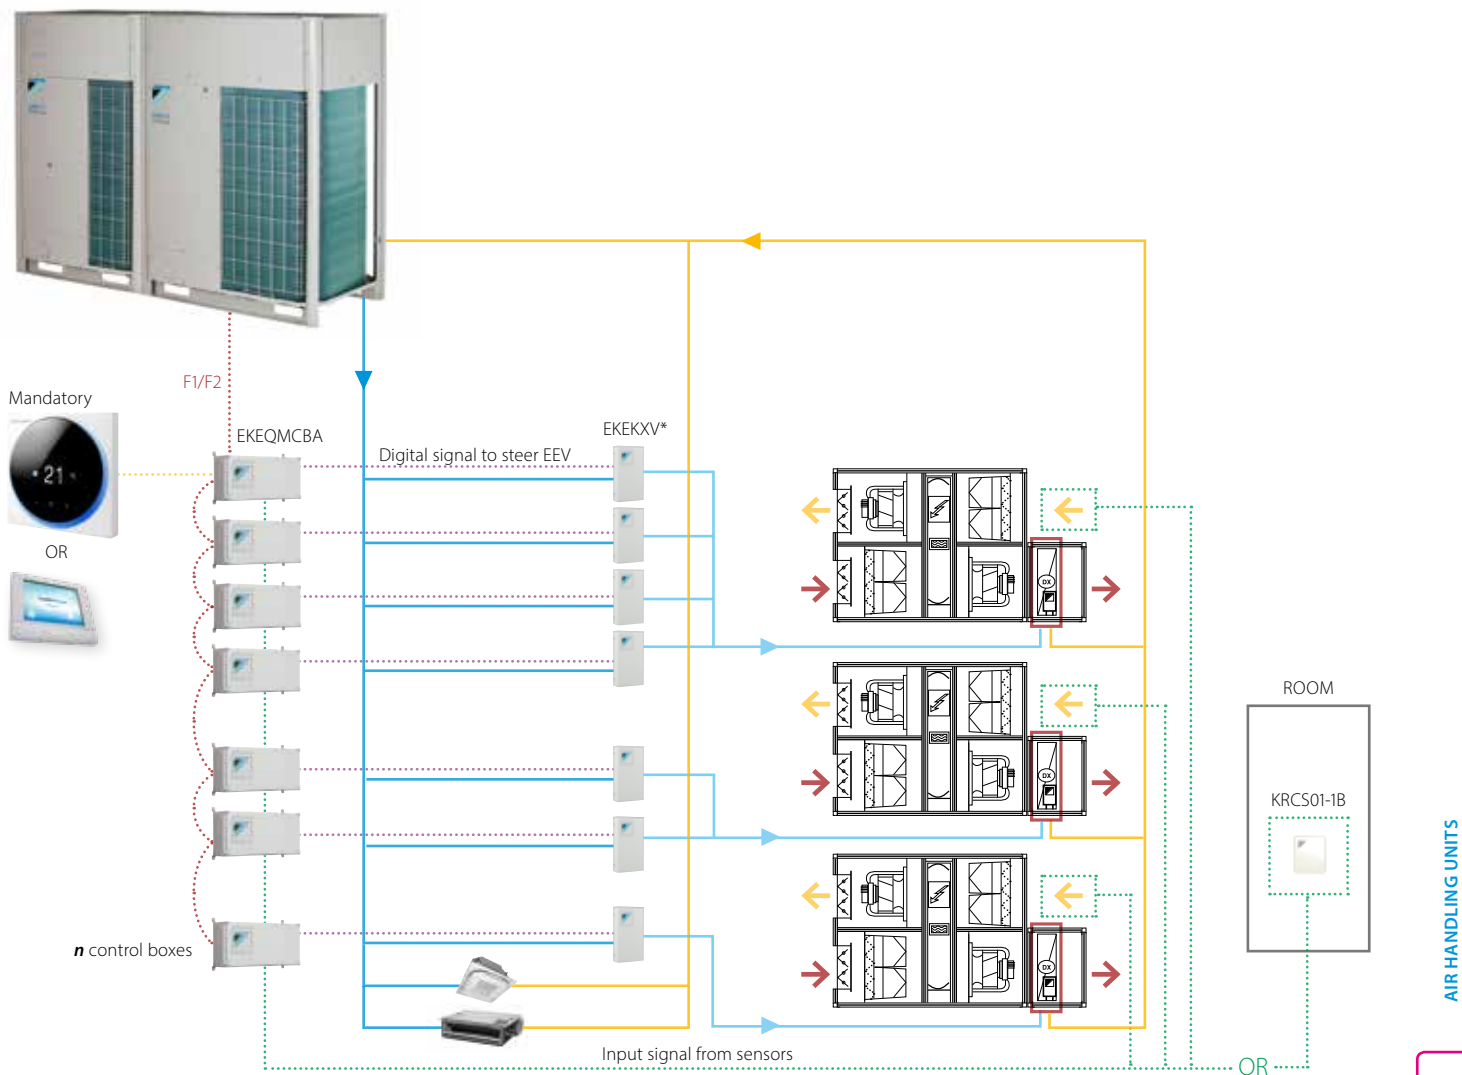

## Outdoor unit compatibility

Not mandatory to have VRV DX indoors:

RYYQ8T > RYYQ54T

RXYQ8T > RXYQ54T

RWEYQ8T9 > RWEYQ30T9

Mandatory to have VRV DX indoors:

REYQ8T > REYQ54T

## Connection restrictions


Connection Ratio between 50-110%

$$CR = \frac{\sum IU CC}{\sum OU CC} = \frac{\sum (CF \times EKEV CC)_{1-n}}{\sum OU CC}$$

RULES:  $\sum EKEV CC$ : 0-60%  $\sum IU CC$ : 50-110%

CF is the correction factor

CC is the capacity class

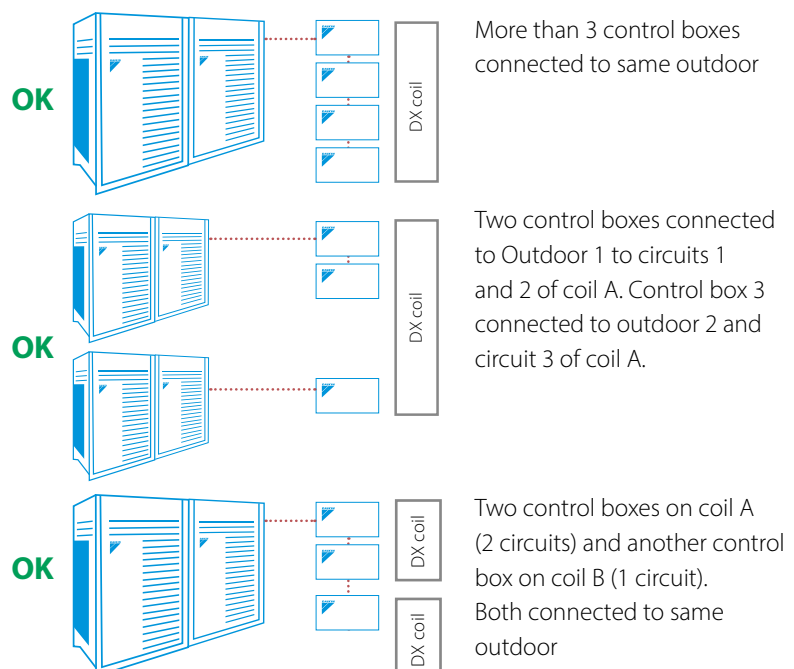

# Options & accessories



VH ELECTRICAL HEATER FOR VAM

CONTROLS



FILTERS





# Madoka

User-friendly wired remote controller with premium design



White



Silver



Black

BRC1H519W/S/K

- › Sleek and elegant design
- › Intuitive touch button control
- › 3 color versions
- › Advanced settings and monitoring can be easily done via your smartphone
- › Flat back for easy wall installation
- › Compact to fit standard size socket boxes



reddot award 2018  
winner



Advanced user settings



Field settings

DIRECT INTEGRATION  
WITH DAIKIN VENTILATION PRODUCTS

		Heat Recovery Ventilation - Modular L (Smart)						
		ALB02LBS/RBS	ALB03LBS/RBS	ALB04,05LBS/RBS	ALB06,07LBS/RBS	VAM 150FC	VAM 250FC	VAM 350J
Individual control systems	BRC301B61 VAM wired remote control	•	•	•	•	•	•	•
	Madoka BRC1H519W (Glossy white) / BRC1H519S (Silver Metallic) / BRC1H519K (Black matte) User-friendly wired remote controller with premium design	•	•	•	•	•	•	•
	BRC1E53A/B/C Wired remote control with full-text interface and back-light	•	•	•	•	•	•	•
	BRC1D52 Standard wired remote control with weekly timer	•	•	•	•	•	•	•
Centralised control systems	DCC601A51 intelligent Tablet Controller	•	•	•	•	•	•	•
	DCM601A51 intelligent Touch Controller	•	•	•	•	•	•	•
	DCS302C51 Central remote control	•	•	•	•	•	•	•
	DCS301B51 Unified ON/OFF control	•	•	•	•	•	•	•
	DST301B51 Schedule timer	•	•	•	•	•	•	•
	DCM601A51 intelligent Touch Manager	•	•	•	•	•	•	•
Building Management System & Standard protocol interface	EKMBOXA Modbus interface	•	•	•	•	•	•	•
	DMS502A51 BACnet Interface	•	•	•	•	•	•	•
	DMS504B51 LonWorks Interface	•	•	•	•	•	•	•
Filters	Coarse 55% (G4)	ALF02G4A	ALF03G4A	ALF05G4A	ALF07G4A			
	ePM <sub>10</sub> 75% (M5)	ALF02M5A	ALF03M5A	ALF05M5A	ALF07M5A			
	ePM <sub>10</sub> 70% (M6)							EKAFVJ50F6
	ePM <sub>1</sub> 50% (F7)	ALF02F7A	ALF03F7A	ALF05F7A	ALF07F7A			
	ePM <sub>1</sub> 55% (F7)							EKAFVJ50F7
	ePM <sub>1</sub> 70% (F8)							EKAFVJ50F8
	ePM <sub>1</sub> 80% (F9)	ALF02F9A	ALF03F9A	ALF05F9A	ALF07F9A			
	High efficiency filter							
	Replacement air filter							
Mechanical accessories	Rail	ALA02RLA	ALA03RLA	ALA05RLA	ALA07RLA			
	Rectangular to round duct transition	ALA02RCA	ALA03RC	ALA05RCA	ALA07RCA			
	Separate plenum							
CO <sub>2</sub> sensor		BRYMA200 (preliminary)	BRYMA200 (preliminary)	BRYMA200 (preliminary)	BRYMA200 (preliminary)			BRYMA65
Electrical heater		ALD02HEFB	ALD03HEFB	ALD05HEFB	ALD07HEFB	VH1B	VH2B	VH3B
Silencer (900mm depth)		ALS0290A	ALS0390A	ALS0590A	ALS0790A			
Electrical accessories	Wiring adapter for external monitoring/control (controls 1 entire system)					KRP2A51	KRP2A51	KRP2A51 (2)
	Adapter PCB for humidifier					KRP50-2	KRP50-2	KRP1C4 (5)
	Adapter PCB for third party heater					BRP4A50	BRP4A50	BRP4A50A (4)
	External wired temperature sensor							
	Adapter PCB Mounting plate							

#### Notes

- (1) Do not connect the system to DIII-net devices LONWorks interface, BACnet interface, ...; (intelligent Touch Manager, EKMBOXA are allowed)
- (2) Installation box KRP1BA101 needed
- (3) Adapter PCB mounting plate needed, applicable model can be found in the table above
- (4) 3rd party heater and 3rd party humidifier cannot be combined
- (5) Installation box KRP50-2A90 needed
- (6) Contains 1 plenum and can be used for half side of the unit (up to 4 plenums can be used on 1 unit)
- (7) Available only with optional plenum



## Electrical heater for Modular L smart

- › Total solution for fresh air with Daikin supply of both Modular L Smart and electrical heaters
- › Increase comfort in low outdoor temperature thanks to the heated outdoor air
- › Integrated electrical heater concept (no additional accessories required)
- › Standard dual flow and temperature sensor
- › Heater only consumes what is required to pre-heat to the desired minimum fresh air temperature; thus saving energy



Electrical heater for Modular L Smart (ALD)	02HEFB	03HEFB	05HEFB	07HEFB
Capacity kW	1,5	3	7,5	15
Connectable Modular L Smart size	02	03	04, 05	06, 07
Supply voltage	230V,1ph		400V,3ph	
Output current (maximum) (A)	6,6	13,1	10,9	21,7
Temperature sensor	15k ohms at -20 °C 10k ohms at +10 °C	16k ohms at -20 °C 10k ohms at +10 °C	17k ohms at -20 °C 10k ohms at +10 °C	18k ohms at -20 °C 10k ohms at +10 °C
Temperature control range	- 20 °C to 10 °C			
Control fuse	Mini Circuit Breaker 6 A			
LED indicators	"Yellow = Airflow fault Red = Heat ON"			
Mounting holes	Depends on duct size			
Maximum ambient adjacent to terminal box	30°C (during operation)			
Auto high temp. cutout	75°C Pre-set			
Man. reset high temp.cutout	120°C Pre-set			
Width (mm)	470	620	720	920
Depth (mm)	370	370	370	370
Height (mm)	193	243	343	443

## Electrical heater for VAM

- › Total solution for fresh air with Daikin supply of both VAM and electrical heaters
  - › Increased comfort in low outdoor temperature thanks to the heated outdoor air
  - › Integrated electrical heater concept (no additional accessories required)
  - › Standard dual flow and temperature sensor
  - › Flexible setting with adjustable setpoint
  - › Increased safety with 2 cut-outs: manual & automatic
  - › BMS integration thanks to:
    - Volt free relay for error indication
    - 0-10VDC input for setpoint control
- ⚡ Heater only consumes what is required to pre-heat to the desired minimum fresh air temperature; thus saving energy




VH		1B	2B	3B	4B	4/AB	5B(1)
Capacity	kW	1			1.5	2.5	2.5
Duct diameter	mm	100	150	200	250		300
Connectable VAM		VAM150FC	VAM250FC	VAM350,500J	VAM650J, VAM800J, VAM1000J		VAM1500J, VAM2000J
ELECTRICAL HEATER FOR VAM		VH					
Supply voltage		220/250V ac 50/60 Hz. +/-10%					
Output current (maximum)		19A at 40°C (ambient)					
Temperature sensor		5k ohms at 25°C (table 502 1T)					
Temperature control range		0 to 40°C / (0-10V 0-100%)					
Control fuse		20 x 5mm 250mA					
LED indicators		Power ON - Yellow Heater ON - Red (solid or flashing, indicating pulsed control) Airflow fault - Red					
Mounting holes		98mm x 181mm centres 5 mm ø holes					
Maximum ambient adjacent to terminal box		35°C (during operation)					
Auto high temp. cutout		100°C Pre-set					
Man. reset high temp. cutout		125°C Pre-set					
Run relay		1A 120V AC or 1A 24V DC					
BMS setpoint input		0-10VDC					

(1) Available only with the optional plenum

We're here to help you!  
Online and offline



<http://literature.daikinpromoshop.eu>

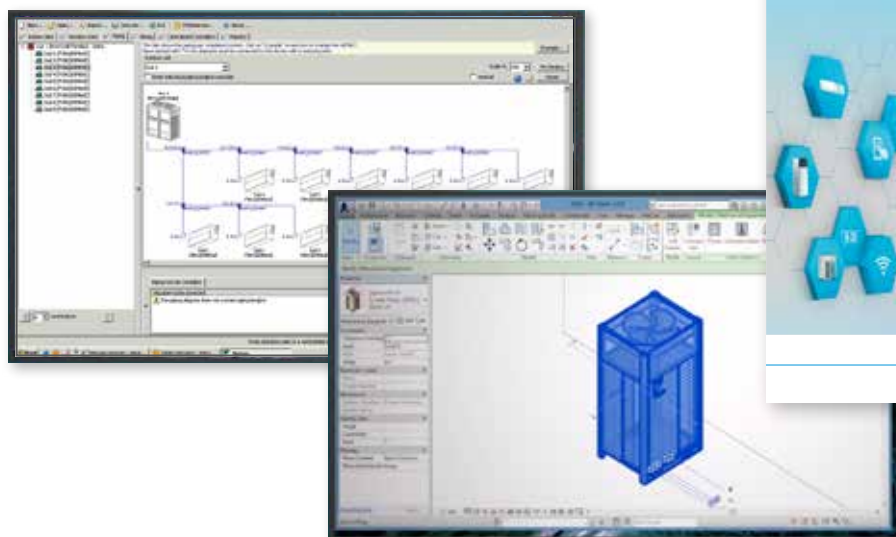

# Tools and platforms

Literature overview	50
Supporting tools, software and apps	52

# Commercial market - literature overview

## for professional network

Solution guides:

Reference books:



Product profiles:



**VRV IV range**  
Detailed VRV IV standards and technologies benefits. Main features and specs of VRV IV product range

206



**VRV IV i-series**  
Main benefits, application examples and specs of VRV IV i-series product range

207




**VRV IV S-series**  
Main benefits, application examples and specs of VRV IV S-series product range

208



**Sky Air A-series**  
Main benefits and specs

116



**Water-to-air heat pump**  
Detailed info on VRV IV W-series, application examples, technical system design background

209

Focus topics:



**Replacement Technology**  
Clear installer benefits of VRV replacement technology

214



**Infrastructure cooling**  
Clear installer benefits why to choose Daikin for infrastructure cooling


140

Product flyers:



**Wired Remote Control**  
Detailed info on BRC1E-52A/B remote control

306



**RTD modbus interface**  
Detailed info on RTD controls and applications

308

Product catalogues:



**Sky Air Catalogue**  
Detailed technical information & benefits on Sky Air/Ventilation/Biddle Air Curtain/Control systems/AHU

100



**VRV Catalogue**  
Detailed technical information & benefits of the VRV total solution

200



**Ventilation Catalogue**  
Detailed info on Ventilation products

203

## for your customers



### Commercial Solutions

Daikin offers solutions for commercial applications

100

Reference catalogue  
Daikin commercial and industrial references

213



### Green Building Solutions

Clear building owner/investor benefits why to choose Daikin for a green building, with emphasis on BREEAM


216



### Hotel Solutions

Clear building owner/investor benefits why to choose Daikin for a hotel

218



### Intelligent Touch Manager

Detailed benefits of Intelligent Touch Manager


302



### DCC601A51

Detailed benefits of DCC601A51 and Daikin Cloud Service

303



### Replacement technology

Clear building owner/investor benefits of replacement technology

215



### Sky Air product leaflets

Single page leaflet with the main benefits and technical specifications of each individual Sky Air unit. Ideal for quotations



### VRV product leaflets

Single page leaflet with the main benefits and technical specifications of each individual VRV unit. Ideal for quotations



## Technical documentation:

All latest Daikin catalogues are available in a convenient library on the internet:  
[www.daikineurope.com/support-and-manuals/catalogues](http://www.daikineurope.com/support-and-manuals/catalogues)




# Supporting tools, software and apps

[www.daikineurope.com/  
support-and-manuals/  
software-downloads](http://www.daikineurope.com/support-and-manuals/software-downloads)

## New web based Xpress selection software

### Making selection easy, anytime, anywhere

- › Web & cloudbased access to your projects from anywhere, at any time...
- › Platform (Windows, Mac, ...) and hardware (laptop, desktop, tablet) independent
- › Re-engineered GUI for maximum easy of use
- › No need to do local installation
- › No tool updates required (always latest version available)
- › Possibility to copy / share projects

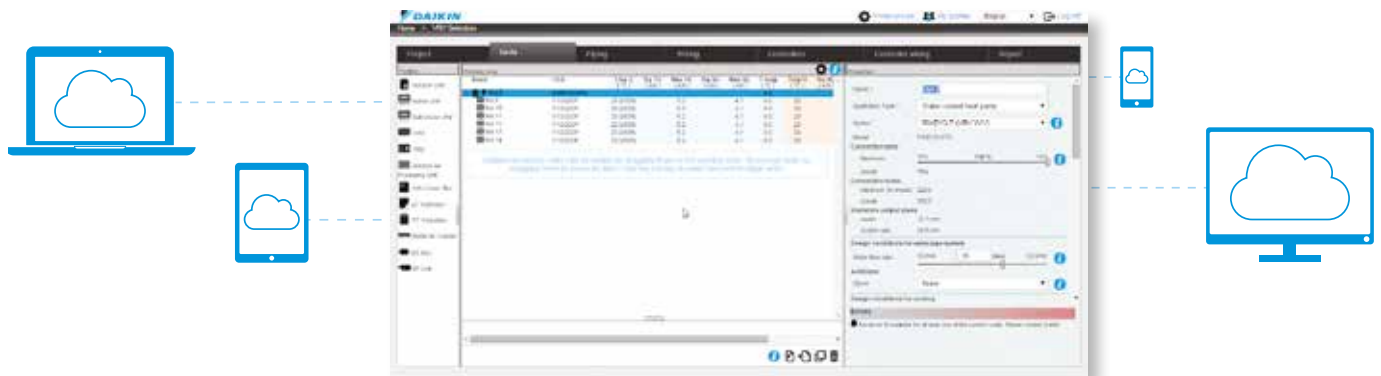


Easy selection, anytime, anywhere

### Main functions



Easy editing of piping

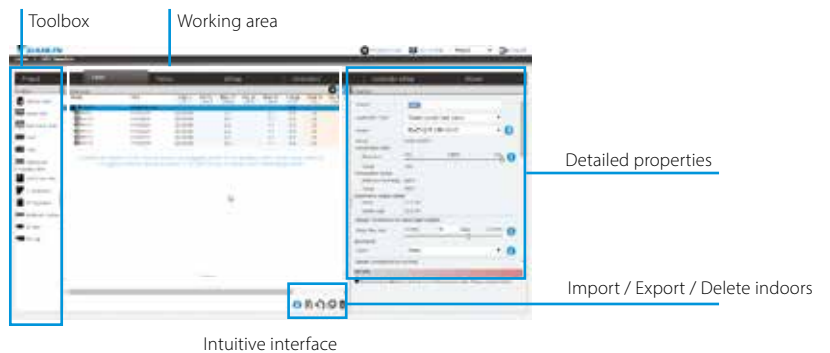

Intuitive interface



Clear wiring overview, easy to make control groups




Clear overview of control groups and central controls

## Other selection software

### VRV Pro

Enables VRV air conditioning systems to be engineered in a precise and economical way, taking into account the complex piping rules. Moreover, it ensures optimum operating cycles and maximum energy efficiency.


- › Accurate heat load calculation
- › Precise selection based on peak loads
- › Energy consumption indication

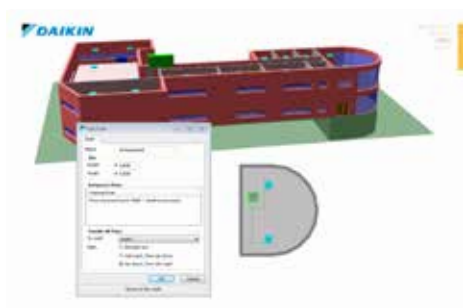

### Ventilation Xpress

Selection tool for ventilation devices (VAM, VKM). The selection is based on given supply/extract airflows (including fresh up and given ESP of supply/extract ducting):

- › Determines size of electrical heaters
- › Visualisation of psychrometric chart
- › Visualisation of selected configuration
- › Required field settings mentioned in the report

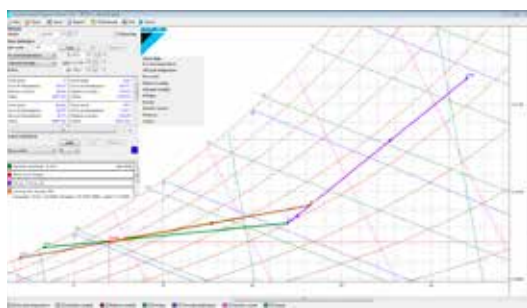

### Webbased ASTRA selection **NEW** for air handling units

A powerful tool to select the right Air Handling Units for your needs.

- › 3D interface
- › quick selection procedures
- › new print-out possibilities and report shapes



### WAGO selection tool **NEW**

The WAGO Selection Tool is specifically designed to select the optimal WAGO I/O system for your needs.

- › Easy selection of WAGO materials
- › Material list creation
- › Time saving
  - Includes wiring schemes
  - Contains commissioning/preset data for



# Plug-ins and third-party software tools

## Building Information Modelling (BIM) support


- › BIM improves efficiency of design and build phase
- › Daikin is among the first to supply a full library of BIM objects for its VRV products



[www.daikin.eu/bim](http://www.daikin.eu/bim)

## VRV CAD 2D

- › Displays VRV pipe design on a Autocad 2D floorplan
- › Improves project management
- › Accurately calculates the pipe dimensions and refnets
- › Determines the outdoor unit size
- › Validates VRV pipe rules
- › Accounts for the extra refrigerant charge, including a max room concentration check

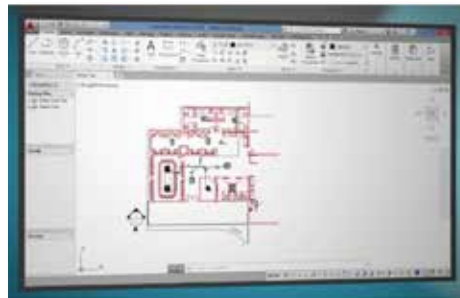

<http://www.daikineurope.com/autocad/index.jsp>

# Energy simulation and design aid tools


## Seasonal simulator

- › The Seasonal Simulator is an innovative software tool that calculates and compares potential seasonal efficiency ratings.
- › This user-friendly tool compares various Daikin systems, annual power consumption, CO<sub>2</sub> emissions, and much more, to present an accurate ROI calculation in a matter of minutes.



## Psychrometrics diagram **NEW**

- › The Psychrometrics Diagram Viewer demonstrates the changing properties of moist air.
- › With this tool, users can choose two points with specific conditions, plot them on the diagram and select actions to change the conditions, i.e. heat, cool and mix air.

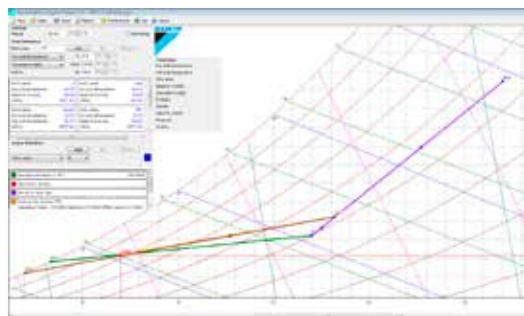

## Service tools

### Error code app

Quickly know the meaning of fault codes, for each product family and the potential cause

### D-Checker

D-checker is a software application used to record and monitor operation data of Daikin applied, split, Multi-split, Sky-air units, Daikin Altherma LT, ground source heat pump, Hybrid, ZEAS, Conveni-pack & R410A Booster unit

### Bluetooth adaptor **NEW**

Monitoring of Split, Sky Air and VRV data via any bluetooth device


- › No need to access the outdoor unit
  - Connects with D-Checker software (for laptops)
  - Connects with monitoring app (for tablets or smartphones)

### VRV Service-Checker

- › Connected via F1/F2 bus to check multiple systems at the same time
- › Connection of external pressure sensors possible



Diagnosis of the Bluetooth system possible:

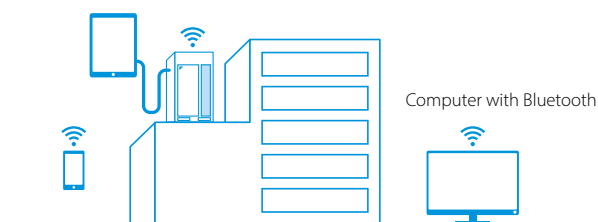

## Online support

### **NEW** Business portal


- › Experience our new extranet that thinks with you at [my.daikin.eu](http://my.daikin.eu)
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop

[my.daikin.eu](http://my.daikin.eu)



## Internet

Find our solution for different applications:

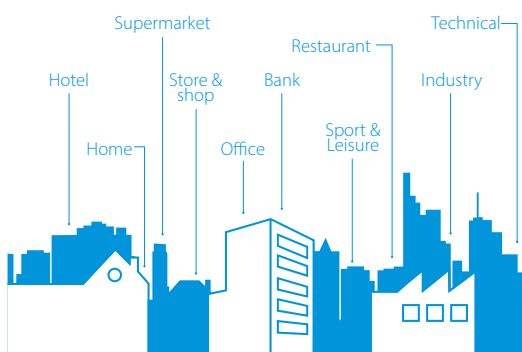

- › Get more commercial details on our flagship products via our dedicated minisites
- › See our references



[www.daikineurope.com/references](http://www.daikineurope.com/references)




# Technical drawings

ALB-RBS / LBS  
VAM-J/FC  
VKM-GB(M)


58  
64



## ALB02RBS/LBS

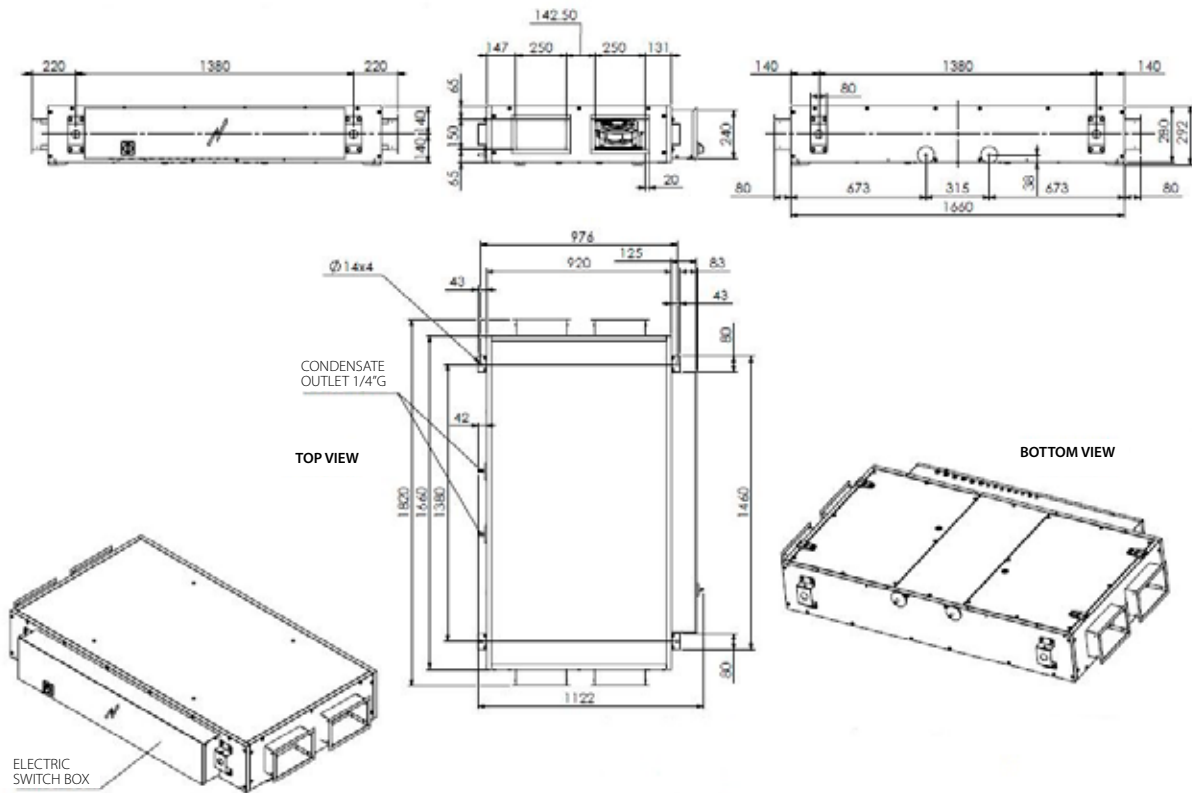


## ALB03RBS/LBS

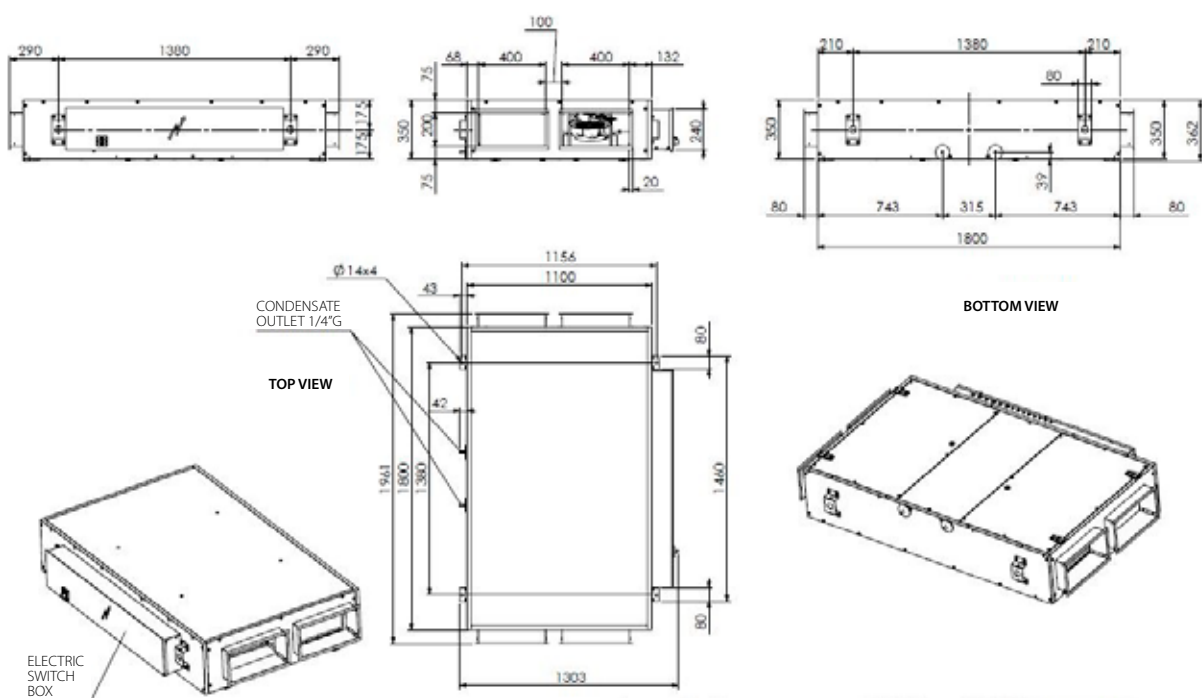




## ALB04RBS/LBS

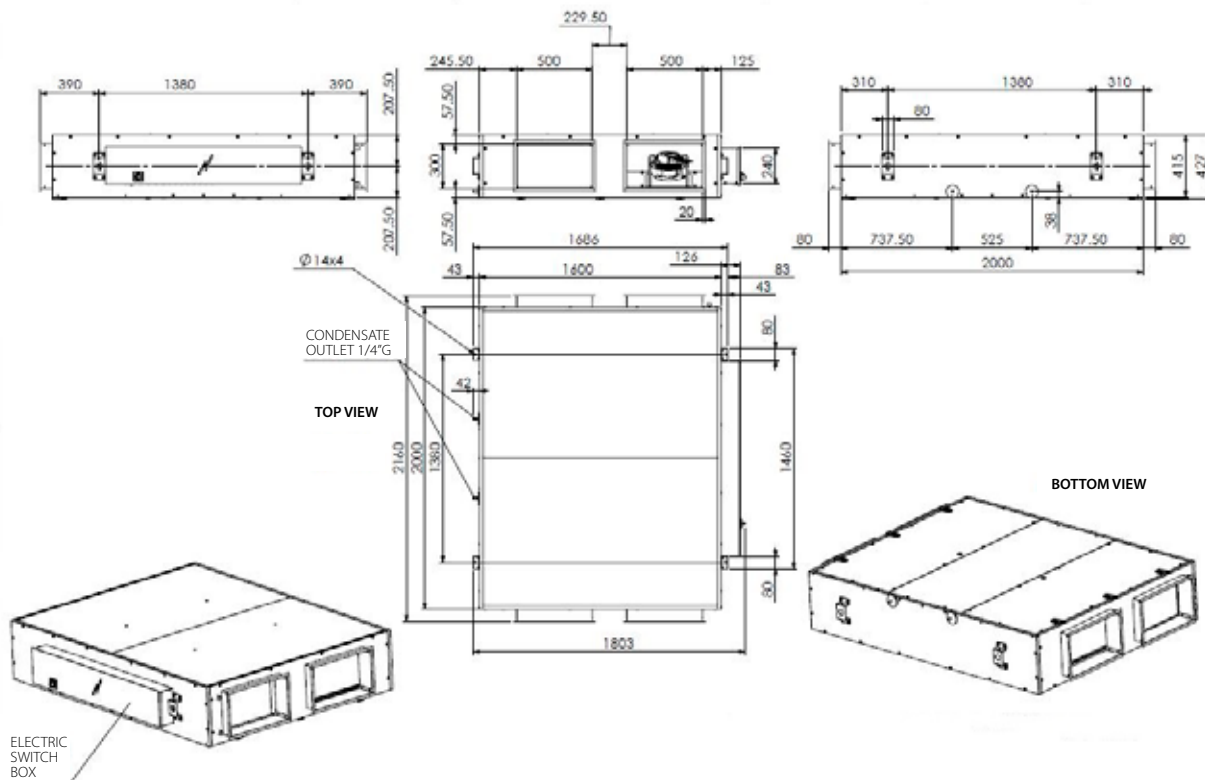


## ALB05RBS/LBS

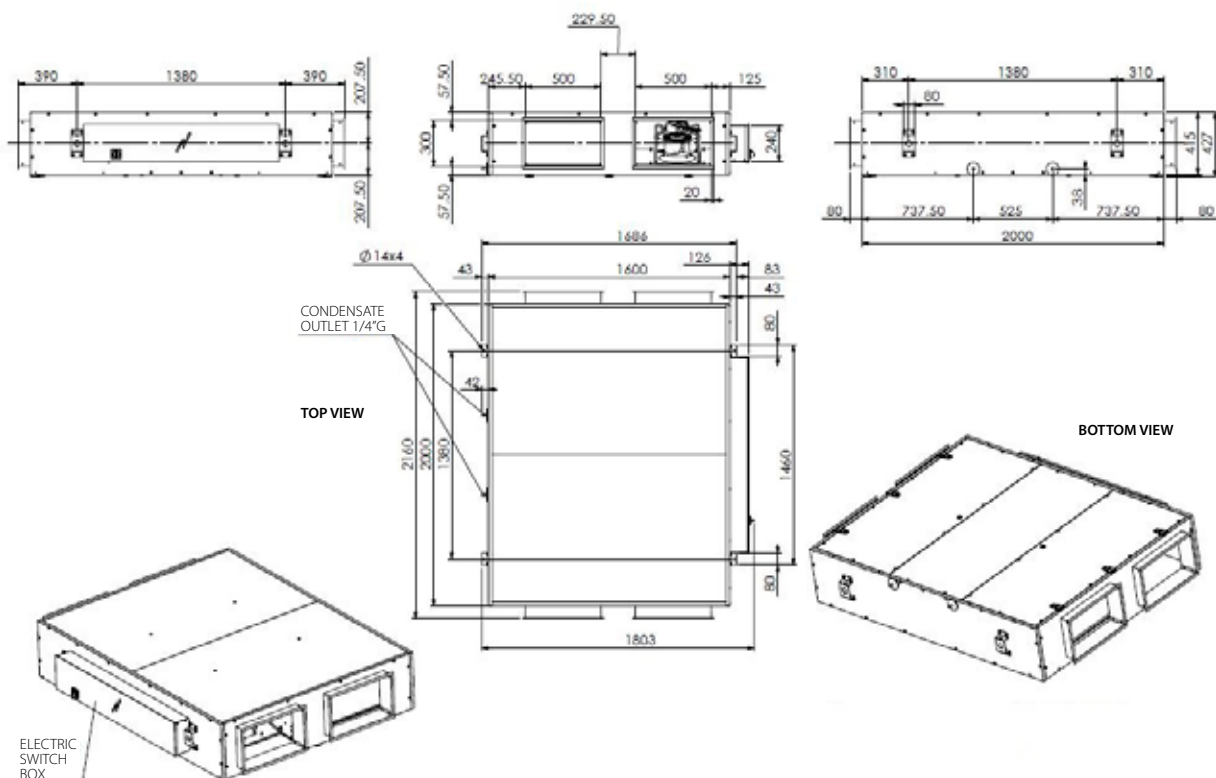




## ALB06RBS/LBS

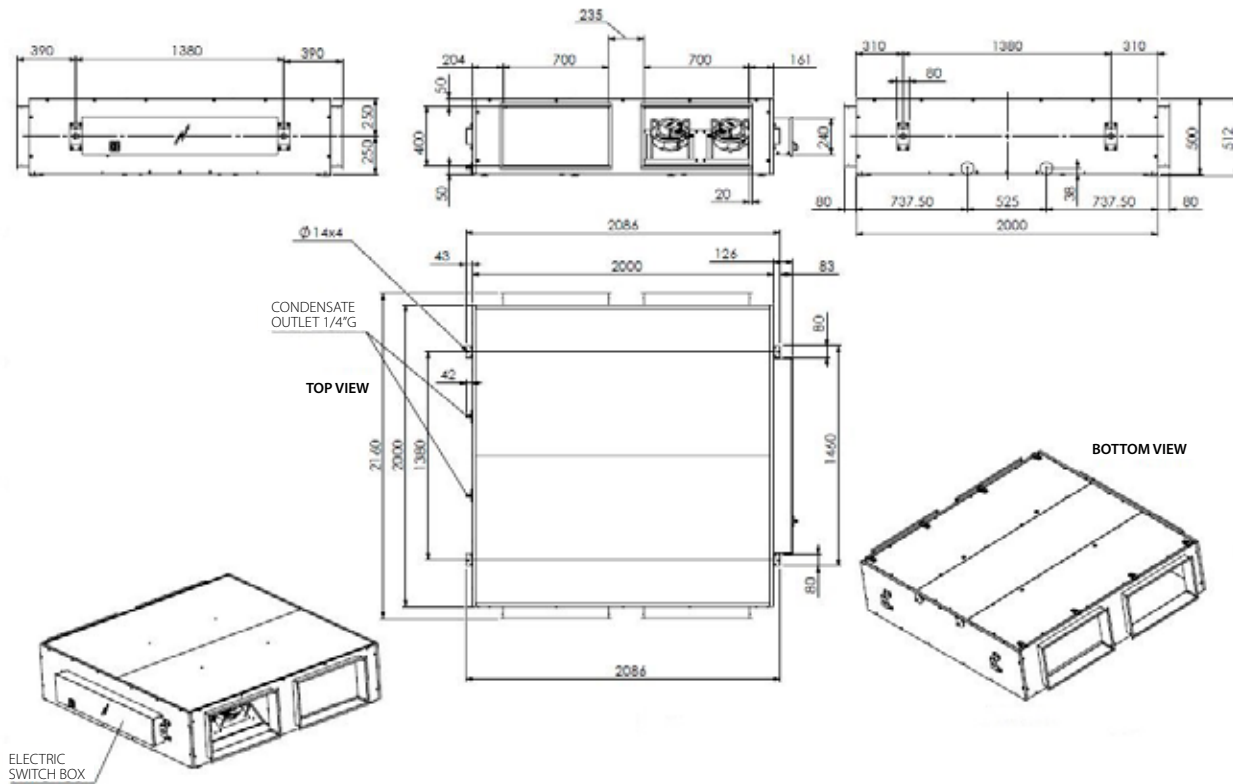


## ALB07RBS/LBS

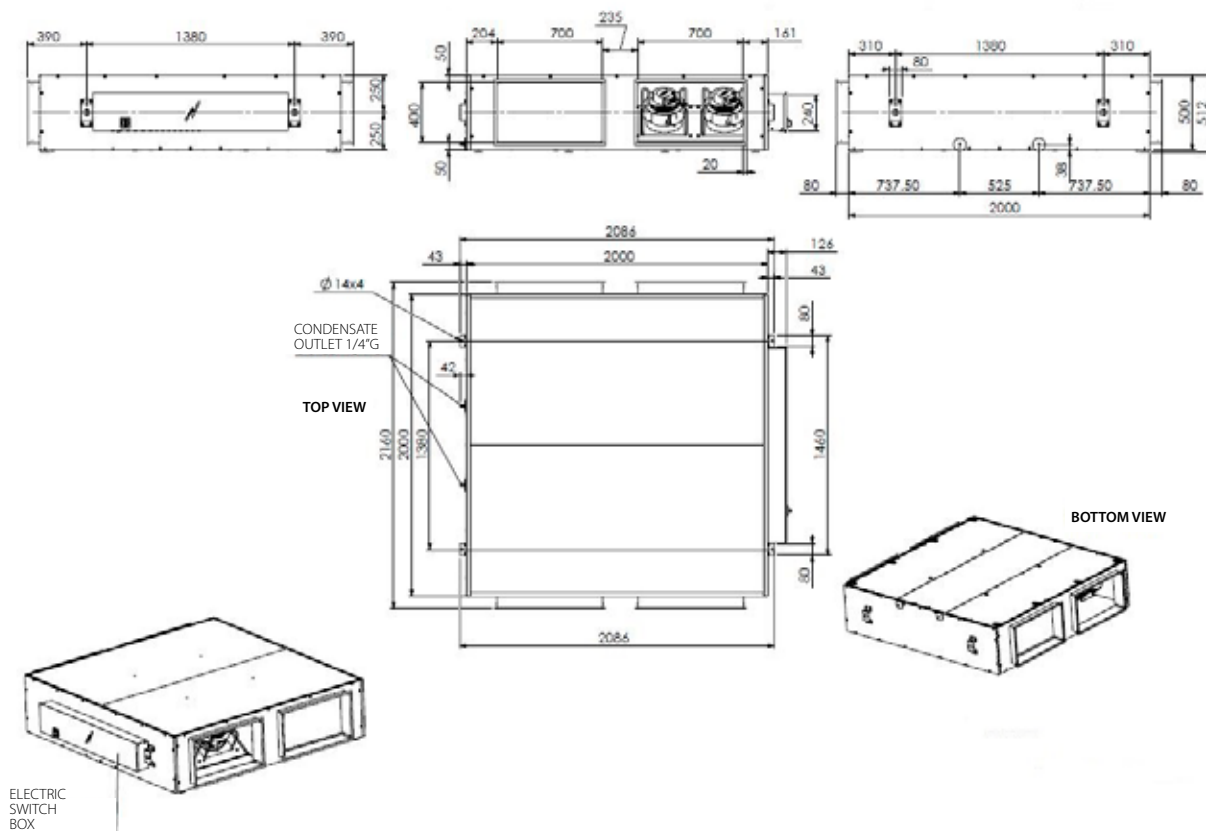



## ALB02RBS/LBS

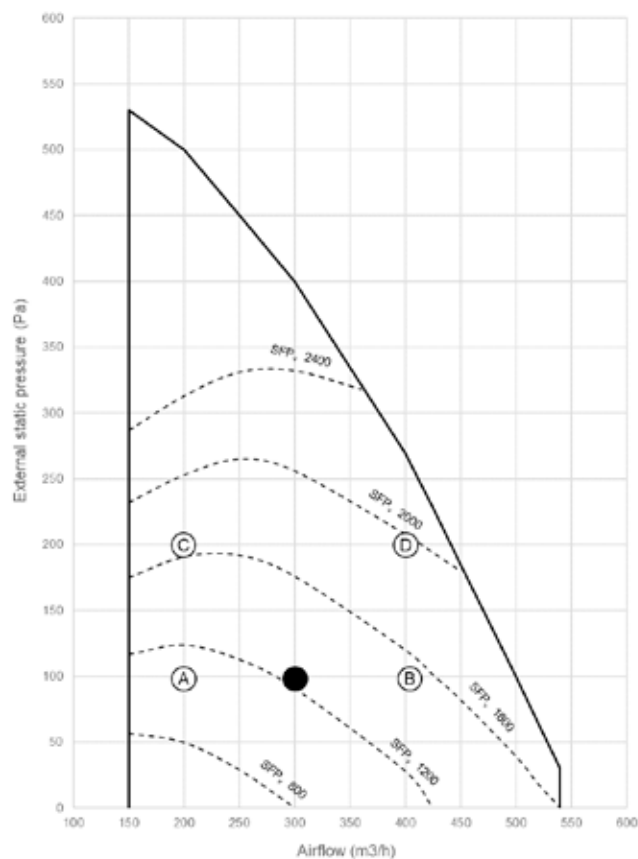


The diagram shows the available external pressure for the duct system given an airflow.

**SFPv = Specific Fan Power (W/m³/s)**

The SFPv curves are referring to the complete unit. Moreover, it includes power to both supply and extract fan divided by either the supply or extract volume whichever is the greater.

● Nominal working point

## ALB03RBS/LBS

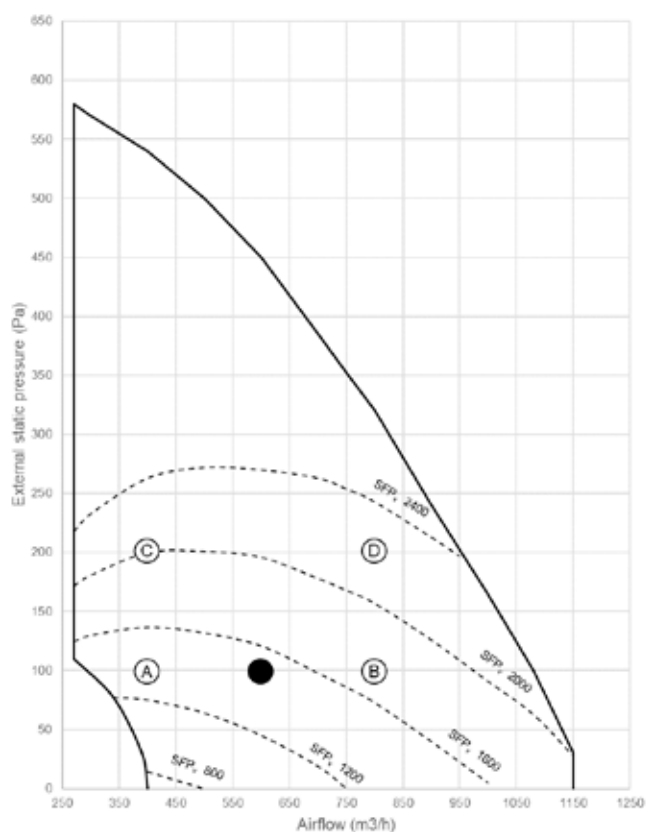

The diagram shows the available external pressure for the duct system given an airflow.


**SFPv = Specific Fan Power (W/m³/s)**

The SFPv curves are referring to the complete unit. Moreover, it includes power to both supply and extract fan divided by either the supply or extract volume whichever is the greater.

● Nominal working point



## ALB04RBS/LBS

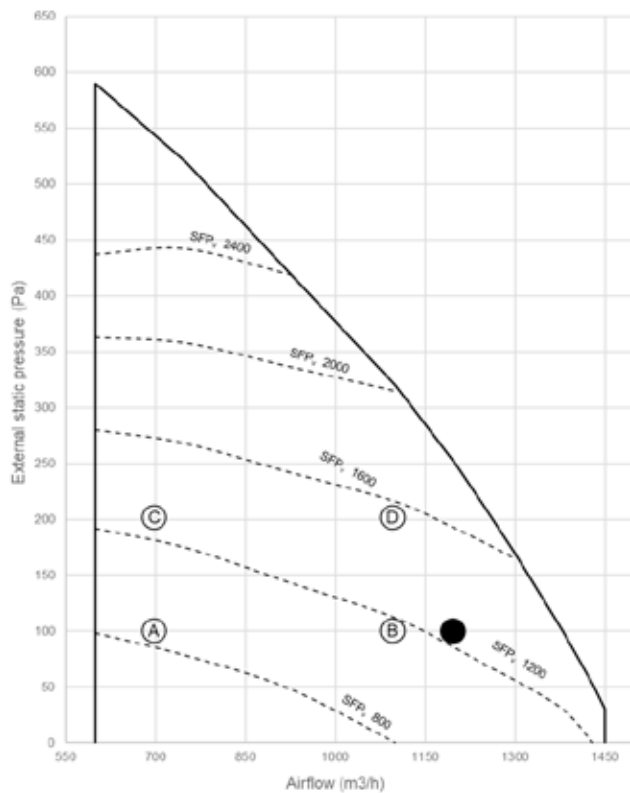


The diagram shows the available external pressure for the duct system given an airflow.

**SFPv = Specific Fan Power (W/m³/s)**

The SFPv curves are referring to the complete unit. Moreover, it includes power to both supply and extract fan divided by either the supply or extract volume whichever is the greater.

● Nominal working point

## ALB05RBS/LBS

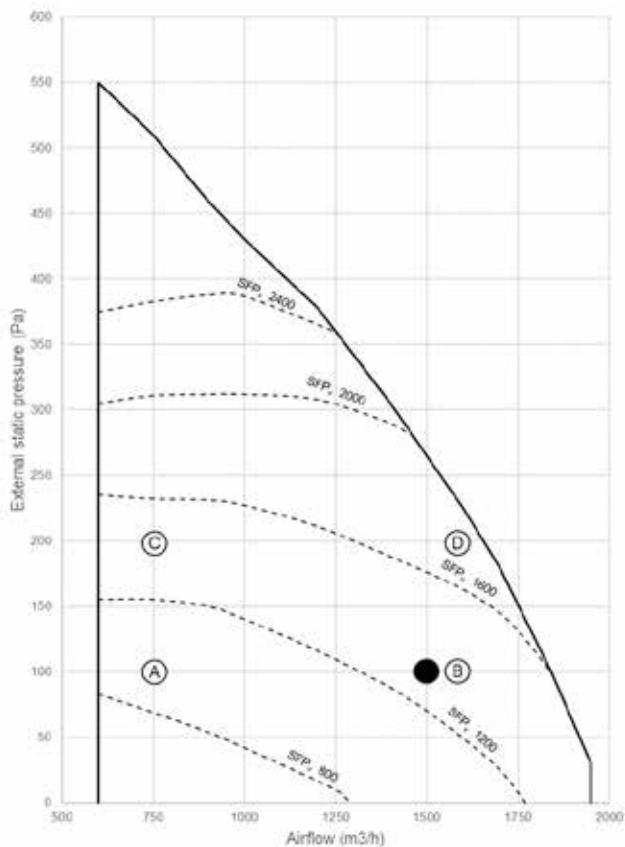

The diagram shows the available external pressure for the duct system given an airflow.


**SFPv = Specific Fan Power (W/m³/s)**

The SFPv curves are referring to the complete unit. Moreover, it includes power to both supply and extract fan divided by either the supply or extract volume whichever is the greater.

● Nominal working point



## ALB06RBS/LBS

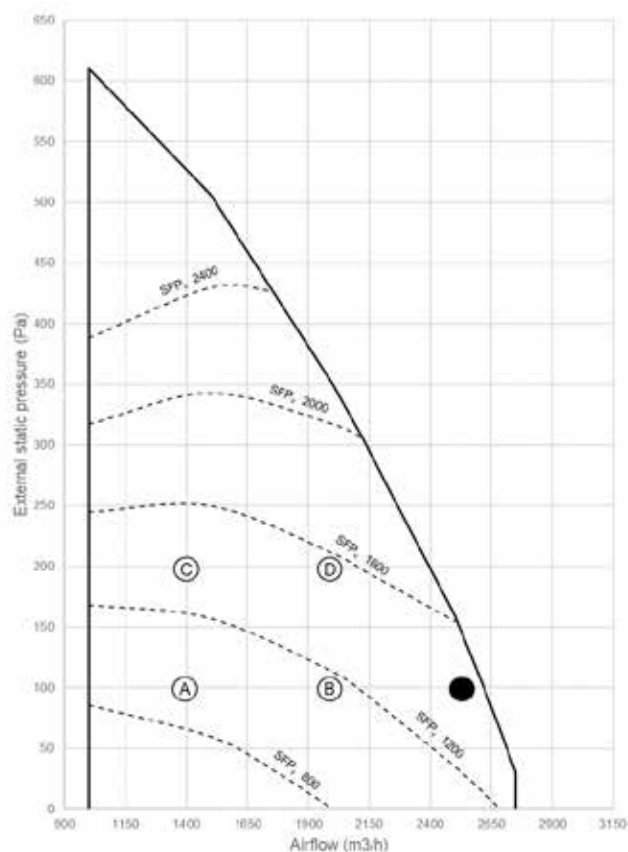


The diagram shows the available external pressure for the duct system given an airflow.

**SFPv = Specific Fan Power (W/m³/s)**

The SFPv curves are referring to the complete unit. Moreover, it includes power to both supply and extract fan divided by either the supply or extract volume whichever is the greater.

● Nominal working point

## ALB07RBS/LBS

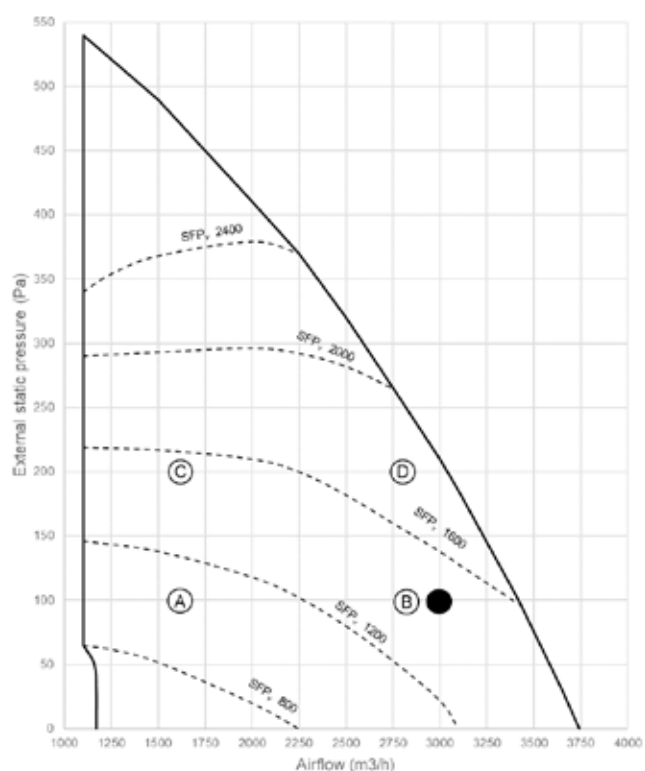

The diagram shows the available external pressure for the duct system given an airflow.


**SFPv = Specific Fan Power (W/m³/s)**

The SFPv curves are referring to the complete unit. Moreover, it includes power to both supply and extract fan divided by either the supply or extract volume whichever is the greater.

● Nominal working point



## VAM150FC

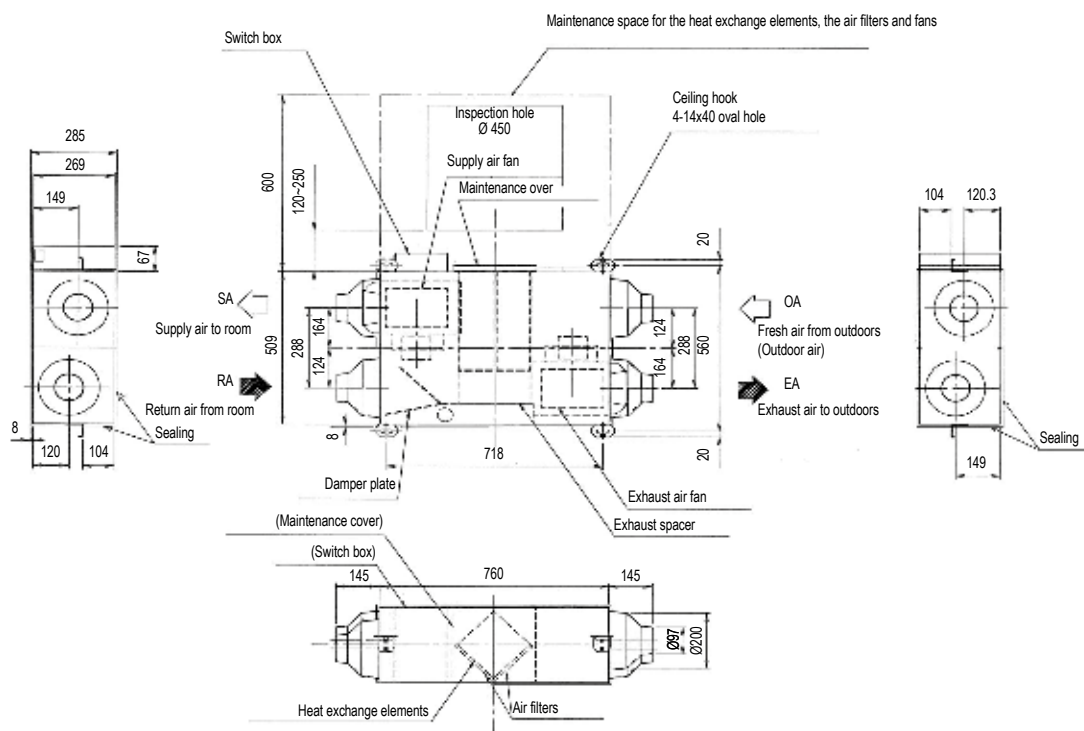


### NOTE

- 1 Be sure to provide the inspection hole (450x450 mm) to inspect the air filters, the exchange elements and fans.

3TW27874-1

## VAM250FC

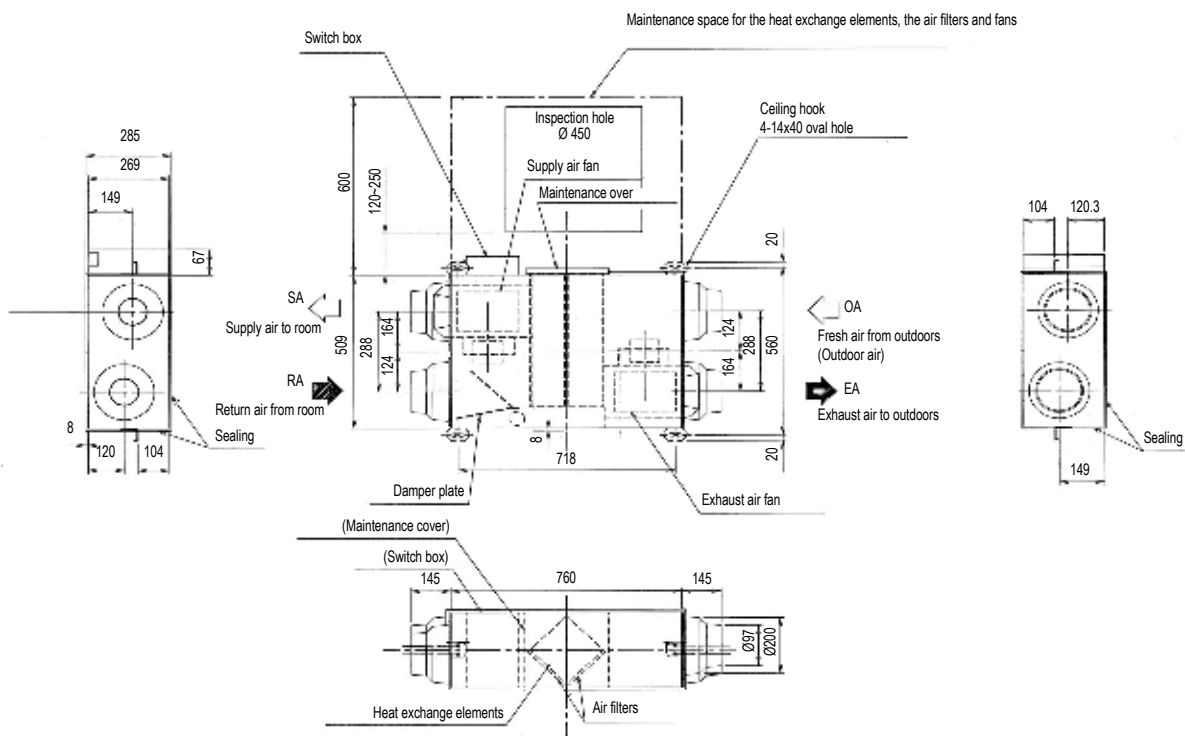


### NOTE

- 1 Be sure to provide the inspection hole (450x450 mm) to inspect the air filters, the exchange elements and fans.

3TW27884-1



## VAM350-500J

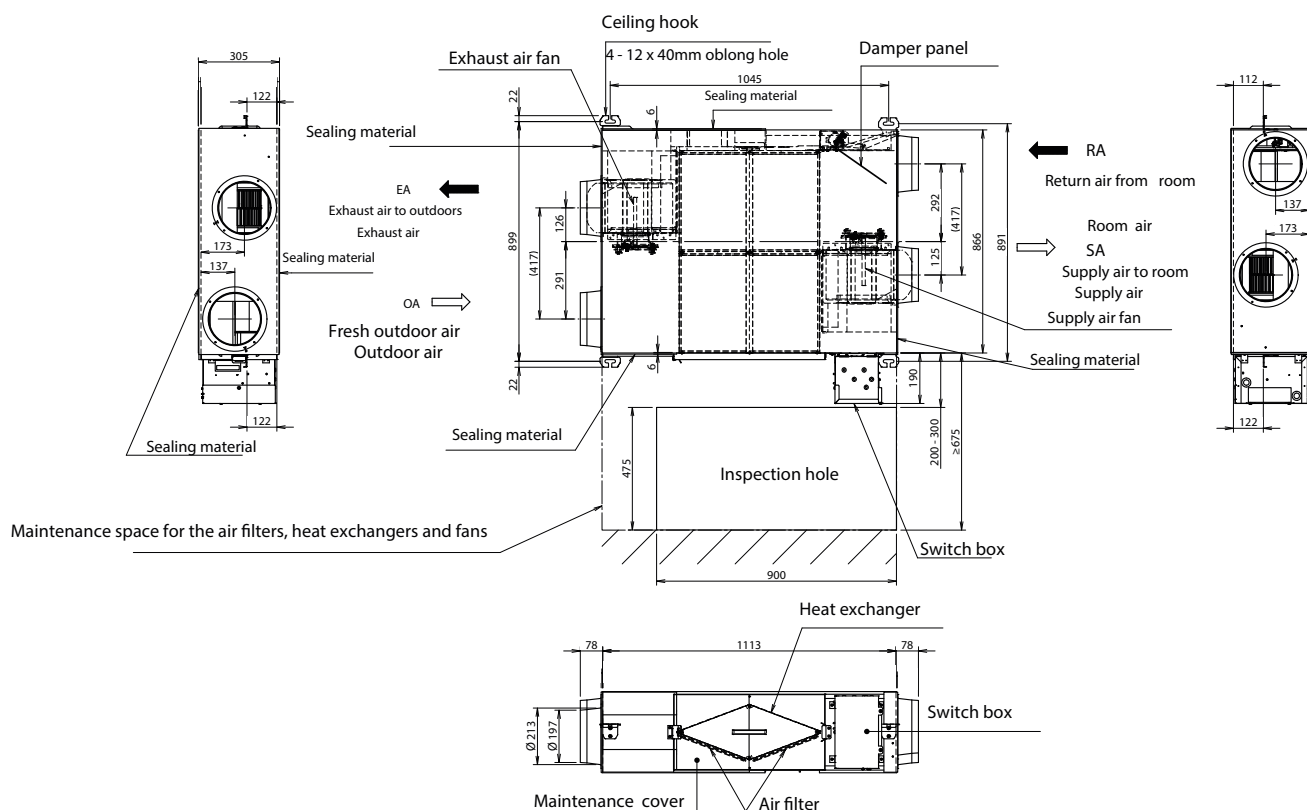


### Notes

1. To allow for the inspection of the air filters, heat exchangers, and fans, be sure to provide the inspection hole.

3D112815B

## VAM650J

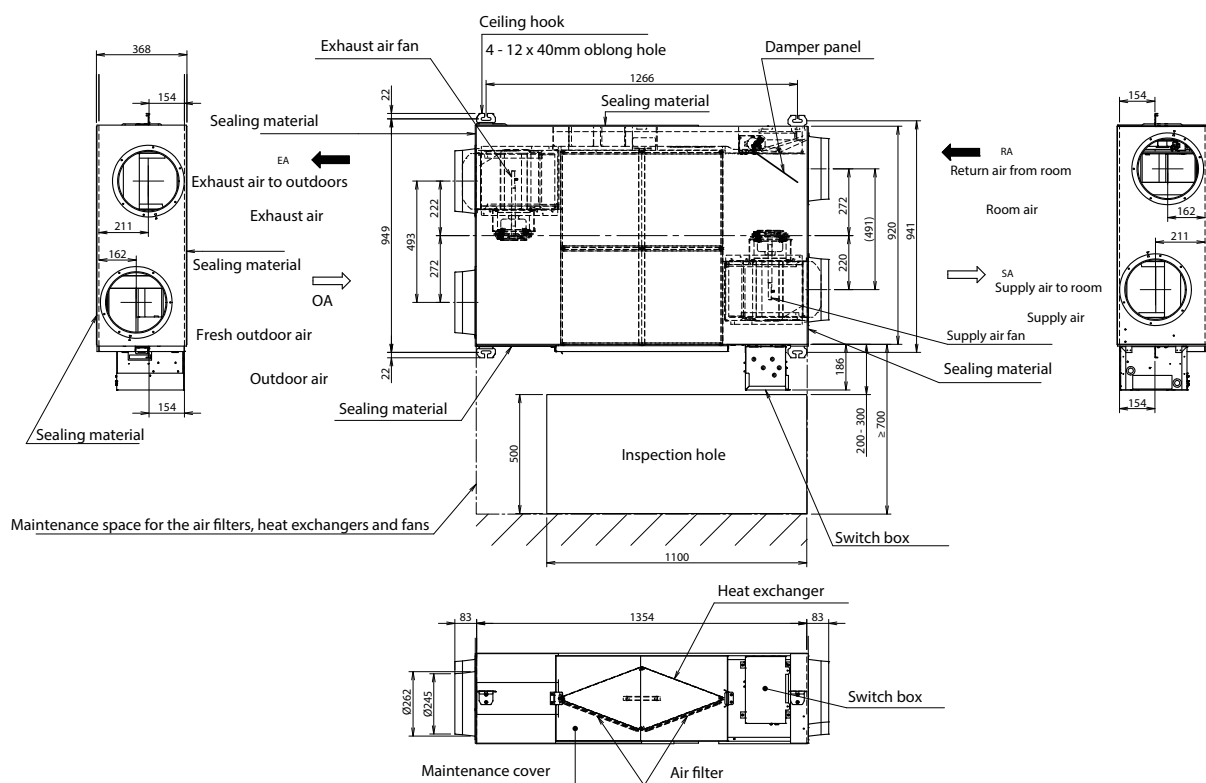

### Notes


1. To allow for the inspection of the air filters, heat exchangers, and fans, be sure to provide the inspection hole.

3D112816B



## Detailed technical drawings

### VAM800-1000J

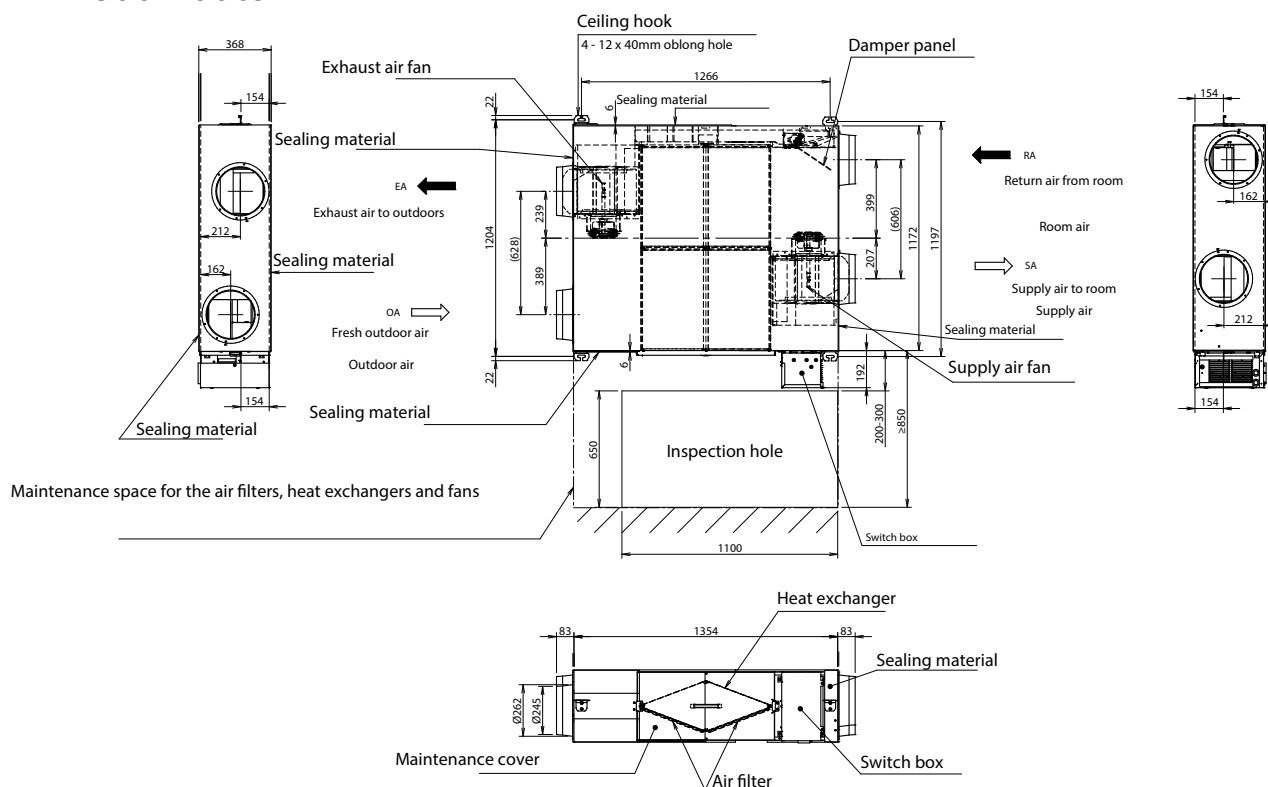


#### Notes

1. To perform maintenance on the air filter, it is required to provide a service access panel.

3D112817C

### VAM1500-2000J

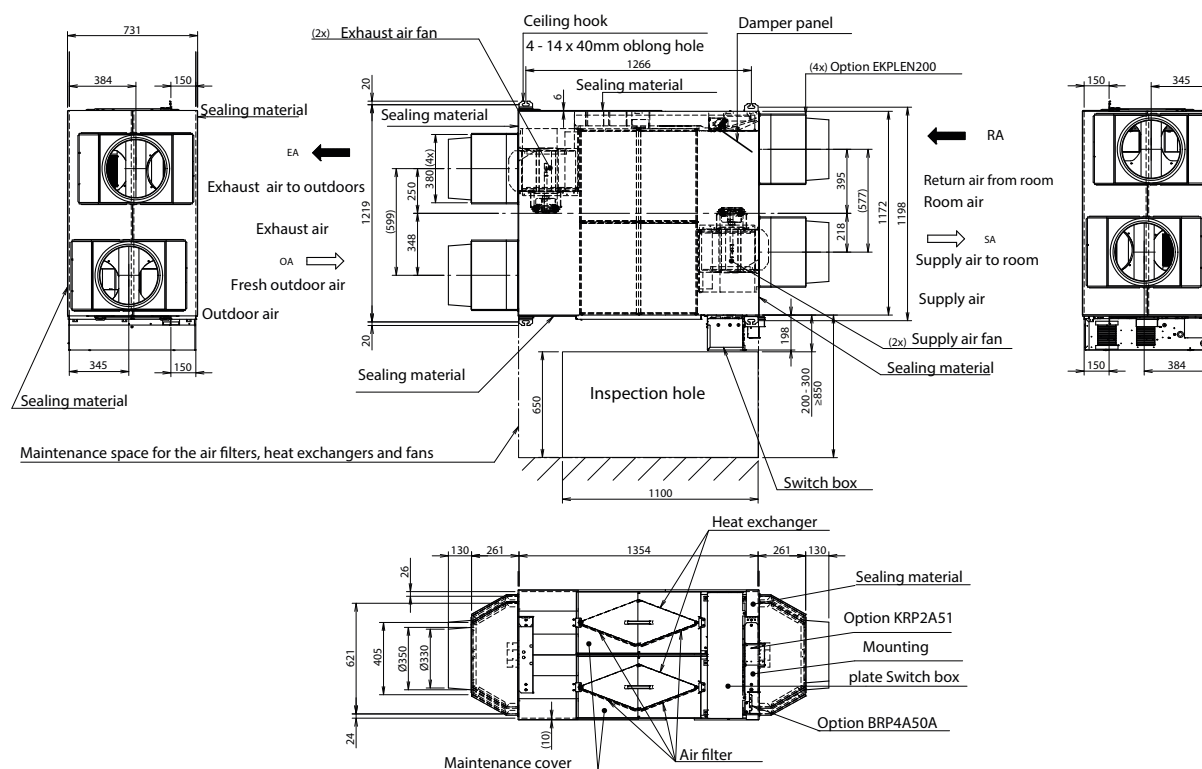


#### Notes:

1. To allow for the inspection of the air filters, heat exchangers, and fans, be sure to provide the inspection hole.

3D112818B



## VAM150FC

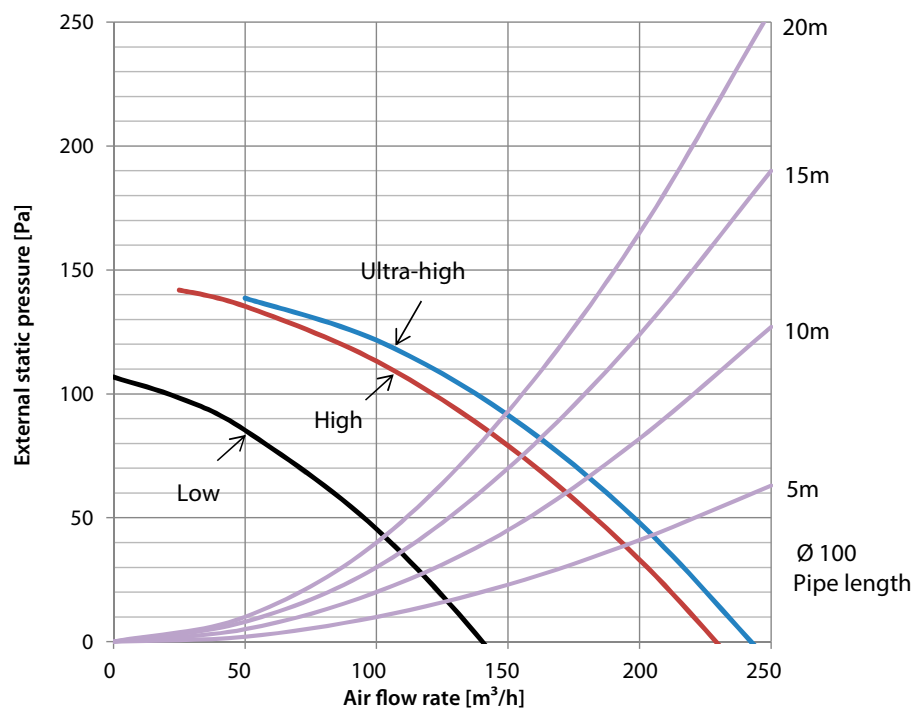


### Notes

1. The fan speeds are valid for ·230·V, ·50·Hz power supply.

4D100379



## VAM250FC



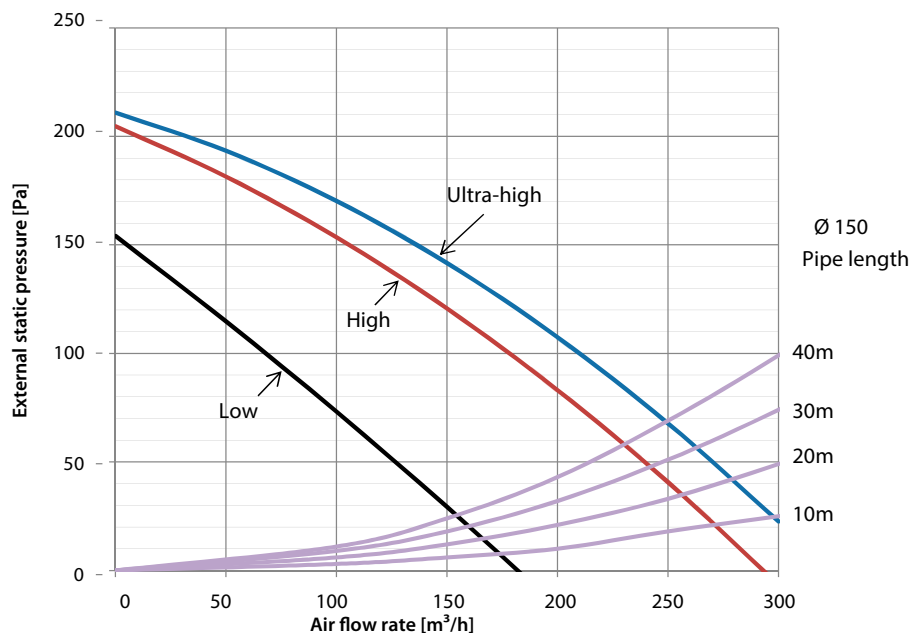


### Notes

1. The fan speeds are valid for ·230-V, ·50-Hz power supply.

4D100380

## VAM350J

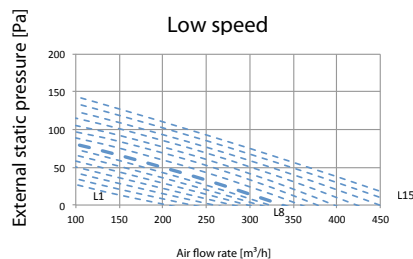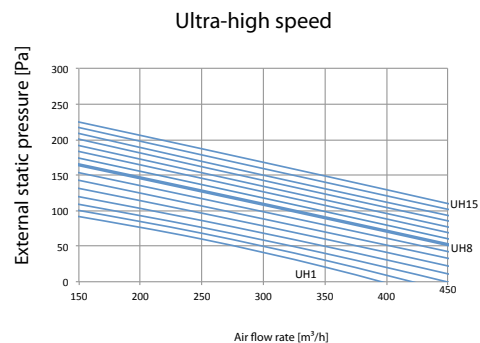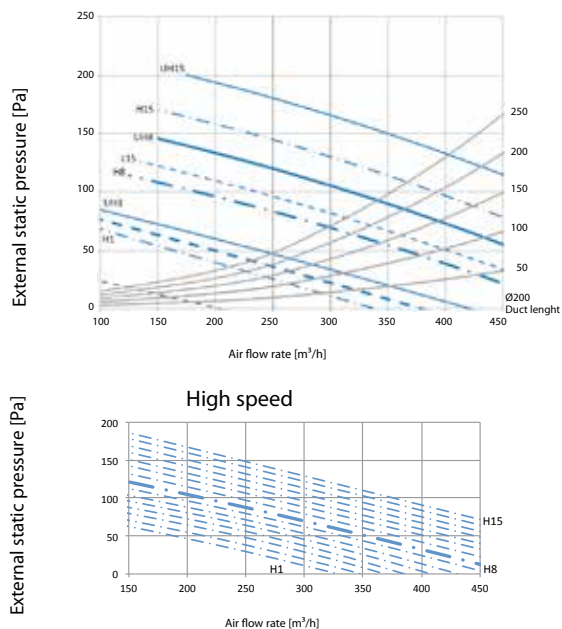

### Notes

1. The fan curves are determined with ·1/3· of the ESP on the outdoor side (·EA & OA·), and ·2/3· of the ESP on the indoor side (·RA & SA·).

EA= Exhaust air  
OA= Outdoor air  
RA= Room air  
SA= Supply air

2. Measured according to ·JIS B 8628 - 2003·

— Ultra-high speed  
- · - · High speed  
- - - Low speed





### Legend

- L1 = Low speed lower limit
- L8 = Low speed factory setting
- L15 = Low speed upper limit
- H1 = High speed lower limit
- H8 = High speed factory setting
- H15 = High speed upper limit
- UH1 = Ultra-high speed lower limit
- UH8 = Ultra-high speed factory setting
- UH15 = Ultra-high speed upper limit

3D113493



## VAM500J

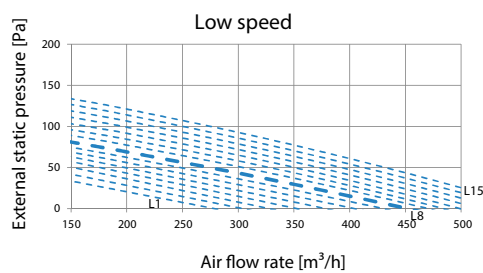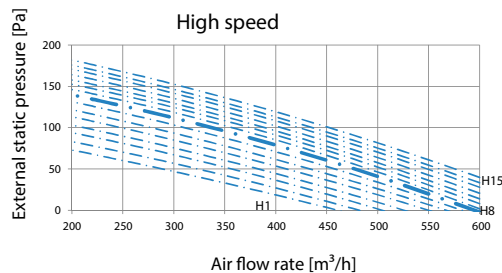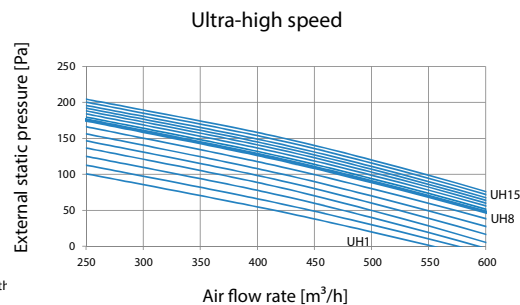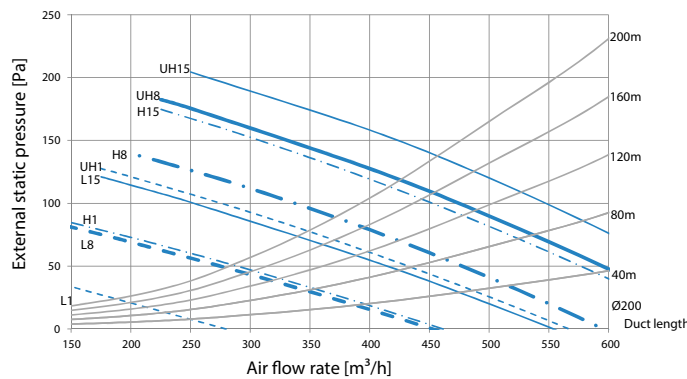

### Notes

- The fan curves are determined with  $\frac{1}{3}$  of the ESP on the outdoor side (EA & OA), and  $\frac{2}{3}$  of the ESP on the indoor side (RA & SA).  
EA = Exhaust air  
OA = Outdoor air  
RA = Room air  
SA = Supply
- Measured according to JIS B 8628 - 2003.





— Ultra-high speed  
- - - High speed  
- - - Low speed

### Legend

L1= Low speed lower limit  
L8= Low speed factory setting  
L15= Low speed upper limit  
H1= High speed lower limit  
H8= High speed factory setting  
H15= High speed upper limit  
UH1= Ultra-high speed lower limit  
UH8= Ultra-high speed factory setting  
UH15= Ultra-high speed upper limit

3D113494

## VAM650J

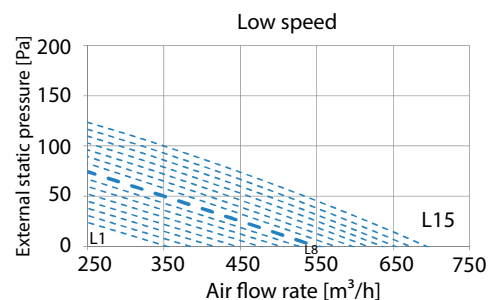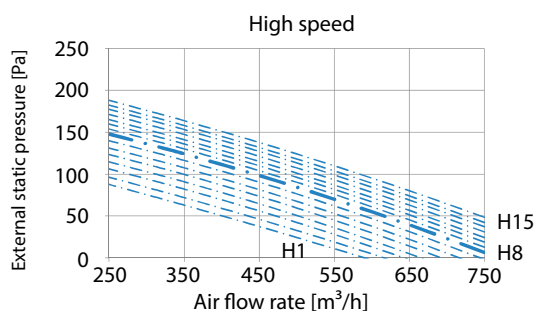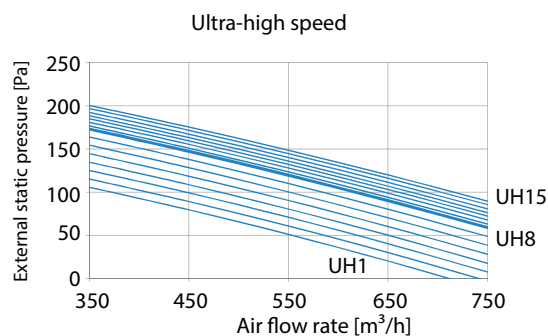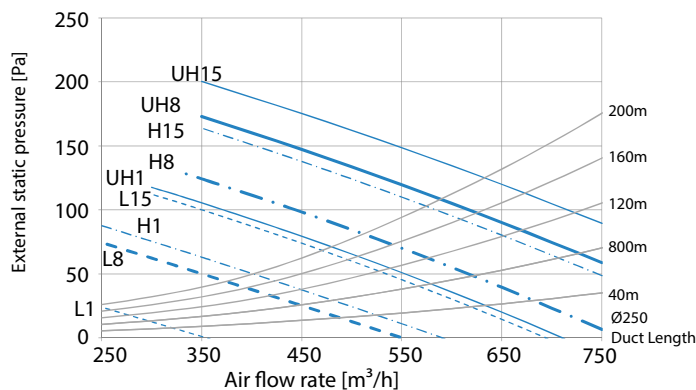

### Notes





- The fan curves are determined with  $\frac{1}{3}$  of the ESP on the outdoor side (EA & OA), and  $\frac{2}{3}$  of the ESP on the indoor side (RA & SA).  
EA = Exhaust air  
OA = Outdoor air  
RA = Room air  
SA = Supply air
- Measured according to JIS B 8628 - 2003.

— Ultra-high speed  
- - - High speed  
- - - Low speed


### Legend

L1= Low speed lower limit  
L8= Low speed factory setting  
L15= Low speed upper limit  
H1= High speed lower limit  
H8= High speed factory setting  
H15= High speed upper limit  
UH1= Ultra-high speed lower limit  
UH8= Ultra-high speed factory setting  
UH15= Ultra-high speed upper limit

3D113495A

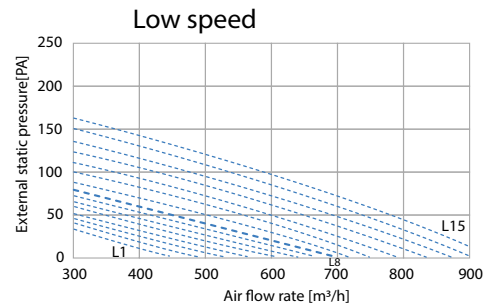
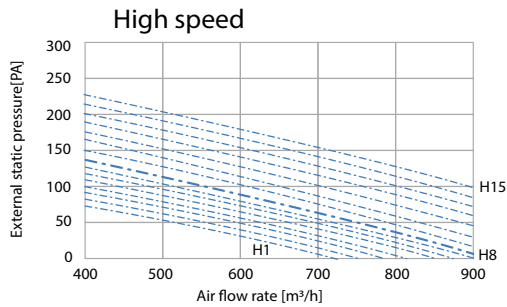
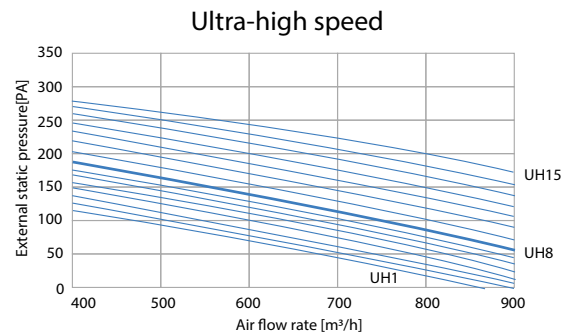
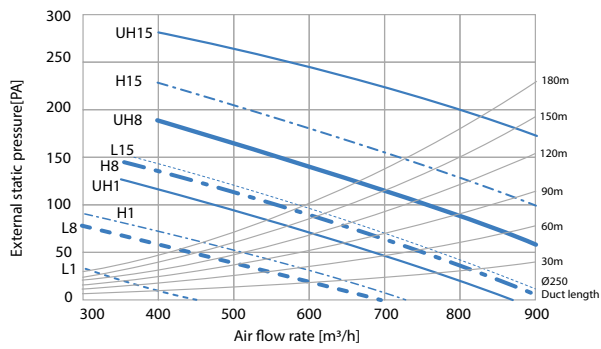
**VAM800J****Notes**

- The fan curves are determined with  $\cdot 1/3 \cdot$  of the ESP on the outdoor side (-EA & OA-), and  $\cdot 2/3 \cdot$  of the ESP on the indoor side (-RA & SA-).  
EA = Exhaust air  
OA = Outdoor air  
RA = Room air  
SA = Supply air
- Measured according to JIS B 8628 - 2003.

**Legend**

- L1= Low speed lower limit
- L8= Low speed factory setting
- L15= Low speed upper limit
- H1= High speed lower limit
- H8= High speed factory setting
- H15= High speed upper limit
- UH1= Ultra-high speed lower limit
- UH8= Ultra-high speed factory setting
- UH15= Ultra-high speed upper limit


3D112837

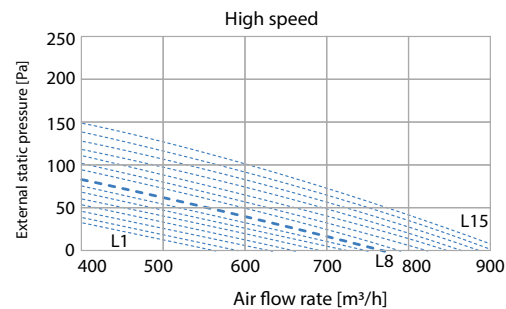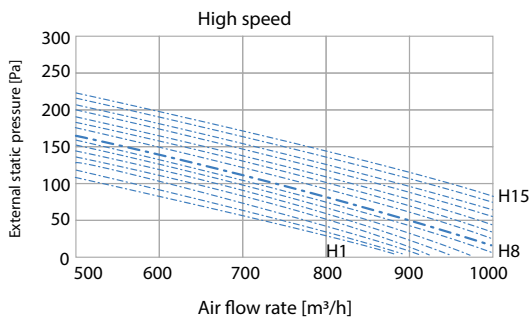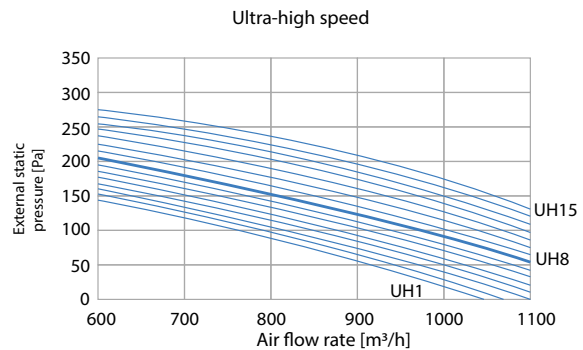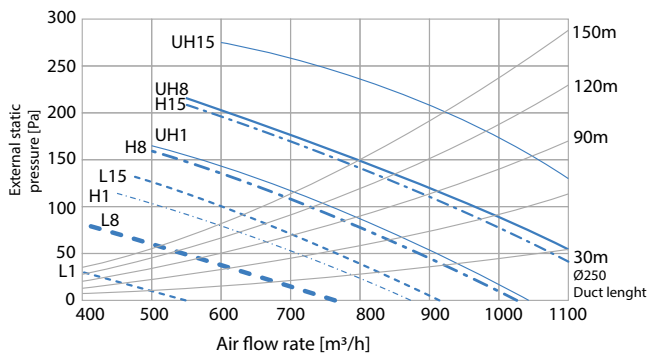**VAM1000J****Notes**

- The fan curves are determined with  $\cdot 1/3 \cdot$  of the ESP on the outdoor side (-EA & OA-), and  $\cdot 2/3 \cdot$  of the ESP on the indoor side (-RA & SA-).

EA= Exhaust air  
OA = Outdoor air  
RA= Room air  
SA= Supply air

- Measured according to JIS B 8628 - 2003.





**Legend**

- L1 = Low speed lower limit
- LB = Low speed factory setting
- L15 = Low speed upper limit
- H1 = High speed lower limit
- H8 = High speed factory setting
- H15 = High speed upper limit
- UH1 = Ultra-high speed lower limit
- UH8 = Ultra-high speed factory setting
- UH15 = Ultra-high speed upper limit

3D112832



## VAM1500J

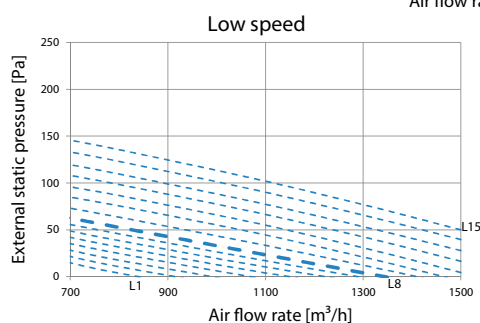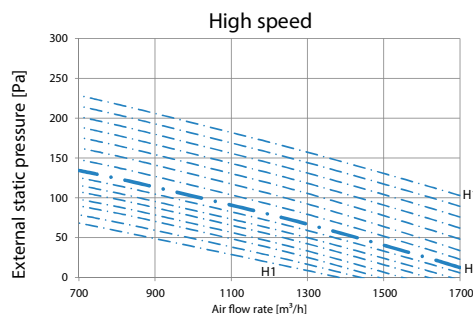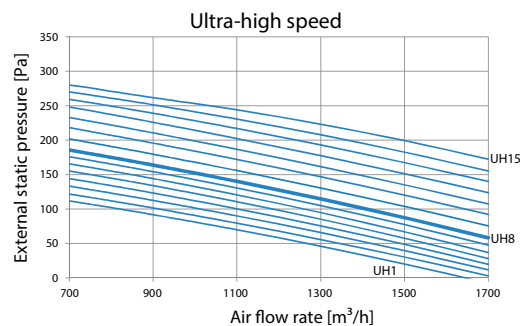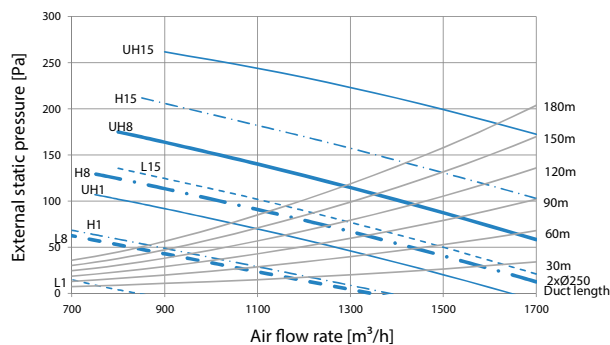

### Notes

1. The fan curves are determined with 1/3- of the ESP on the outdoor side (-EA & OA-), and 2/3- of the ESP on the indoor side (-RA & SA-).

EA = Exhaust air

OA = Outdoor air

RA = Room air

SA = Supply air

2. Measured according to JIS B 8628 - 2003.





— Ultra-high speed  
- - - High speed  
- - - Low speed

### Legend

L1 = Low speed lower limit  
L8 = Low speed factory setting  
L15 = Low speed upper limit  
H1 = High speed lower limit  
H8 = High speed factory setting  
H15 = High speed upper limit  
UH1 = Ultra-high speed lower limit  
UH8 = Ultra-high speed factory setting  
UH15 = Ultra-high speed upper limit

3D112838

## VAM2000J

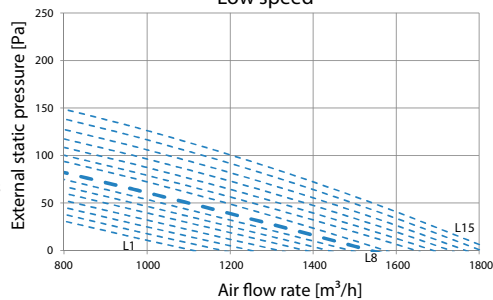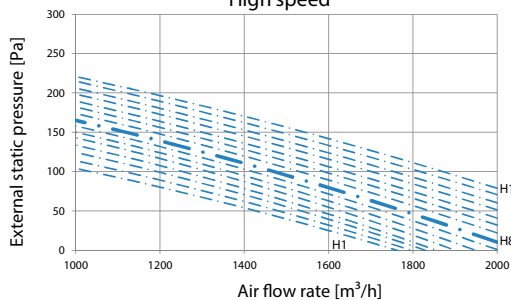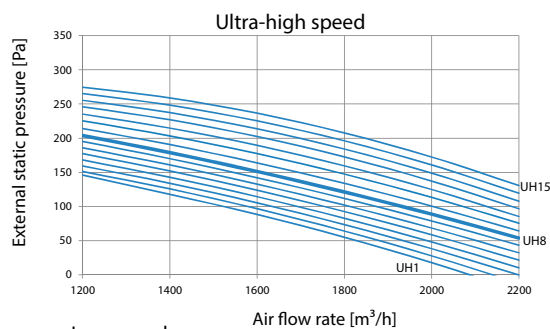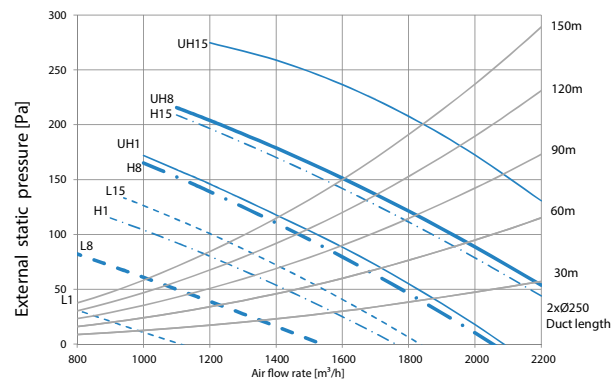

### Notes

1. The fan curves are determined with 1/3- of the ESP on the outdoor side (-EA & OA-), and 2/3- of the ESP on the indoor side (-RA & SA-).

EA=Exhaust air

OA=Outdoor air

RA=Room air

SA=Supply air

2. Measured according to JIS B 8628 - 2003.

— Ultra-high speed  
- - - High speed  
- - - Low speed


### Legend

L1 = Low speed lower limit  
L8 = Low speed factory setting  
L15 = Low speed upper limit  
H1 = High speed lower limit  
H8 = High speed factory setting  
H15 = High speed upper limit  
UH1 = Ultra-high speed lower limit  
UH8 = Ultra-high speed factory setting  
UH15 = Ultra-high speed upper limit

3D112839

## Detailed technical drawings

### VKM50GB

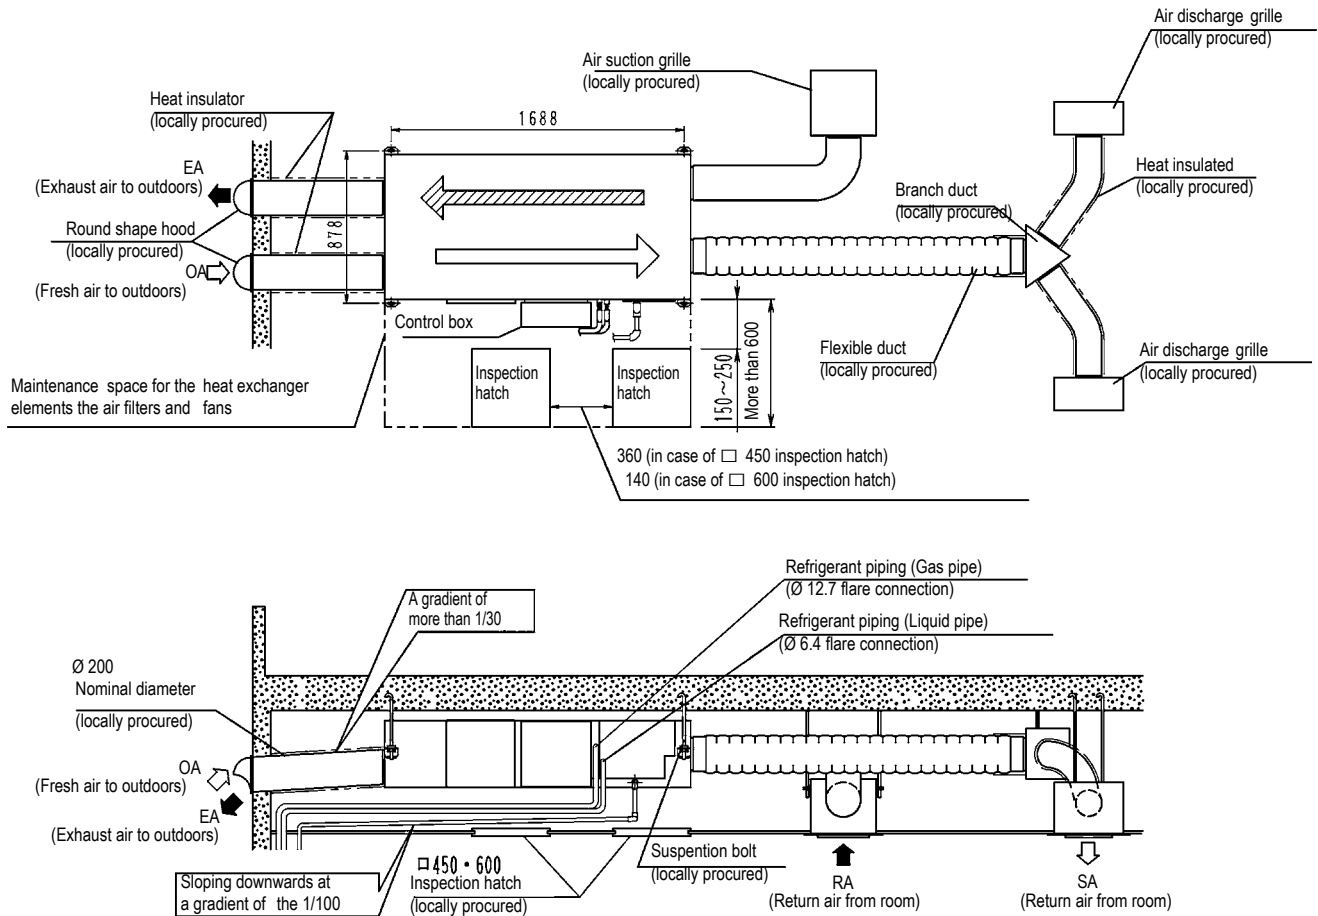


#### NOTES

1. Leave space for servicing the unit and include inspection hatch. (Always open a hole on the side of the control box so that the air filters heat exchange elements, and fans can easily be inspected and serviced.)
2. Install the two outdoor ducts with down slope (slope of 1/30 or more) to prevent entry of rain water, also, provide insulation for three ducts (outdoor ducts and indoor supply air duct) to prevent dew condensation. (Material: glass wool of 25mm thick)
3. Do not turn the unit upside down.
4. Make sure to install drain piping, and insulate drain piping to prevent dew condensation.
5. Keep the drain pipe short and sloping downwards at a gradient of at least 1/100 to prevent air from forming.
6. Do not use a bent cap or a round hood as the outdoor hood if they might get rained on directly (we recommend using a deep hood) (optional accessory).
7. In areas where freezing may occur, always take steps to prevent the pipes from freezing.
8. Do not place something which shouldn't get wet at the below of this unit. The dew would fall at following case, where humidity is 80% more, or the exit of drain socket is choked up, or the air filter is very dirty.

3D083014

## VKM50GBM

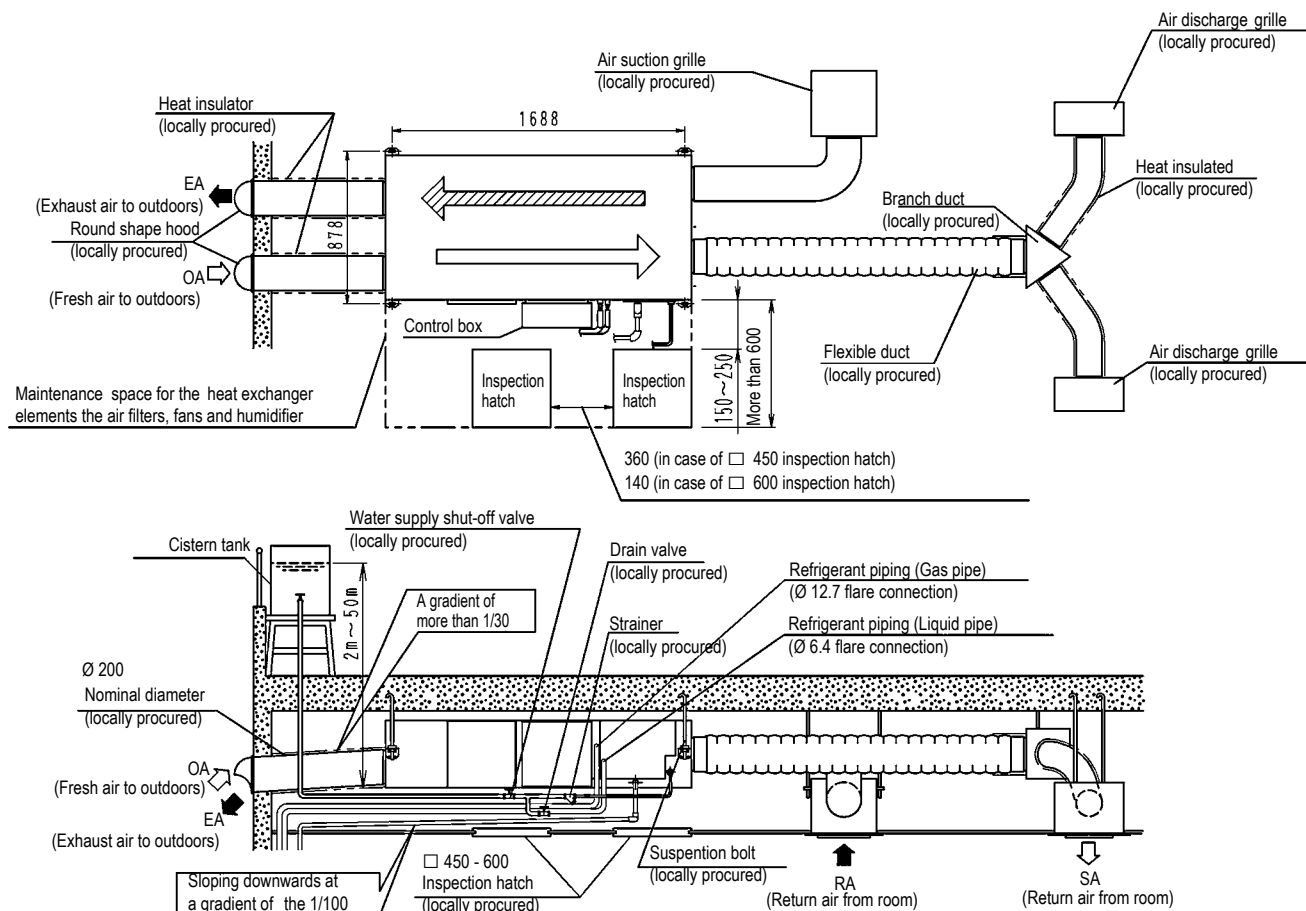


### NOTES

1. Leave space for servicing the unit and include inspection hatch. (Always open a hole on the side of the control box so that the air filters heat exchange elements, and fans can easily be inspected and serviced.)
2. Install the two outdoor ducts with down slope (slope of 1/30 or more) to prevent entry of rain water, also, provide insulation for three ducts (outdoor ducts and indoor supply air duct) to prevent dew condensation. (Material: glass wool of 25mm thick)
3. Do not turn the unit upside down.
4. Use city water or clean water.  
Include water supply piping with strainer, a water supply shut-off valve, and a drain valve (both locally procured) somewhere along the water supply piping that can be reached from the inspection.
5. It is impossible to connect the water supply piping directly to public piping. Use a cistern tank (of the approved type), if you need to get your water supply from public piping.
6. Make sure the supply water 0.02MPa to 0.49MPa (0.2 kg/cm<sup>2</sup> to 5 kg/cm<sup>2</sup>)
7. Make sure the supply water is between 5°C and 40°C in temperature.
8. Insulate the water supply piping to prevent condensation from forming.
9. Make sure to install drain piping, and insulate drain piping to prevent dew condensation.
10. Keep the drain pipe short and sloping downwards at a gradient of at least 1/100 to prevent air from forming.
11. Install in a location where the air around the unit or taken into the humidifier will not drop below 0°C.
12. Do not use a bent cap or a round hood as the outdoor hood if they might get rained on directly (we recommend using a deep hood) (optional accessory).
13. In areas where freezing may occur, always take steps to prevent the pipes from freezing.
14. Do not place something which shouldn't get wet at the below of this unit. The dew would fall at following case, where humidity is 80% more, or the exit of drain socket is choked up, or the air filter is very dirty.
15. Feed clean water. If the supply water is hard water, use a water softener because of short life.  
Life of humidifying element is about 3 years (4,000 hours), under the supply water conditions of hardness: 150 mg/L. (Life of humidifying element is about 1 years (1500 hours), under the supply water conditions of hardness: 400 mg/L.)

3D083011

## Detailed technical drawings


## VKM80GB

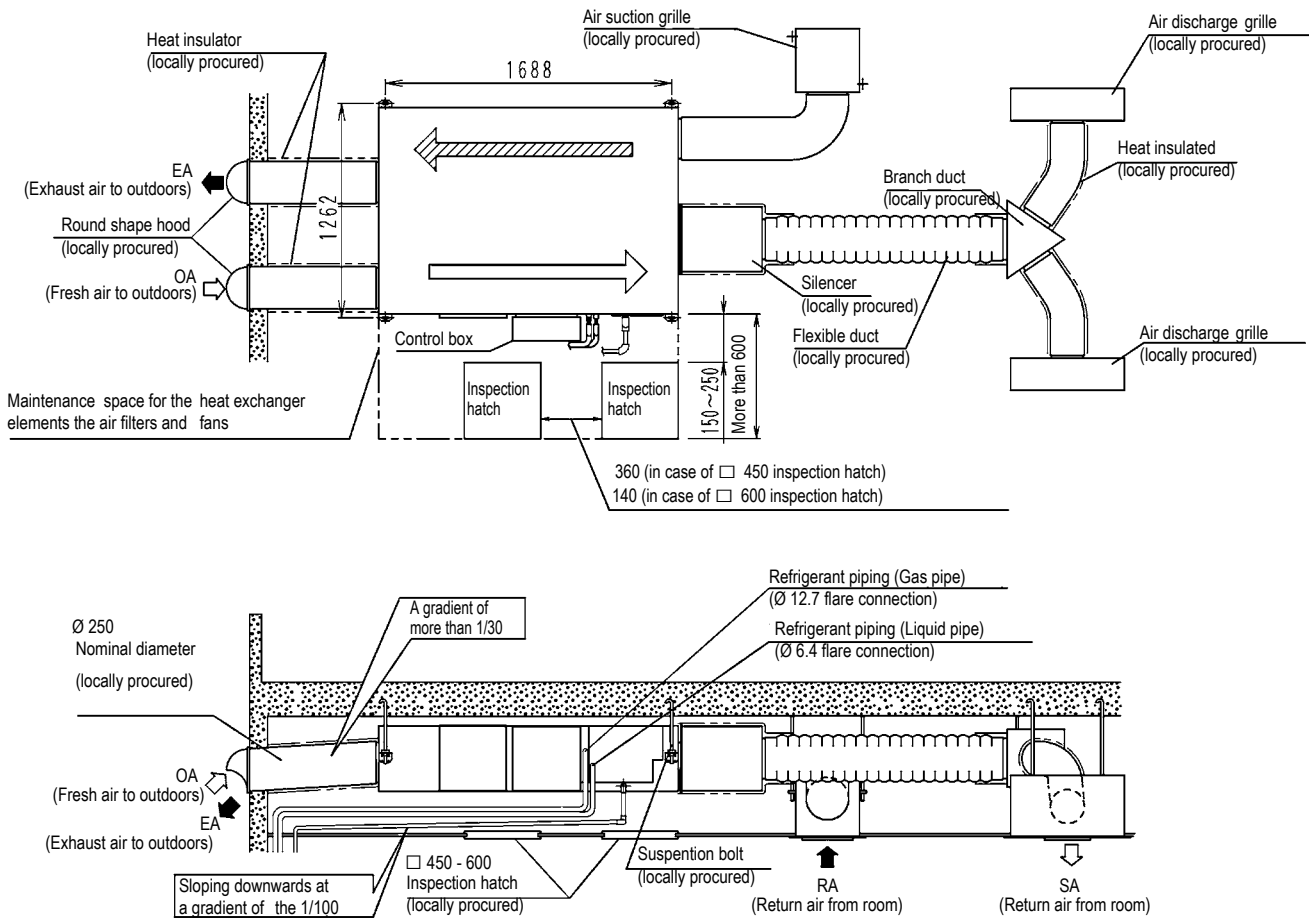

## NOTES

1. Leave space for servicing the unit and include inspection hatch. (Always open a hole on the side of the control box so that the air filters heat exchange elements, and fans can easily be inspected and serviced.)
2. Install the two outdoor ducts with down slope (slope of 1/30 or more) to prevent entry of rain water, also, provide insulation for three ducts (outdoor ducts and indoor supply air duct) to prevent dew condensation. (Material: glass wool of 25mm thick)
3. Do not turn the unit upside down.
4. Make sure to install drain piping, and insulate drain piping to prevent dew condensation.
5. Keep the drain pipe short and sloping downwards at a gradient of at least 1/100 to prevent air from forming.
6. Do not use a bent cap or a round hood as the outdoor hood if they might get rained on directly (we recommend using a deep hood) (optional accessory).
7. In areas where freezing may occur, always take steps to prevent the pipes from freezing.
8. Do not place something which shouldn't get wet at the below of this unit. The dew would fall at following case, where humidity is 80% more, or the exit of drain socket is choked up, or the air filter is very dirty.

## VKM80GBM

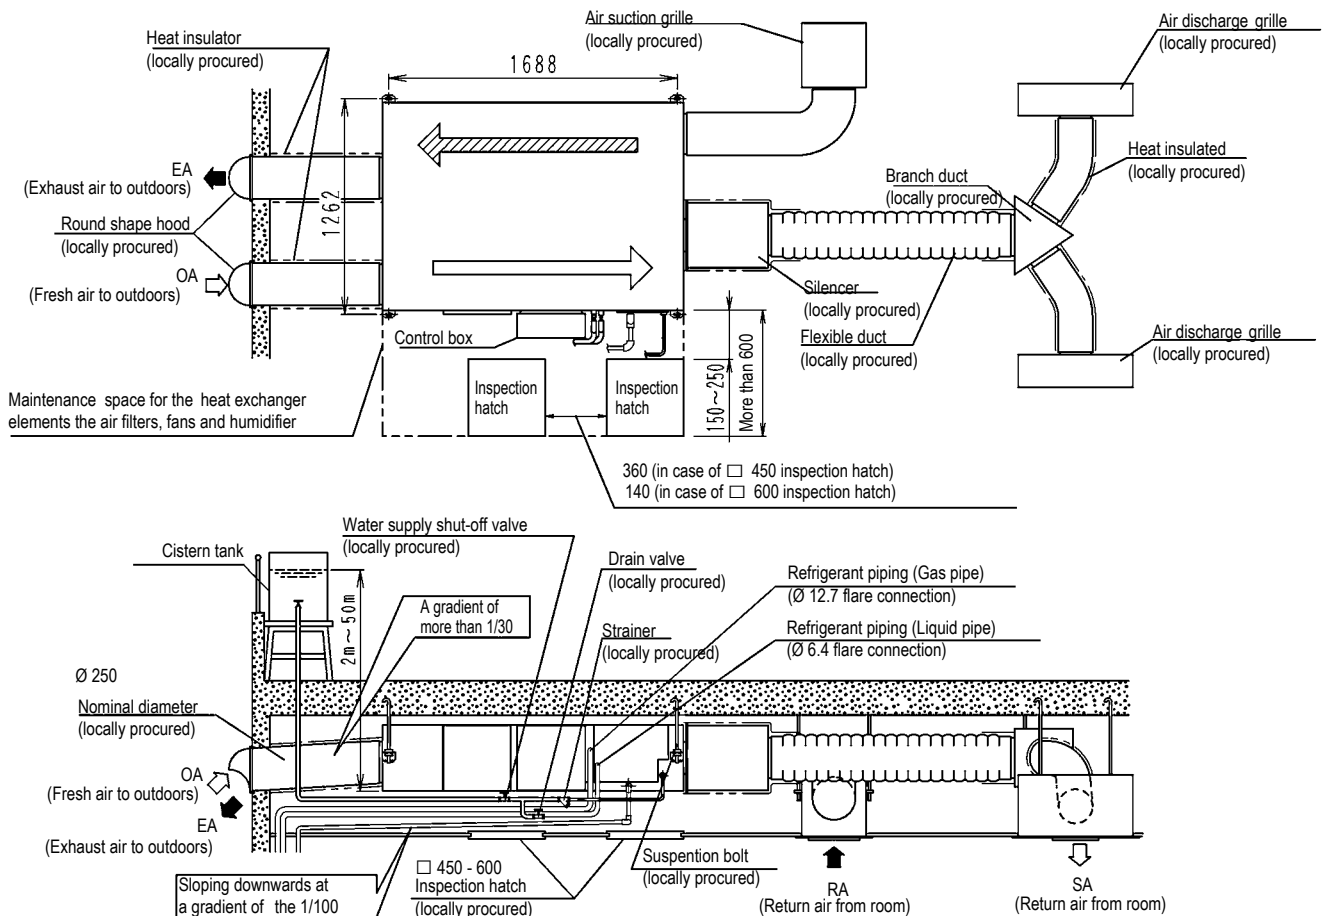


### NOTES

- Leave space for servicing the unit and include inspection hatch. (Always open a hole on the side of the control box so that the air filters heat exchange elements, and fans can easily be inspected and serviced.)
- Install the two outdoor ducts with down slope (slope of 1/30 or more) to prevent entry of rain water, also, provide insulation for three ducts (outdoor ducts and indoor supply air duct) to prevent dew condensation. (Material: glass wool of 25mm thick)
- Do not turn the unit upside down.
- Use city water or clean water.  
Include water supply piping with strainer, a water supply shut-off valve, and a drain valve (both locally procured) somewhere along the water supply piping that can be reached from the inspection
- It is impossible to connect the water supply piping directly to public piping. Use a cistern tank (of the approved type), if you need to get your water supply from public piping.
- Make sure the supply water 0.02MPa to 0.49MPa (0.2 kg/cm<sup>2</sup> to 5 kg/cm<sup>2</sup>)
- Make sure the supply water is between 5°C and 40°C in temperature.
- Insulate the water supply piping to prevent condensation from forming.
- Make sure to install drain piping, and insulate drain piping to prevent dew condensation.
- Keep the drain pipe short and sloping downwards at a gradient of at least 1/100 to prevent air from forming.
- Install in a location where the air around the unit or taken into the humidifier will not drop below 0°C.
- Do not use a bent cap or a round hood as the outdoor hood if they might get rained on directly (we recommend using a deep hood) (optional accessory).
- In areas where freezing may occur, always take steps to prevent the pipes from freezing.
- Do not place something which shouldn't get wet at the below of this unit. The dew would fall at following case, where humidity is 80% more, or the exit of drain socket is choked up, or the air filter is very dirty.
- Feed clean water. If the supply water is hard water, use a water softener because of short life.  
Life of humidifying element is about 3 years (4,000 hours), under the supply water conditions of hardness: 150 mg/L. (Life of humidifying element is about 1 years (1500 hours), under the supply water conditions of hardness: 400 mg/L.)

3D083012

## Detailed technical drawings

## VKM100GB

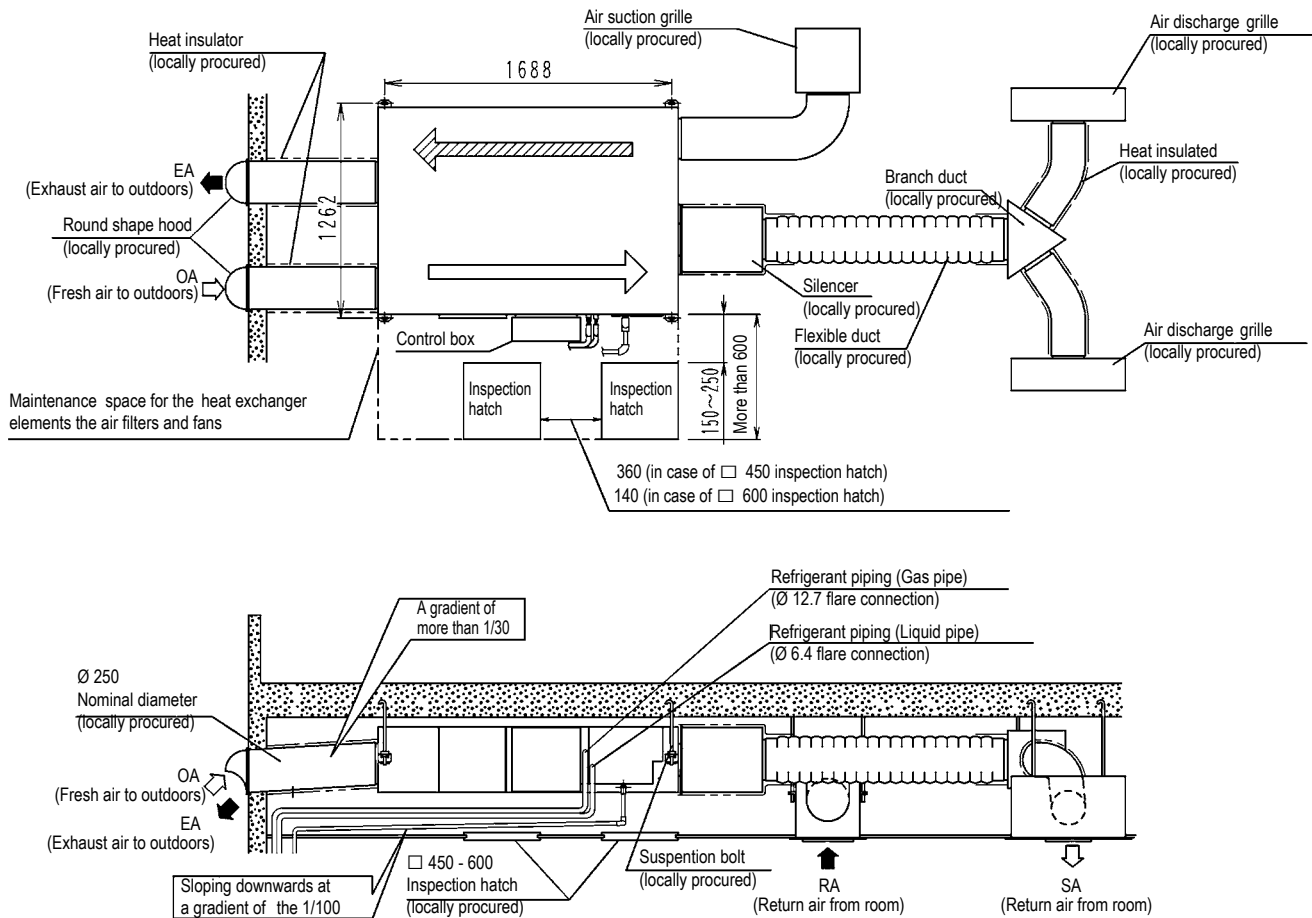


## NOTES

1. Leave space for servicing the unit and include inspection hatch. (Always open a hole on the side of the control box so that the air filters heat exchange elements, and fans can easily be inspected and serviced.)
2. Install the two outdoor ducts with down slope (slope of 1/30 or more) to prevent entry of rain water, also, provide insulation for three ducts (outdoor ducts and indoor supply air duct) to prevent dew condensation. (Material: glass wool of 25mm thick)
3. Do not turn the unit upside down.
4. Make sure to install drain piping, and insulate drain piping to prevent dew condensation.
5. Keep the drain pipe short and sloping downwards at a gradient of at least 1/100 to prevent air from forming.
6. Do not use a bent cap or a round hood as the outdoor hood if they might get rained on directly (we recommend using a deep hood) (optional accessory).
7. In areas where freezing may occur, always take steps to prevent the pipes from freezing.
8. Do not place something which shouldn't get wet at the below of this unit. The dew would fall at following case, where humidity is 80% more, or the exit of drain socket is choked up, or the air filter is very dirty.

3D083016

## VKM100GBM

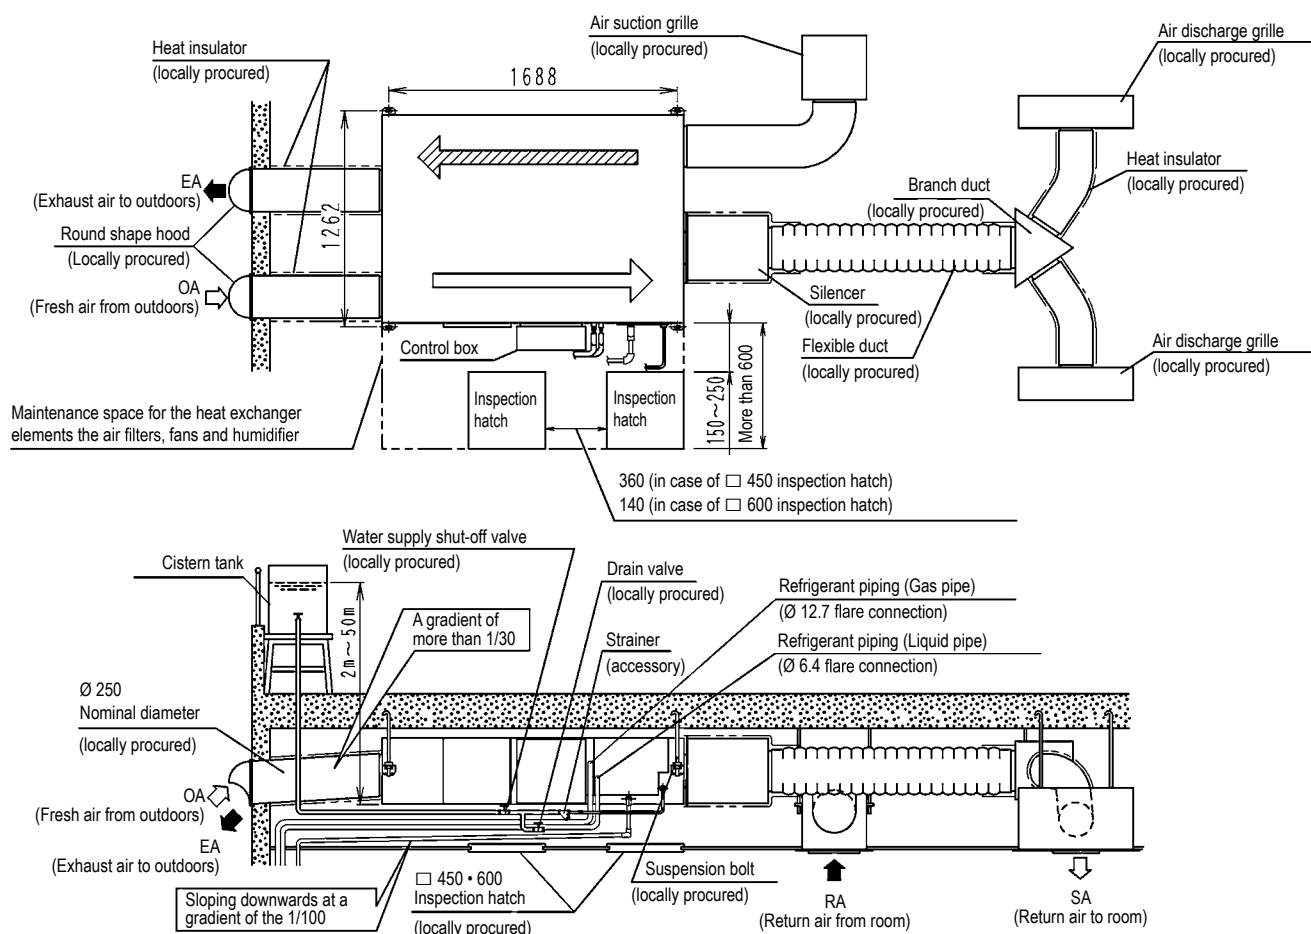


### NOTES

1. Leave space for servicing the unit and include inspection hatch. (Always open a hole on the side of the control box so that the air filters, heat exchange elements, fans and humidifier elements can easily be inspected and serviced.)
2. Install the two outdoor ducts with down slope (slope of 1/30 or more) to prevent entry of rain water. Also, provide insulation for three ducts (outdoor ducts and indoor supply air duct) to prevent dew condensation. (Material: glass wool of 25mm thick)
3. Do not turn the unit upside down.
4. Use city water or clean water.  
Include water supply piping with strainer, a water supply shut-off valve, and a drain valve (both locally procured) somewhere along the water supply piping that can be reached from the inspection.
5. It is impossible to connect the water supply piping directly to public piping. Use a cistern tank (of the approved type), if you need to get your water supply from public piping.
6. Make sure the supply water 0.02MPa to 0.49MPa (0.2 kg/cm<sup>2</sup> to 5 kg/cm<sup>2</sup>)
7. Make sure the supply water is between 5°C and 40°C in temperature.
8. Insulate the water supply piping to prevent condensation from forming.
9. Make sure to install drain piping, and insulate drain piping to prevent dew condensation.
10. Keep the drain pipe short and sloping downwards at a gradient of at least 1/100 to prevent air from forming.
11. Install in a location where the air around the unit or taken into the humidifier will not drop below 0°C.
12. Do not use a bent cap or a round hood as the outdoor hood if they might get rained on directly (we recommend using a deep hood) (optional accessory).
13. In areas where freezing may occur, always take steps to prevent the pipes from freezing.
14. Do not place something which shouldn't get wet at the below of this unit. The dew would fall at following case, where humidity is 80% more, or the exit of drain socket is choked up, or the air filter is very dirty.
15. Feed clean water. If the supply water is hard water, use a water softener because of short life.  
Life of humidifying element is about 3 years (4,000 hours), under the supply water conditions of hardness: 150 mg/L. (Life of humidifying element is about 1 years (1500 hours), under the supply water conditions of hardness: 400 mg/L.)

3D083013

## VKM50GB

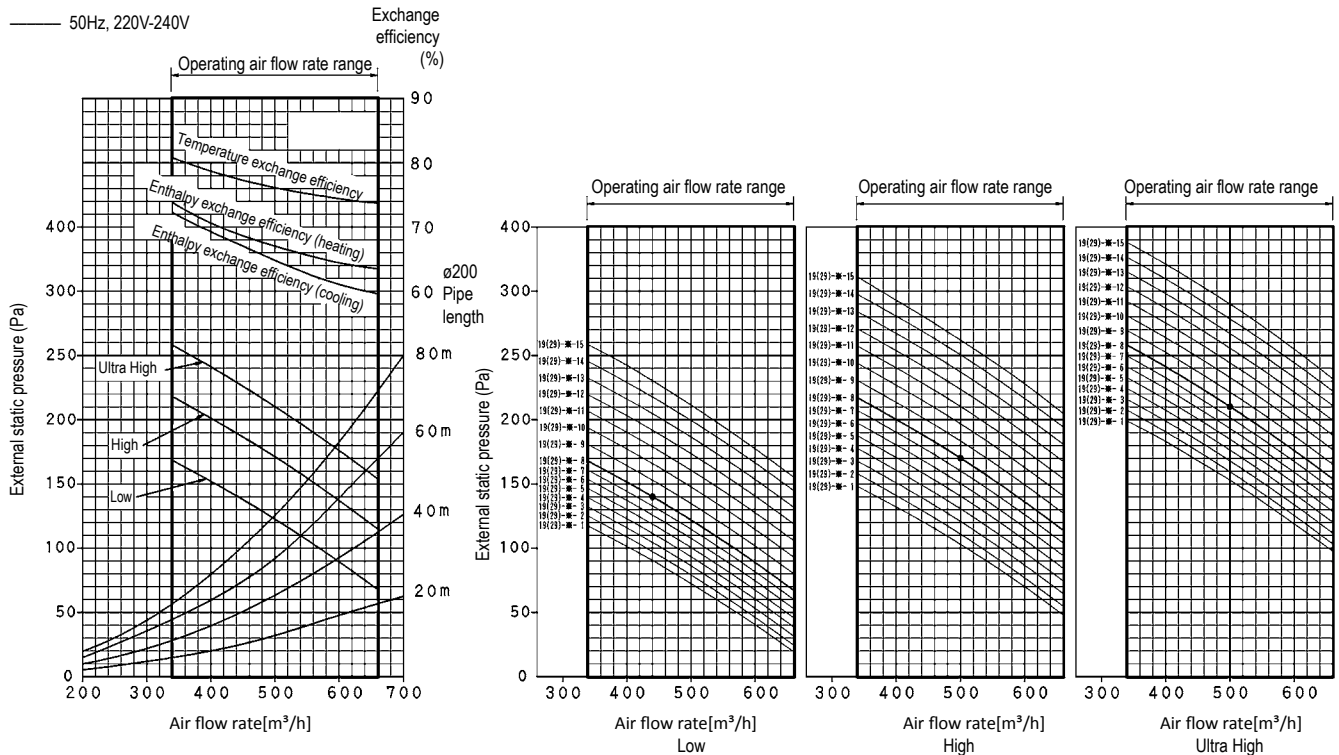


[Reading of Performance Characteristics]

- 1) For example: 19(29)-~~✳~~07  
Mode no. : 19(29)  
First code: ✳ (Supply 「 2 」 Exhaust 「 3 」)  
Second code no. : 07
- 2) Rated point: ●
- 3) The characteristic of each tap becomes a setup of the characteristic of the same code number.

3D082904

## VKM50GBM

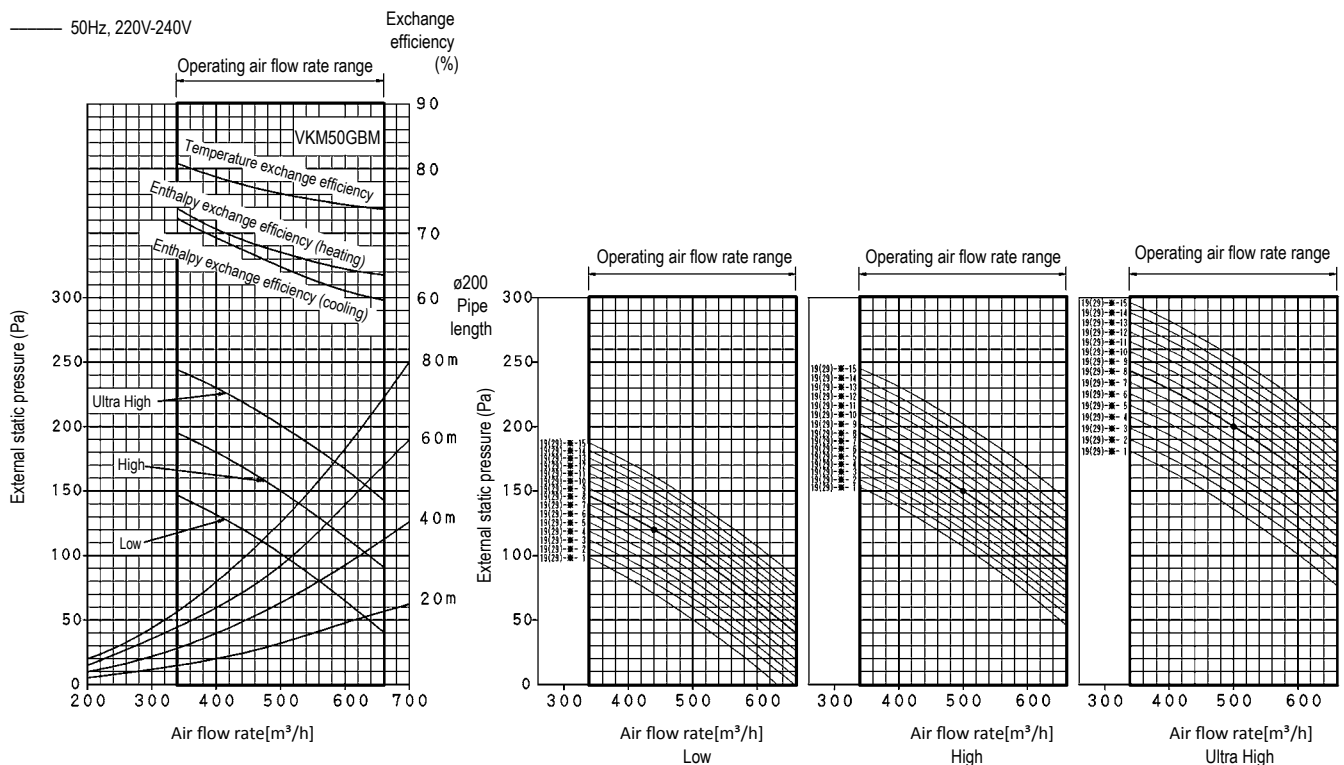


[Reading of Performance Characteristics]

- 1) For example: 19(29)-※-07  
 Mode no. : 19(29)  
 First code: ※ (Supply 「2」 Exhaust 「3」)  
 Second code no. : 07
- 2) Rated point: ●
- 3) The characteristic of each tap becomes a setup of the characteristic of the same code number.

3D082901

## VKM80GB

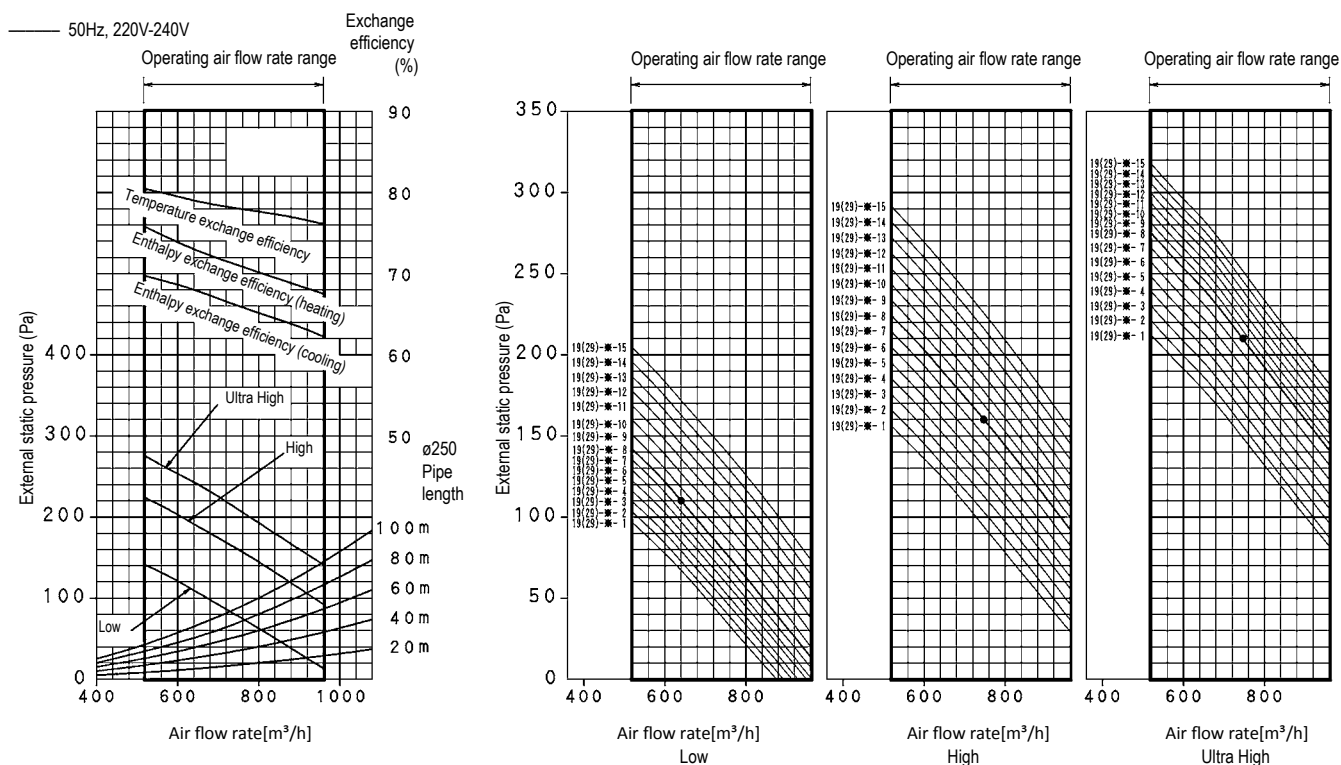


[Reading of Performance Characteristics]

- 1) For example: 19(29)-~~✱~~-07  
 Mode no. : 19(29)  
 First code: ✱ (Supply 「 2 」 Exhaust 「 3 」 )  
 Second code no. : 07
- 2) Rated point: ●
- 3) The characteristic of each tap becomes a setup of the characteristic of the same code number.

3D082905

## VKM80GBM

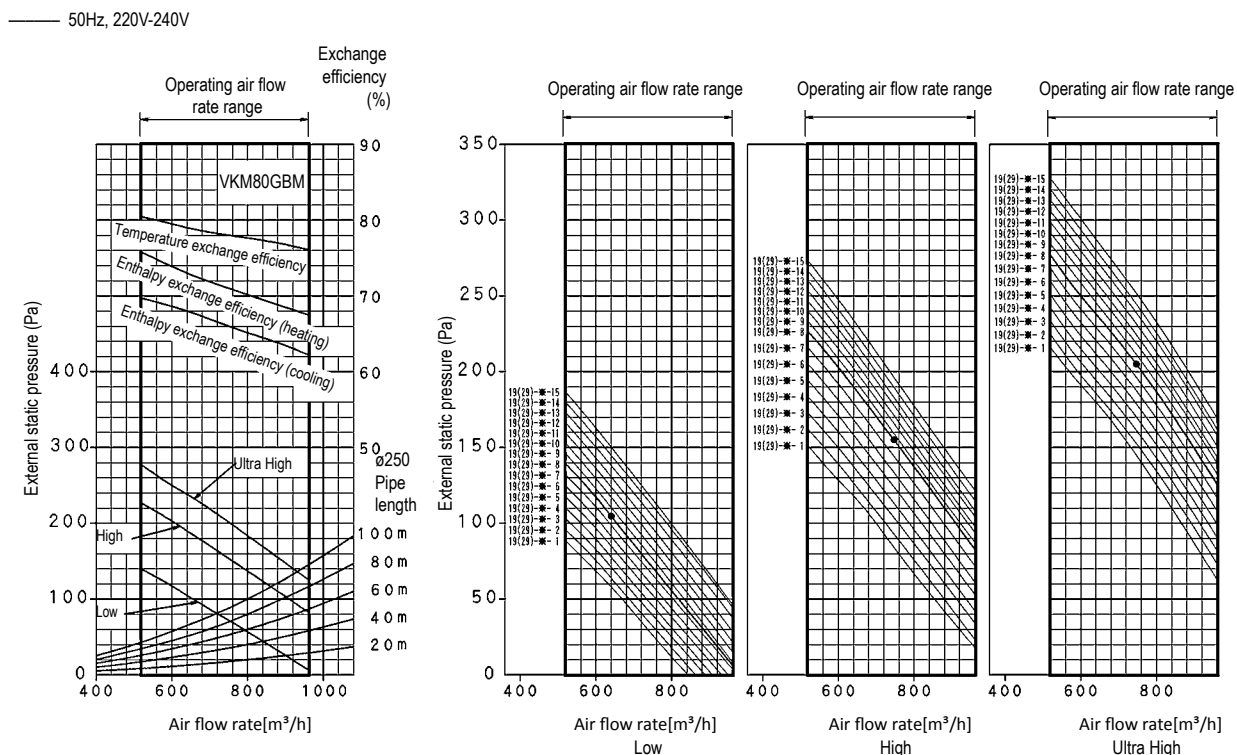


[Reading of Performance Characteristics]

- 1) For example: 19(29)-**✱**-07  
 Mode no. : 19(29)  
 First code: **✱** (Supply 「2」 Exhaust 「3」)  
 Second code no. : 07
- 2) Rated point: ●
- 3) The characteristic of each tap becomes a setup of the characteristic of the same code number.

3D082902

## VKM100GB

—— 50Hz, 220V-240V

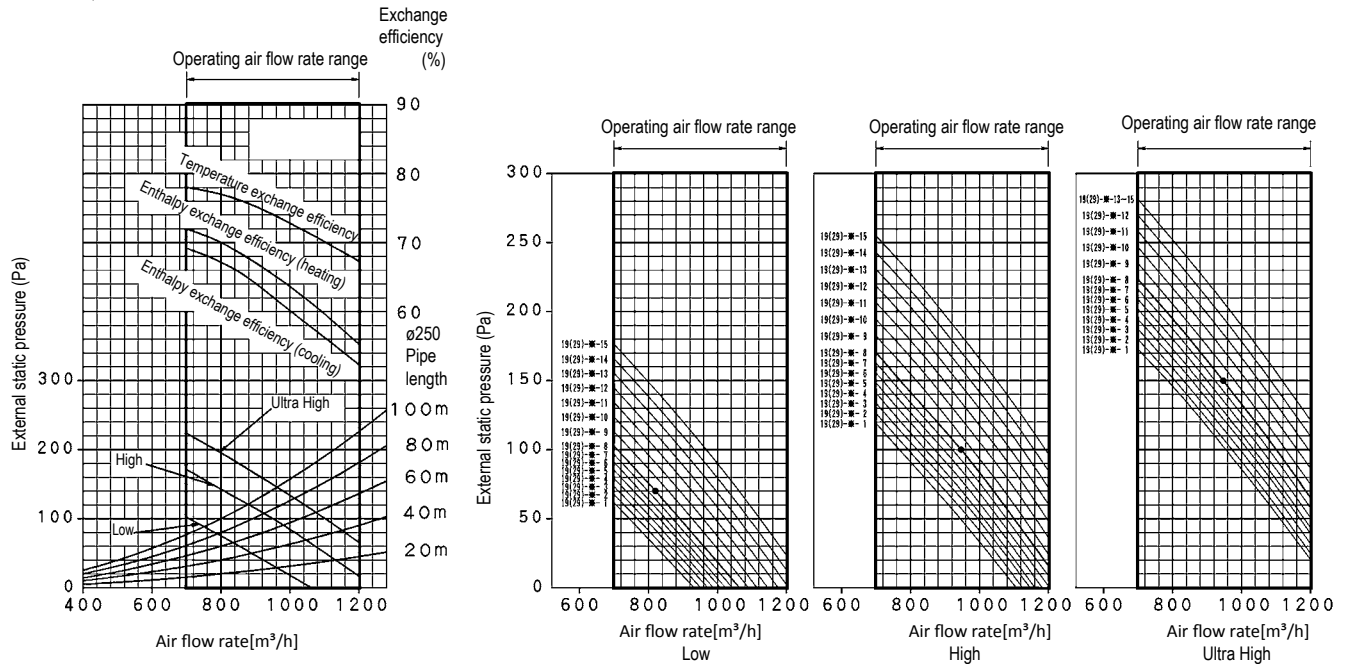

[Reading of Performance Characteristics]


- 1) For example: 19(29)-~~2~~-07  
 Mode no. : 19(29)  
 First code: ~~2~~ (Supply 「 2 」 Exhaust 「 3 」)  
 Second code no. : 07
- 2) Rated point: ●
- 3) The characteristic of each tap becomes a setup of the characteristic of the same code number.

3D082906

## VKM100GBM

— 50Hz, 220V-240V

Exchange efficiency (%)

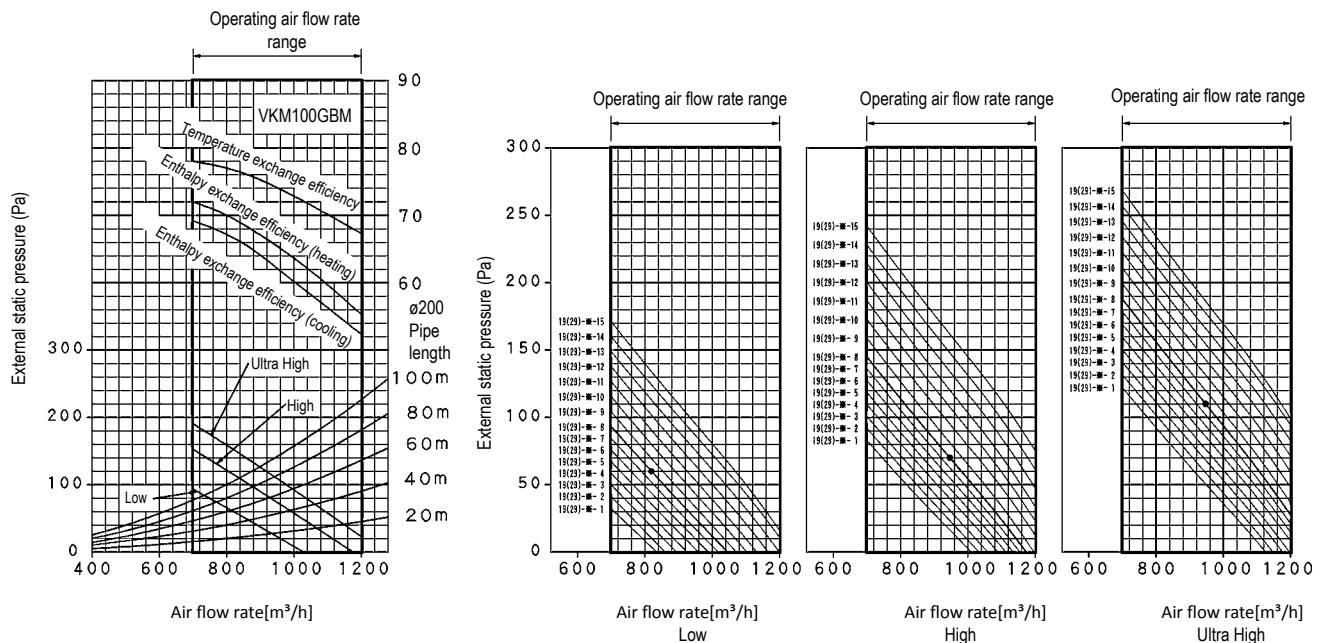

[Reading of Performance Characteristics]

- 1) For example: 19(29)-~~✱~~-07  
 Mode no. : 19(29)  
 First code: ✱ (Supply 「2」 Exhaust 「3」)  
 Second code no. : 07
- 2) Rated point: ●
- 3) The characteristic of each tap becomes a setup of the characteristic of the same code number.

3D082903


Handwriting practice lines consisting of 20 sets of three horizontal dotted lines.

Handwriting practice lines consisting of 28 horizontal dotted lines.





**Daikin Europe N.V.** Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Publisher)



ECPEN19-203

12/18



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.