

Heating & Cooling

Indoor unit				FFQ25B	FFQ35B	FFQ50B	FFQ60B
Cooling capacity	Min./Nom./Max.	kW		-/2.5 (3)/-	-/3.4 (3)/-	0.9/4.7 (3)/5.6	-/5.80 (3)/-
Heating capacity	Min./Nom./Max.	kW		-/3.2 (4)/-	-/4.0 (4)/-	0.9/5.5 (4)/7.0	-/7.00 (4)/-
Power input	Cooling	Min./Nom./Max.	kW	-/0.73/-	-/1.10/-	0.45/1.80/2.26	-/2.07/-
	Heating	Min./Nom./Max.	kW	-/0.920/-	-/1.20/-	0.45/1.96/2.78	-/2.49/-
EER				3.42	3.09	2.61	2.80
COP				3.48	3.33		2.81
Annual energy consumption		kWh		365	550	900	1,035
Energy label	Cooling/Heating			A/B	B/C		D/D
Dimensions	Unit	HeightxWidthxDepth	mm	286x575x575			
	Unit		kg	17.5			
Weight	Unit		kg	17.5			
	Unit		kg	17.5			
Decoration panel	Model			BYFQ60BAW1			
	Colour			White (RAL9010)			
Dimensions	Unit	HeightxWidthxDepth	mm	55x700x700			
	Unit		kg	2.7			
Fan - Air flow rate	Cooling	High/Low	m ³ /min	9.0/6.5	10.0/6.5	12.0/8.0	41.0/32.0
	Heating	High/Low	m ³ /min	9.0/6.5	10.0/6.5	12.0/8.0	41.0/32.0
Sound power level	Cooling	High	dBA	46.5	49.0	53.0	58.0
	Heating	High/Low	dBA	29.5/24.5	32.0/25.0	36.0/27.0	-
Sound pressure level	Cooling	High/Low	dBA	29.5/24.5	32.0/25.0	36.0/27.0	-
	Heating	High/Low	dBA	29.5/24.5	32.0/25.0	36.0/27.0	-
Refrigerant	Type			R-410A			
Piping connections	Liquid	OD	mm	6.35			
	Gas	OD	mm	9.52			12.7
Power supply	Drain	OD	mm	15.9			
	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 230			

(1) Energy label: scale from A (most efficient) to G (less efficient) (2) Annual energy consumption: based on average use of 500 running hours per year at full load (nominal conditions) (3) Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m (4) Heating: indoor temp. 20°CDB, outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m (5) Sound values are measured in an anechoic room. (6) Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings. (7) The sound power level is an absolute value indicating the power which a sound source generates.

Outdoor unit				RXS25J	RXS35J	RXS50J	RXS60F
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285			
Weight	Unit		kg	34			
Fan - Air flow rate	Cooling	High/Low	m ³ /min	33.5/-	36.0/-	50.9/-	50.9/45.0
	Heating	High/Low	m ³ /min		28.3/-	45.0/-	46.3/46.3
Sound power level	Cooling	Nom./High	dBA	-/61		-/63	-/63
	Heating	High/Silent operation	dBA	46/43		48/44	49/46
Sound pressure level	Cooling	High/Silent operation	dBA	47/44		48/45	49/46
	Heating	High/Silent operation	dBA				
Operation range	Cooling	Ambient	Min.-Max. °CDB	-10-46			
	Heating	Ambient	Min.-Max. °CWB	-15-18			
Refrigerant	Type			R-410A			
Piping connections	Level difference	IU - OU	Max. m	15			
	Heat insulation			Both liquid and gas pipes			
Power supply	Total piping length	System	Actual m	-			
	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240			




Air Conditioners Heating & Cooling

SkyAir®

4-Way Blow Ceiling Mounted Cassette

- » Energy label:
Up to class A
- » Heat pump system
- » Inverter technology
- » Fits precisely
in standard modules
of 600x600mm
- » 4-way blow for
comfortable air
distribution
- » As silent
as rustling leaves

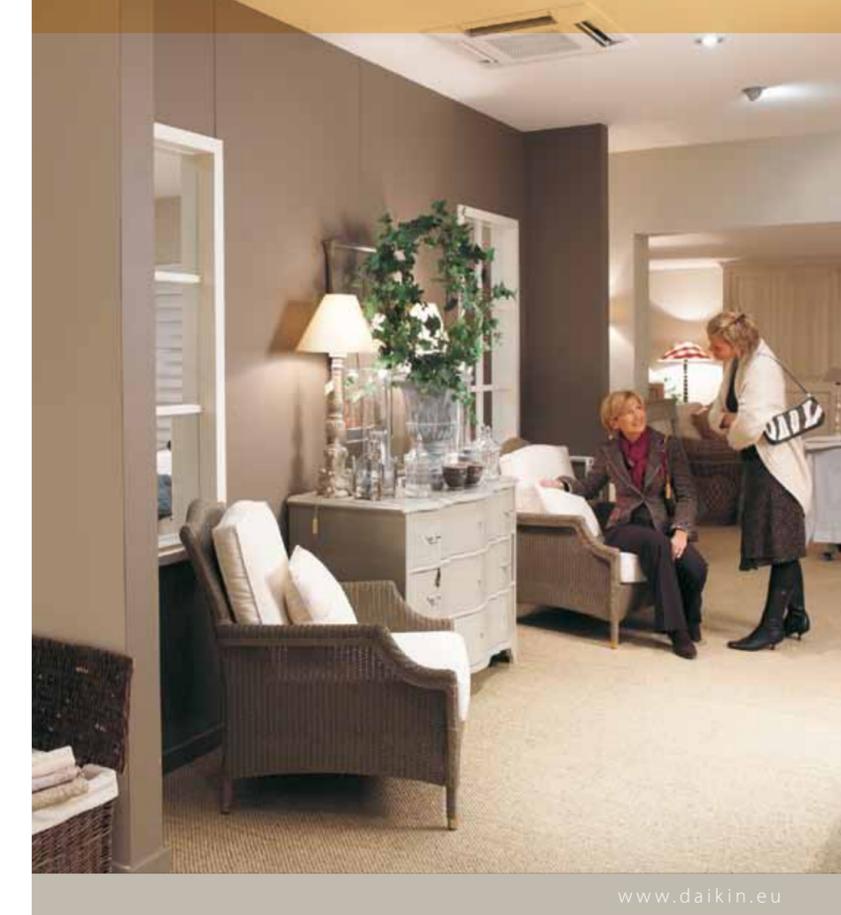

www.daikin.eu



Indoor unit FFQ-B



Wired remote control BRC1E51,
infrared remote control BRC7E530W



Outdoor unit
RXS50-60F



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe NV. Daikin Europe NV has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe NV explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe NV.



Daikin Europe NV participates in the Eurovent Certification programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FCU). The certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units.

FSC

ECPEN11-107

Daikin products are distributed by:

DAIKIN EUROPE N.V. Naamloze Venootschap - Zandvoordestraat 300, B-8400 Oostende - Belgium - www.daikin.eu - BE 0412 120 336 - RPR Oostende

ECPEN11-107-02/11 - Copyright Daikin
The present publication supersedes ECPEN10-107.
Printed on non-chlorinated paper. Prepared by La Movida, Belgium
Resp. Ed. Daikin Europe NV, Zandvoordestraat 300, B-8400 Oostende



FFQ-B

For a long time already, advanced heat pump systems have been far from a luxury in modern office buildings, shops, and restaurants. Changing climatic conditions and contemporary architecture with large glass partitions - in combination with an ever-increasing insulation performance - have resulted in one system which heats and cools becoming standard equipment. Daikin ceiling mounted cassettes are integrated perfectly into the ceiling, which enables you to keep all the available space for your furniture, equipment and decoration.

Combining highest efficiency and year-round comfort with a heat pump system



Did you know that ...

Air conditioners, also known as heat pumps, obtain 75% of their output renewable sources: the ambient air, which is both renewable and inexhaustible*. Of course, heat pumps also require electricity to run the system, but increasingly this electricity can also be generated from renewable energy sources (solar energy, wind energy, hydropower, biomass). A heat pump's efficiency is measured in COP (Coefficient Of Performance) for heating and EER (Energy Efficiency Ratio) for cooling.

* EU objective COM (2008)/30

Inverter technology

Daikin's inverter technology is a true innovation in the field of climate control. The principle is simple: inverters adjust the power used to suit the actual requirement - no more, no less! This technology provides you with two concrete benefits:


► Comfort:

The inverter repays its investment many times over by improving comfort. An air conditioning system with an inverter continuously adjusts its cooling and heating output to suit the temperature in the room thus improving comfort levels. The inverter reduces system start-up time enabling the required room temperature to be reached more quickly. As soon as the correct temperature is reached, the inverter ensures that it is constantly maintained.

► Energy efficient:

Because an inverter monitors and adjusts ambient temperature whenever needed, energy consumption drops by 30% compared to a traditional on/off system! (non-inverter).

Heating operation:

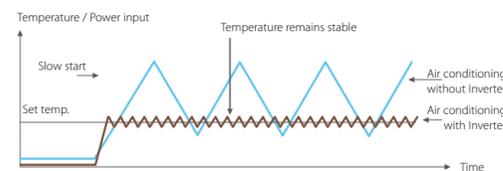


4-way blow for comfortable air distribution

As the name suggests, these units discharge air in four directions. An integrated air filter traps the tiniest dust particles and, in so doing, ensures a constant supply of clean air. The indoor unit distributes the air almost inaudibly: the sound levels are as low as 24.5 dBA, which corresponds to rustling leaves. For even greater comfort, you can choose between various settings by simply using the remote control.

> Autoswing


You have the choice of **three auto-swing positions** for maximum climate comfort: standard, draught prevention or ceiling soiling prevention. Since the flaps can be moved to a 0° position, draughts are virtually impossible.

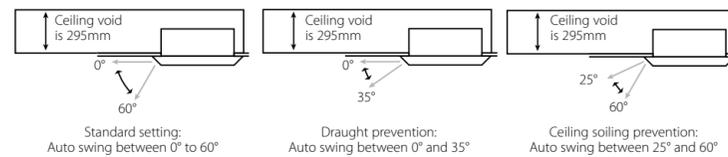

Flexible installation, Easy use

With a new decorative front panel in 'pure white' (RAL9010), the FFQ ceiling mounted cassette blends in discreetly with contemporary white ceilings. The ceiling mounted cassette is the ideal solution if heating or cooling is to be unobtrusive, such as in restaurants, shops, showrooms, museums, offices and sports centres.

- > The FFQ ceiling mounted unit can be fitted effortlessly in **shallow, false ceilings** - only 295 mm ceiling void is required. The compact casing enables this model to fit precisely in the standard architectural modules of 600 x 600 mm, so **ceiling tiles no longer need to be adjusted**.
- > It is possible to shut one or two discharge flaps off, enabling the cassette to be installed in a corner, a wall or a confined space.

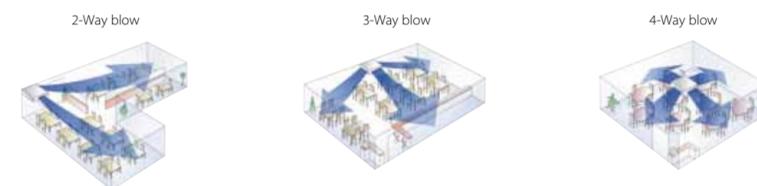

- > **The switch box** is inside the indoor unit. There is easy access from below for maintenance work. It is not even necessary to remove any ceiling tiles.
- > The indoor unit is easy control with a **wired or infrared remote control**.



- > The newly developed **wired remote control BRC1E51A** (optional) has a modern design in pure white (RAL 9010). Large buttons and arrow keys as well as the given explanation for each setting on the display, makes the remote control easy to operate. A holiday setting, home leave operation, and an improved weekly timer are included. The wired remote control is available in following languages: English, German, French, Spanish, Italian, Portuguese, Greek, Dutch, Russian and Turkish.
- > **Home leave operation :**
In case of extended absence, this function helps to save energy. If there is no one in the area for an extended period, e.g. during holidays or closing days, this function automatically sets the room temperature to a minimum of 10°C. At this point, all connected indoor units will switch over to heating mode. The function will be deactivated as soon as the room temperature reaches 15°C.
- > With the **optional ON / OFF function**, the air conditioner can, with a mobile phone, be switched on and off remotely. With this function you can also make the unit switch off automatically, e.g. when someone opens a window.
- > The **outdoor unit** can be installed on the roof, terrace or against an outside wall.

Application options

- > Depending on your air conditioning need, you can have your unit either **heat or cool (heat pump)**.
- > The indoor unit is suited to **pair application** (one indoor unit connected to one outdoor unit), **twin, triple or double twin applications** (a maximum of four indoor units in the same room to one outdoor unit) and **multi model application** (a maximum of nine indoor units in different rooms to one outdoor unit).