



Daikin Altherma 3 GEO

Ground Source Heat Pump



Groundbreaking innovation



Daikin Altherma 3 GEO Top performance even in coldest climate

The Daikin Altherma ground source heat pump uses geothermal energy and Daikin's inverter heat pump technology to deliver heating and hot water in all climates.



Space heating

During winter



Space cooling

Active cooling with high efficiency



Domestic hot water production

Integrated 180L stainless steel tank



Leaving water temperature up to 65°C, so the unit can work with underfloor heating but also with radiators.



Renovation and new build

Suitable for renovation: thanks to a high water temperature of 65°C output, the unit fits with classic radiators.

Suitable for new build: the Daikin Altherma 3 geo is also combinable with fan coils and underfloor piping.

BLUEEVOLUTION

Bluevolution technology using R-32, environmentally friendly refrigerant with a lower GWP, reducing its CO₂ equivalent by 73% compared to its predecessor R-410A.



Electricity savings

The continuous inverter operation allows a high modulation range down to 0.85kW, avoiding the unit to use more electricity to stop and start.



Daikin Altherma HPC provides heating or cooling for living rooms.

An 80-100 metre borehole in the ground creates a constant inlet temperature.


Care for peace of mind



The Daikin Altherma 3 GEO is designed to perform the best efficiencies in what matter the most: quietness and connectivity.



Extremely quiet operation

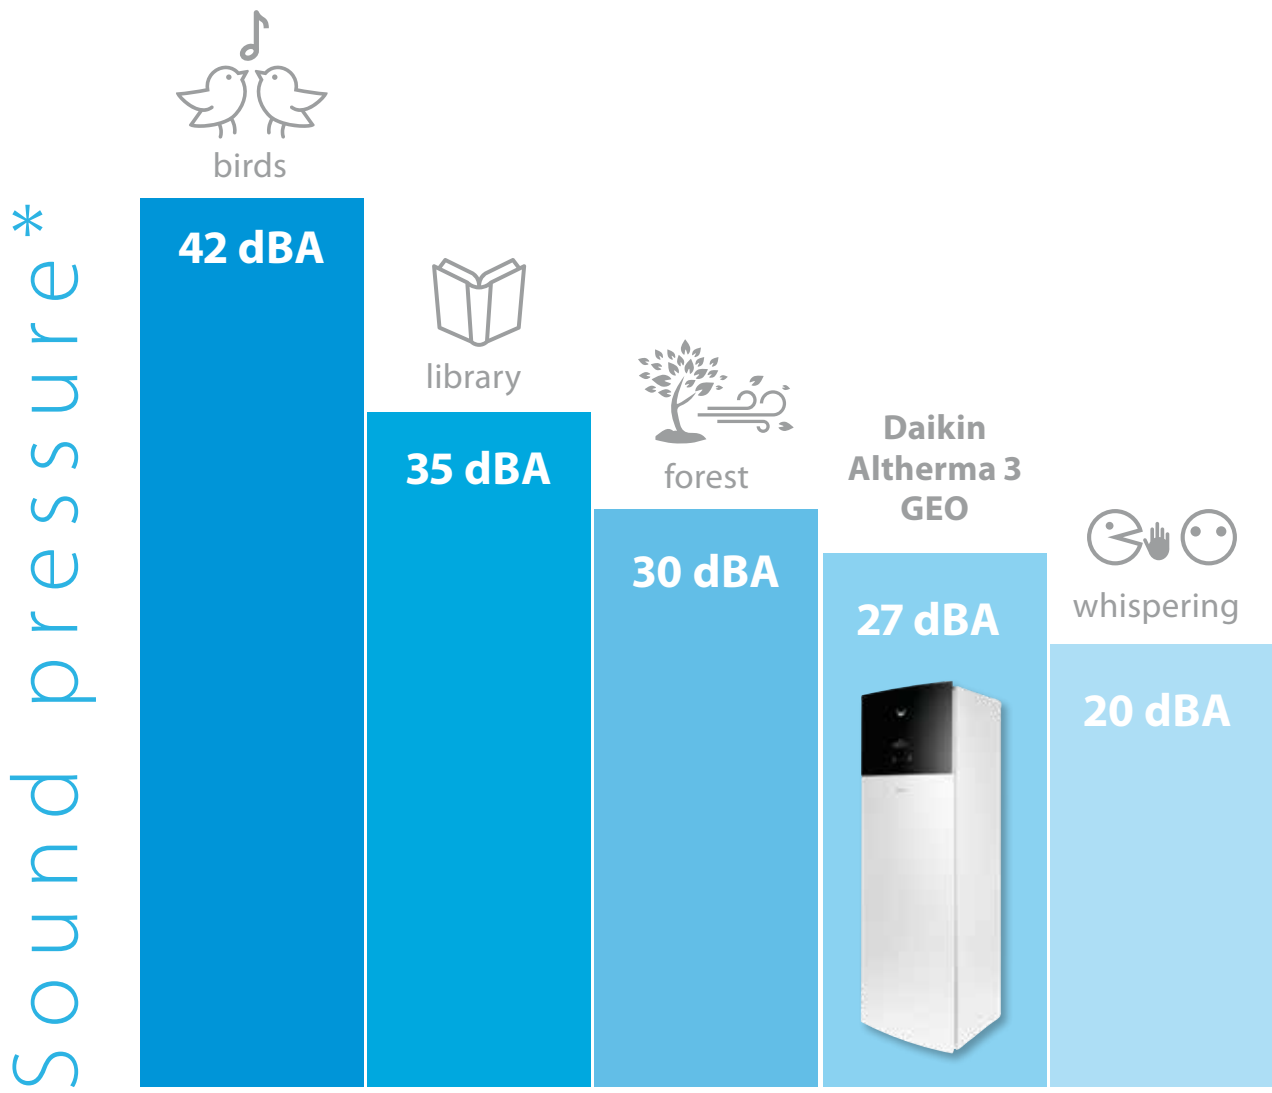

*at 1 meter.



Built-in connectivity

Control your home climate from any place, at any time



Daikin Residential Controller



Always in control.
Control your climate from any place, at any time.



Monitor the status of your heating system



Control the operation mode and set temperature



Schedule the set temperature and operation mode

Madoka wired remote controller for Daikin Altherma

A new generation of user interface, redesigned and intuitive.

- ✓ Intuitive control with a premium design
- ✓ Three colors to match any interior design
- ✓ Easily set operation parameters



BRC1HHDW



BRC1HHD S



BRC1HHDK



Groundbreaking innovation

Quick and easy installation thanks to factory-fitted piping on top of the unit, pre-cabled electrical connections and reduced overall weight.


All pipe connections on top, paired in and out



Standard electrical connections pre-cabled



Can easily be installed in confined spaces thanks to a small footprint and integrated handles



666 mm

Advanced user interface

The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.




Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.



Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on a USB stick and download it directly into the unit, or via the cloud.

Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The user interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.



1891 mm

597 mm

Removable compressor module, reducing the overall weight by 70 kg



Daikin Altherma 3 GEO

Ground source heat pump for heating, cooling & hot water

- › Top-level seasonal efficiency thanks to our inverter heat pump technology providing the highest savings on running costs.
- › Delivering temperatures up to 65°C at high efficiency, the R-32 Daikin Altherma 3 GEO is suitable for underfloor heating/cooling, fan coils and radiators.
- › Integrated indoor unit: all-in-one floor standing unit including the stainless steel domestic hot water tank saves space and installation time.
- › The unit has a similar footprint when compared to other household appliances.
- › Reversible heat pump, allowing heating and cooling.




Indoor Unit		EGSA	H06D9W	X06D9W(G)	H10D9W	X10D9W(G)		
Heating capacity	Min.	kW			0.85			
	Nom.	kW		3.34		5.48		
	Max.	kW		7.98		9.55		
Power input	Max.	kW		0.7		1.12		
	COP			4.74		4.89		
Space heating	Average climate water outlet 55°C	General	ηs (Seasonal space heating efficiency)	%	150	153	160	162
		General	Seasonal space heating eff. class	%			A+++	
	Average climate water outlet	General	ηs (Seasonal space heating efficiency)	%	214	219	210	213
Domestic hot water heating	General	Declared load profile	Average climate	Average climate	Water heating energy efficiency class	%		
	General	Water heating energy efficiency class	%			A+		
Space cooling	UFH	General	SEER	-	15	-	15	
			Pdesign	kW	-	8	-	8
	Fan Coil	General	SEER	-	14	-	14	
			Pdesign	kW	-	8	-	8
Casing	Colour		White or Silver-grey					
	Material		Precoated sheet metal					
Dimensions	Unit	HeightxWidthxDepth	mm					
Weight	Unit		kg					
Tank	Water volume		l					
		Insulation	Heat loss	kWh/24h				
	Corrosion protection		Pickling					
Operation range	Installation space	Min.~Max.	°C					
	Brine side	Min.~Max.	°C					
	Heating	Water side	Min.~Max.	°C				
	Domestic hot water	Water side	Min.~Max.	°C				
	Refrigerant	Type		R-32				
Sound power level	Nom.	dBA	39.0					
		dBA	27.0					
	Sound pressure level at 1 meter	Nom.		41.0				
Power supply	Name/Phase/Frequency/Voltage		Hz/V					
Current	Recommended fuses	A	3~/50/400 or 1~/50/230					
			3P 16A or 1P 32A					

Options

Type	Material name	
Controls	Remote user interface	BRC1HHDAAK/S/W
	Room thermostat (wired)	EKRTWA
	Room thermostat (wireless)	EKRTR1
Adapter	Cascade control	EKCC8-W
	Gateway	DCOM-LT/IO
	Gateway	DCOM-LT/MB
Sensor	Demand PCB	EKRP1AHTA
	Digital I/O PCB	EKRP1HBAA
	Remote indoor sensor	KRCS01-1
Valve	External sensor	EKRTETS
	Reduce power limitation sensor	EKCSSENS
	Valve kit	EKV1A/2A/3A
Others	PC cable	EKPCAB4
	Ground source filling kit	KG5FILL2
	Hydromodule replacement	EKGSYDMOD
	Separate power supply BUH	EKGSPOWCAB
	Magnetic filter Fernox	K.FERNOXTF1
	Magnetic filter Fernox	K.FERNOXTF1FL

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Publisher)



CEPEN20-751

04/20



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.