



Wineblock - Monoblock units for high temperature refrigeration

RCV




Reciprocating
compressor

Monoblock system suitable for through-wall installation


- › Accurate humidity and temperature control to guarantee the quality of products. Best for wine conservation and refinement
- › Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- › Electronic controller managing both temperature and humidity of the cold room

RCV

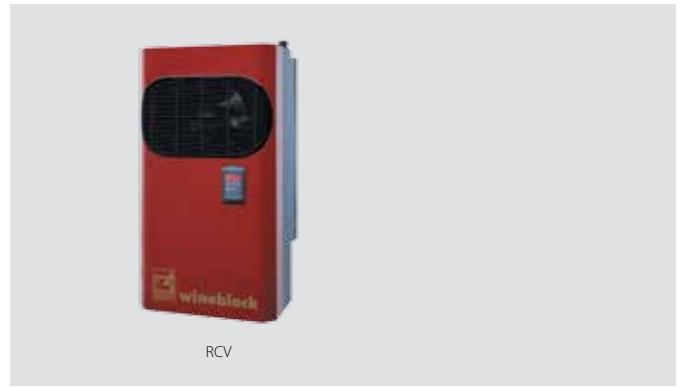

RCV

Installation type




				RCV	101527E	101528E	102527E	102528E
Refrigerating capacity	High temperature	R-134a	Nom	kW	0.6(1)		1(1)	
Heating capacity	R-134a		Nom	kW	0.7(1)		1.05(1)	
Dimensions	Unit	Height x Width x Depth		mm	735 x 400 x 435			
	Packed unit	Height x Width x Depth		mm	955 x 435 x 495			
Weight	Unit			kg	49	50	52	53
	Packed unit			kg	59	60	62	63
Compressor	Type				Hermetic Reciprocating			
	Nominal power			kW	0.25		0.37	
Operation range	Cold room temperature	Min. ~Max.		°C	10 ~20			
Refrigerant	Type				R-134a			
	GWP				1,430			
Evaporator	Air flow			m ³ /h	600			
	Air throw			m	4 (2)			
Condenser	Air flow			m ³ /h	600			
Power supply	Voltage / Phase / Frequency			V/Hz	230 / 1~ / 50			

				RCV	201527E	201528E	202527E	202528E
Refrigerating capacity	High temperature	R-134a	Nom	kW	1.4(1)		2.3(1)	
Heating capacity	R-134a		Nom	kW	1.4(1)		1.75(1)	
Dimensions	Unit	Height x Width x Depth		mm	735 x 620 x 435			
	Packed unit	Height x Width x Depth		mm	955 x 655 x 495			
Weight	Unit			kg	77	78	79	80
	Packed unit			kg	89	90	91	92
Compressor	Type				Hermetic Reciprocating			
	Nominal power			kW	0.46		0.55	
Operation range	Cold room temperature	Min. ~Max.		°C	10 ~20			
Refrigerant	Type				R-134a			
	GWP				1,430			
Evaporator	Air flow			m ³ /h	1,200			
	Air throw			m	4 (2)			
Condenser	Air flow			m ³ /h	1,200			
Power supply	Voltage / Phase / Frequency			V/Hz	230 / 1~ / 50			

(1) When normally running: +10°C / +30°C

(2) Use air throw as a base. Air throw is affected by many factors such as height of room, product storage, location of evaporator, etc. Contains Fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN17-829

10/17



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.